


ZTA.70.LV Eutrac

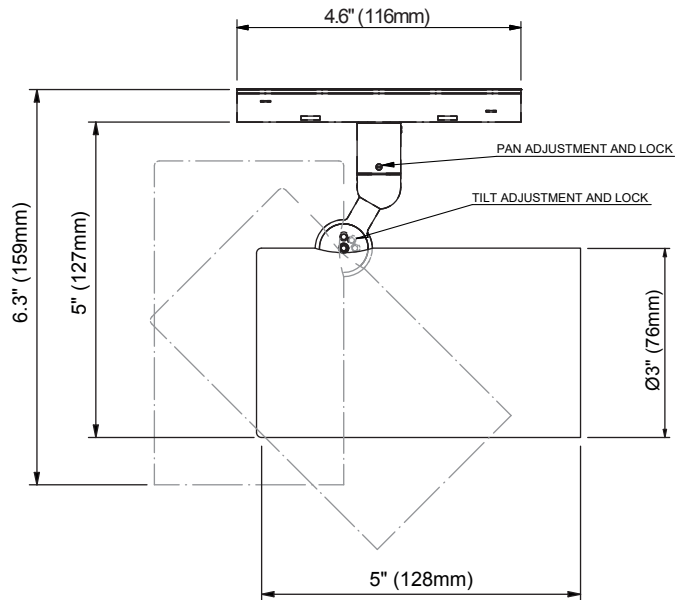

Order Code	ZTA.70.LV Eutrac.light source.beam.finish
------------	---

- Materials: Aluminum
- Mount type: Surface
- Light source: Xicato XOB COB LED
Xicato XTM 19mm LES LED module
LED lifetime: L70, B0, F0 at 50,000hrs
Col consistency: 1x2 SDCM
- Output: See table over page
- Dimming: See table over page
- Finish: Standard offering is RAL 9010 Pure White or Matt Black
Internal lamptube is Matt Black
Bespoke finishes are available
- Supply: 48V DC PSU
- Locking: 2mm Allen key required
- Available tilt: 130°
- Available pan: 363°
- Weight: 1.3lbs (0.6kg)
- Description: ZTA is a truly unconstrained new product range, be that in choice of light source, optic, paint finish, control system or how it's mounted. With a simpler aesthetic, it offers versatility and a product that is truly maintainable, re-manufacturable and ultimately recyclable.
- Beams: See table over page
- Accessories: Can accommodate up to 2 x Ø2.8" (70mm) lens or louver


Very high output, fixed optics, Zoom and WW	High output, fixed optics	Low output, tight beams and Zoom	High output, wall wash								
Xicato XOB 0.57" (14.5mm)	Xicato XOB 0.39" (9.8mm)	Xicato XOB 0.24" (6mm)	0.75" (19mm) XTM								
Dimming Option 0-10V, Wireless (Xicato)	Dimming Option 0-10V, Wireless (Xicato)	Dimming Option 0-10V, Wireless (Xicato)	Dimming Option 0-10V, Wireless (Xicato)								
<table border="1"> <tr> <td>CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf</td> <td>CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf</td> </tr> </table>	CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	<table border="1"> <tr> <td>CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</td> <td>CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</td> </tr> </table>	CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	<table border="1"> <tr> <td>CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td> <td>CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td> </tr> </table>	CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	<table border="1"> <tr> <td>CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf</td> <td>CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf</td> </tr> </table>	CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf	CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf
CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf										
CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf										
CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf										
CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf	CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf										
CCT 2700K, 3000K, 3500K, or 4000K	CCT 2700K, 3000K, 3500K, or 4000K	CCT 2700K, 3000K, 3500K, or 4000K	CCT 2200K, 2700K, 3000K, 3500K, 4000K or 5600K								
Beam Options Narrow (22°) Medium (24.5°) Flood (31.7°) Flood 2 (45.7°) Wide Flood (60.9°) Zoom (22.9°-39.3°) Wall Wash (81.3°-41.4°) <small>Wall Wash output is 2580lm @90CRI, 2310lm @95CRI</small>	Beam Options Narrow (15.1°) Medium (22°) Flood (31.2°) Flood 2 (44.3°) Wide Flood (64.5°) Zoom (16.6°-41.2°)	Beam Options Very Narrow (10.9°) Medium (22°) Flood (35.5°) Flood 2 (49°) Wide Flood (66°)	Beam Options Narrow (22.7°) Medium (27.4°) Flood (37.4°) Wide Flood (43.5°) Wall Wash (89.5° x 55°) <small>*Wall Wash output is 2100lm @90CRI, 1860lm @95CRI</small>								

Wiring

The ZTA.70.LV Eutrac is supplied with a Eutrac Led-Trac adaptor.

A suitable 48V supply should be connected to the track, the fittings on the track are connected in parallel.

The max number of fittings is limited by the power of the PSU.

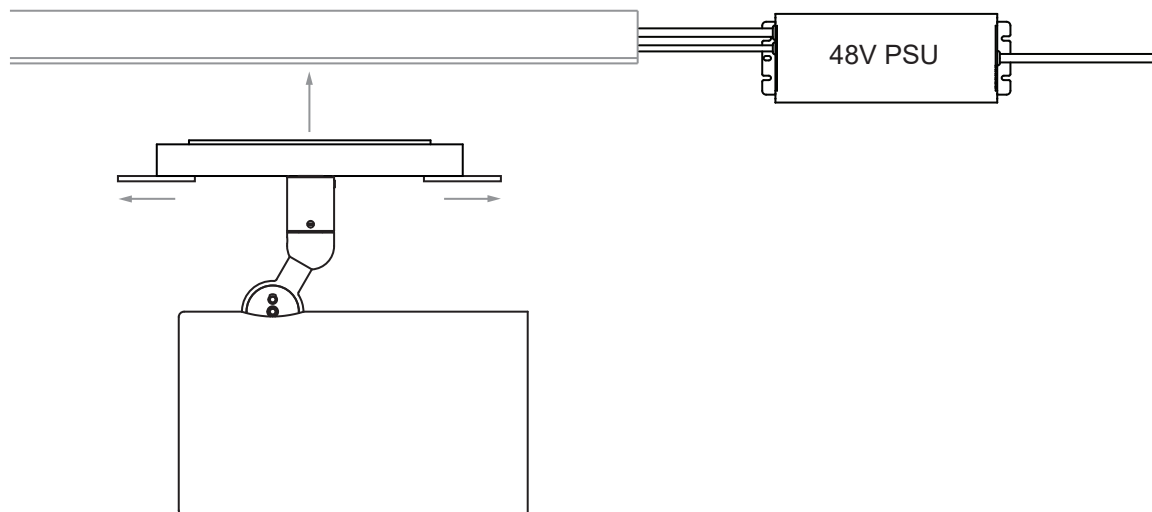


Pull out tabs to release locking grips and insert the adaptor into the track.


Push tabs in to secure in track.

The fitting will sit flush in the track if installed correctly (align the raised edge on the track adaptor with the groove in the track).


Accessories




Clear lens
Frosted lens
Stipple/patterned lens
Filter



Sharp Elliptical
Spread Lens




Diffuse Elliptical
Spread Lens




Honeycomb Louver

ZTA.70 has provision for two accessories. Only one accessory can be used with the following attachments:

ZTA.70 Snoot

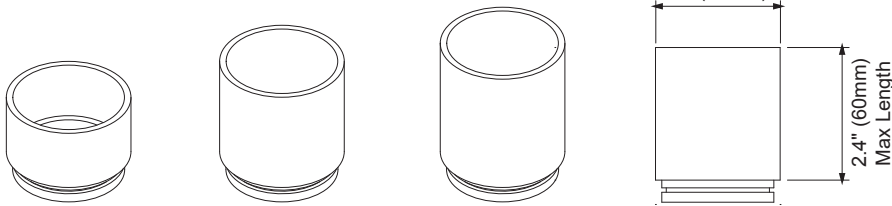

ZTA.50 Slash Cut Snoot

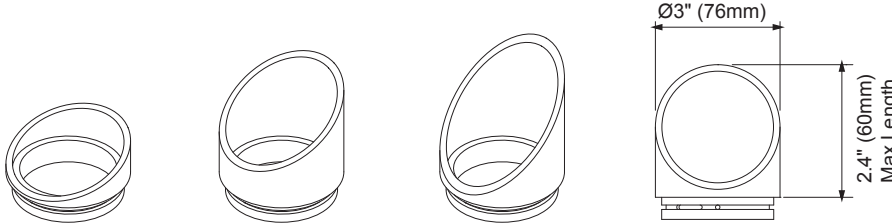

ZTA.50 Barn Doors

