


# ZTA.70.LV Stucchi

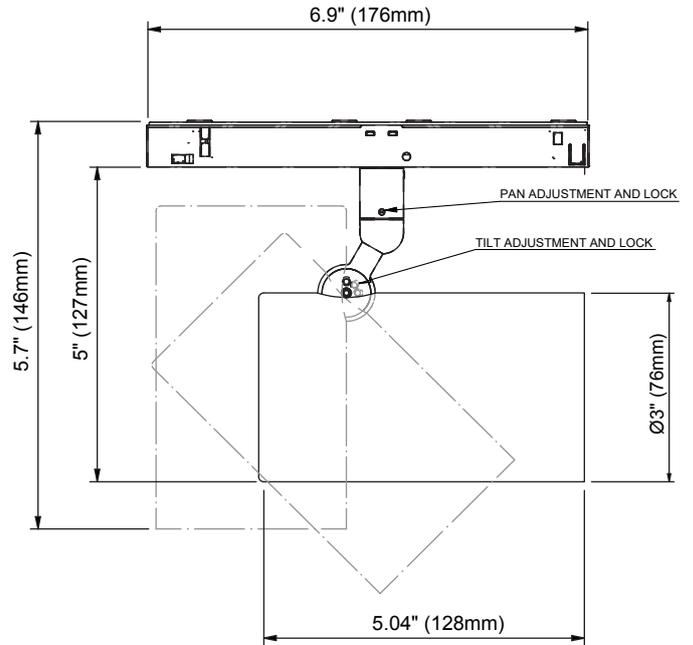

Order Code	ZTA.70.LV Stucchi.light source.beam.finish
------------	--

- Materials: Aluminum
- Mount type: Surface
- Light source: Xicato XOB COB LED  
Xicato XTM 19mm LES LED module  
*LED lifetime: L70, B0, F0 at 50,000hrs*  
*Col consistency: 1x2 SDCM*
- Output: See table over page
- Dimming: See table over page
- Finish: Standard offering is RAL 9010 Pure White or Matt Black  
Internal lamptube is Matt Black  
Bespoke finishes are available
- Supply: 48V DC PSU
- Locking: 2mm Allen key required
- Available tilt: 130°
- Available pan: 363°
- Weight: 1.3lbs (0.6kg)
- Description: ZTA is a truly unconstrained new product range, be that in choice of light source, optic, paint finish, control system or how it's mounted. With a simpler aesthetic, it offers versatility and a product that is truly maintainable, re-manufacturable and ultimately recyclable.
- Beams: See table over page
- Accessories: Can accommodate up to 2 x Ø2.8" (70mm) lens or louver


Very high output, fixed optics, Zoom and WW	High output, fixed optics	Low output, tight beams and Zoom	High output, wall wash								
Xicato XOB 0.57" (14.5mm)	Xicato XOB 0.39" (9.8mm)	Xicato XOB 0.24" (6mm)	0.75" (19mm) XTM								
Dimming Option	Dimming Option	Dimming Option	Dimming Option								
0-10V, DALI, or Wireless (Xicato or Casambi)	0-10V, DALI, or Wireless (Xicato or Casambi)	0-10V, DALI, or Wireless (Xicato or Casambi)	0-10V, DALI, or Wireless (Xicato or Casambi)								
<table border="0"> <tr> <td>CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf</td> <td>CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf</td> </tr> </table>	CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	<table border="0"> <tr> <td>CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</td> <td>CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</td> </tr> </table>	CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	<table border="0"> <tr> <td>CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td> <td>CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td> </tr> </table>	CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	<table border="0"> <tr> <td>CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf</td> <td>CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf</td> </tr> </table>	CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf	CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf
CRI ≥ 90 3066lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf	CRI ≥ 95 2745lm (Initial @ 3000K) 23.7W at 700mA Typ. 33.9Vf										
CRI ≥ 90 1513lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf	CRI ≥ 95 1341lm (Initial @ 3000K) 11.9W at 350mA Typ. 34Vf										
CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf										
CRI ≥ 80 2700lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf	CRI ≥ 95 2140lm (Initial @ 3000K) 19.9W at 700mA Typ. 28.4Vf										
CCT	CCT	CCT	CCT								
2700K, 3000K, 3500K, or 4000K	2700K, 3000K, 3500K, or 4000K	2700K, 3000K, 3500K, or 4000K	2200K, 2700K, 3000K, 3500K, 4000K or 5600K								
Beam Options	Beam Options	Beam Options	Beam Options								
<ul style="list-style-type: none"> <li>Narrow (22°)</li> <li>Medium (24.5°)</li> <li>Flood (31.7°)</li> <li>Flood 2 (45.7°)</li> <li>Wide Flood (60.9°)</li> <li>Zoom (22.9°-39.3°)</li> <li>Wall Wash (81.3°-41.4°)</li> </ul> <small>Wall Wash output is 2580lm @90CRI, 2310lm @95CRI</small>	<ul style="list-style-type: none"> <li>Narrow (15.1°)</li> <li>Medium (22°)</li> <li>Flood (31.2°)</li> <li>Flood 2 (44.3°)</li> <li>Wide Flood (64.5°)</li> <li>Zoom (16.6°-41.2°)</li> </ul>	<ul style="list-style-type: none"> <li>Very Narrow (10.9°)</li> <li>Medium (22°)</li> <li>Flood (35.5°)</li> <li>Flood 2 (49°)</li> <li>Wide Flood (66°)</li> </ul>	<ul style="list-style-type: none"> <li>Narrow (22.7°)</li> <li>Medium (27.4°)</li> <li>Flood (37.4°)</li> <li>Wide Flood (43.5°)</li> <li>Wall Wash (89.5° x 55°)</li> </ul> <small>*Wall Wash output is 2100lm @80CRI, 1860lm @95CRI</small>								

## Wiring


The ZTA.70.LV Stucchi is supplied with a Stucchi Multisystem Evo track adaptor.

A suitable 48V supply should be connected to the track, the fittings on the track are connected in parallel.


The max number of fittings is limited by the power of the PSU.

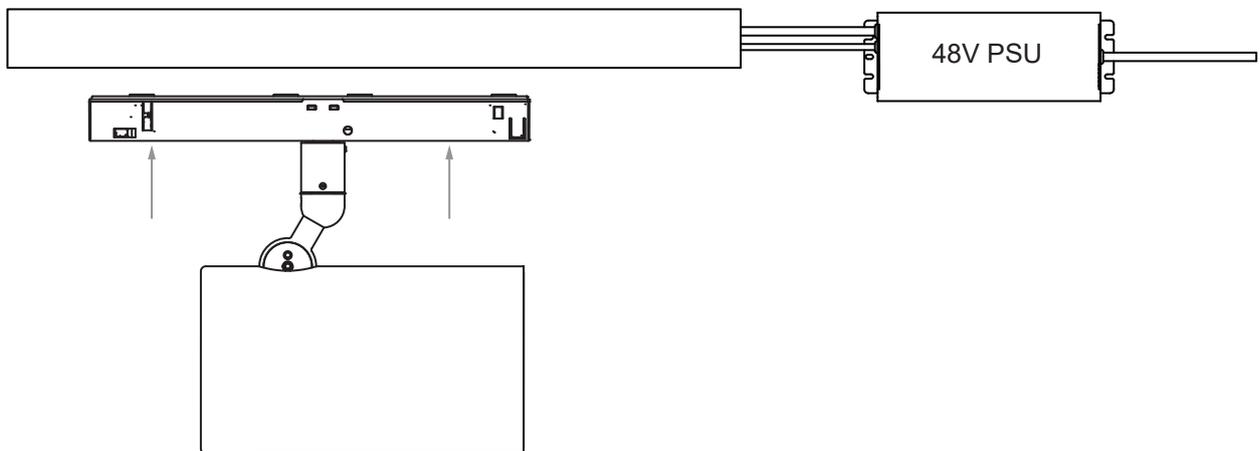


## Accessories

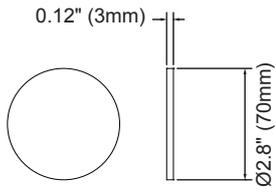


Clear lens  
Frosted lens  
Stipple/patterned lens  
Filter

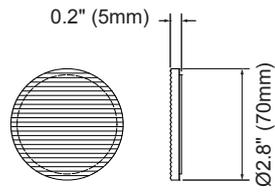

Sharp Elliptical  
Spread Lens

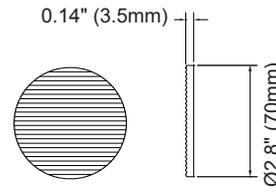


Diffuse Elliptical  
Spread Lens

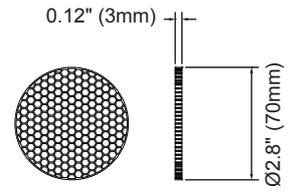


Honeycomb Louver

ZTA.70 has provision for two accessories. Only one accessory can be used with the following attachments:

### ZTA.70 Snoot

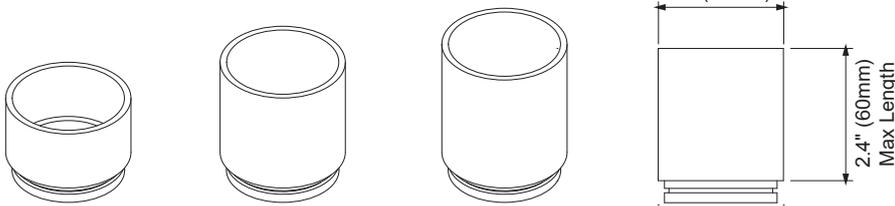

### ZTA.50 Slash Cut Snoot

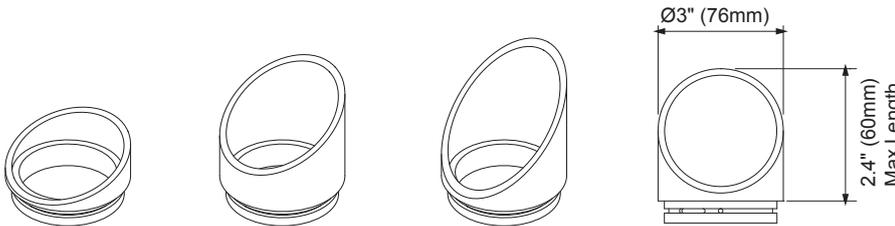

### ZTA.50 Barn Doors

