



**General:** Apache is a family of slim bollards inspired by urban design, suitable for both commercial and residential applications. Apache comes in a straight or in a captivating, curved configuration. The light engine aims down into the carved portion of the shaft, illuminating it from inside out before spreading into the space it is meant to illuminate.

**Fixture Body:** Open pore Anodized and Powder Coated Aluminum.

**Diffuser:** UV Resistant Polycarbonate, Opaline.

**Mounting:** Fixture comes with standard Galvanized Iron, Powder Coated Base. Anchor Bolts available upon request.

**Dimensions/Weight:** 21.7" (3.92 lbs) – 31.5" 8.44 (lbs)

**Driver:** Remote, 120-277V Dimmable 0-10V.

**Wattages:** 7W (21.7") – 9W (31.5")

**Cable:** Fixture comes with 3.28' of power cable.

**Safety features:** Fixture is equipped with Electrostatic discharge protection (4 KV) and Surge Protection (0.5 KV).

**IP rating:** IP65 for protection against dust and moderate water jets from any angle.

**IK rating:** IK 08

**ETL Certification:** ETL, wet location

**Optics:** Fixed with Asymmetric Emission.


**Color temperatures:** 3000K – 4000K.

**CRI:** 80+

**BUG Rating:** BUG B0 U1 G0 – Type III Asymmetrical

**Lumen Maintenance:** L70 projections tested at Tj 65° C and Ta 25°.

**Warranty:** 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

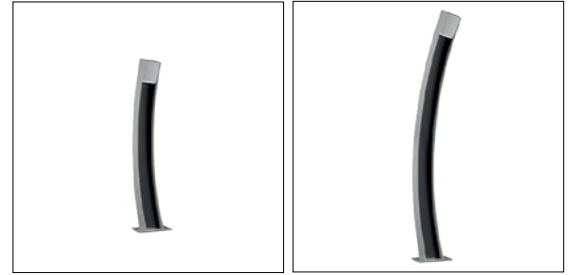

21.7" (7W)

31.5" (9W)


Delivered Lumens*	21.7"	31.5"
GE	463	558

\*Values shown for 3000K

Ordering Information									
Product	Finish (Outer/Inner)	Type	Size	Wattage/Operation	Color Temp	Optic	+	Accessory <sup>1</sup>	Driver (Required) <sup>1</sup>
APA = Apache	CBOBG = Curved Bollard Black Gray (Anthracite) CBOGB = Curved Bollard Gray + Black CBODB = Curved Bollard All Dark Brown CBOSA = Curved Bollard All Sand	AE = Asymmetric Emission	22 = 21.7" 32 = 31.5"	7 CC = 7W / Constant Current (180 mA) 9 CC = 9W / Constant Current (220mA)	30 = 3000K 40 = 4000K	GE = General Illumination		Anchor Bolts E64210	ECO30W-XXX SOLO50W-XXX SOLO100W-XXX

<sup>1</sup> See page 2

## 21.70" 7W 180mA




### DRIVER OPTIONS (pick one)

#### C.C. Power supply options (remote only)

ECO30W-180	SOLO50W-220	SOLO100W-180
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

## 31.5" 9W 220mA



### DRIVER OPTIONS (pick one)

#### C.C. Power supply options (remote only)

ECO30W-180	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

### Accessories



#### E64210

Anchor Bolts