

# Rubber 2D Mini



**General:** Rubber is a broad family of flexible lighting fixtures created to resolve even the most challenging architectural details and applications (columns, curved walls), both indoor and outdoor. Rubber is available in multiple solutions: from a 3D version with a diffused output that bends in every direction, to 2D Mini (only 0.2" wide) options that bend sideways, to get to the unique 3D Optic.

3D Optic has dedicated optics every inch which make this 360° bendable product a real lighting machine, unique in its category and with an unprecedented attention to its design and look.

**Fixture Body:** Polyurethane resin blended into a PVC flexible channel. Rubber 2D Mini is Side Bend only (Min. Bending Radius 5.9").

**Mounting/Casing:** Straight Aluminum channels and mounting clips.

**Drive-over:** Walk-Over only.

**Dimensions/Weight:** 39.3" (0.61 lbs) – 196.9" (3.01 lbs) – 393.8" (8.49 lbs)

**Driver:** Remote, 24V DC Dimmable 0-10V or Non-Dim.

**Wattages:** 1.8 W/ft. Individual fixture wattage: 6W (39.3") – 30W (196.9") – 60W (393.8")

**Cable:** Fixture comes with 0.82' of cable (Power cable required, ordered separately).

**IP rating:** IP67 for temporary flooding up to 3.28' depth for up to a maximum of 30 mins.

**IK rating:** IK 05

**ETL Certification:** ETL, wet location



**Optics:** Fixed, diffused.

**Color temperatures:** 2200K – 2700K – 3000K – 3500K – 4000K.

**CRI:** 80+

**Lumen Maintenance:** L70 projections tested at Tj 65° C and Ta 25°.

**Warranty:** 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

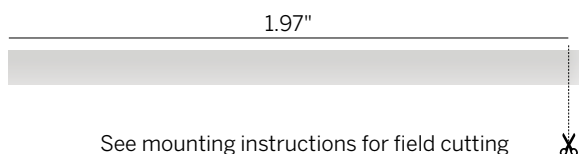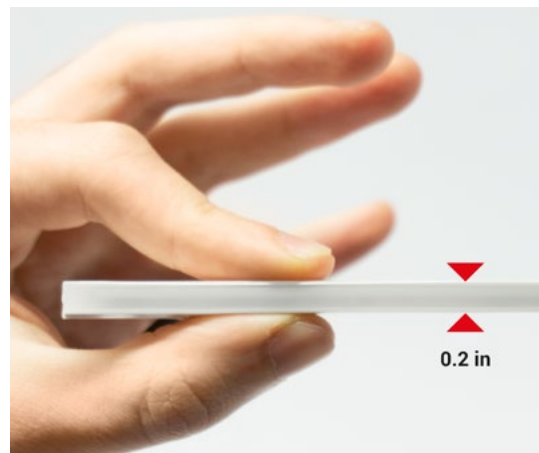


Delivered Lumens*	3.9"	197"	394"	lm/ft
GE	140	700	1400	41

\*Values shown for 3000K

Ordering Information							(Required) <sup>3</sup>			
Product	Trim/Finish	Type	Length	Wattage/Operation	Color Temp	Optic	+	Profile	Cable	Driver
RUB = Rubber	WH = White Finish	2DM - 2D Mini	39 = 39.3" 197 = 196.9" 394 = 393.8"	1.8 CV = 1.8W/ft / Remote Constant Voltage 24V DC	22 = 2200K 27 = 2700K 30 = 3000K 35 = 3500K 40 = 4000K	GE = General Illumination		E82846 E82847	E99688 E99689	OT96-D010 OT96-JBX LUT96-L3D0

<sup>3</sup> See page 2

1.8W/ft 24V DC

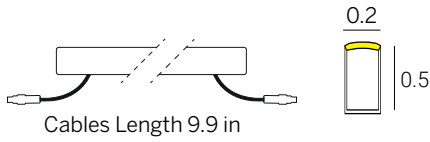

### DRIVER OPTIONS (pick one)

#### C.V. Power supply options (remote only)

**OT96-D010**

Dry location 96W 24V  
0-10V 10% dimmable


**OT96-JBX**

Wet location 96W 24V  
Non-dim

**LUT96-L3D0**

Dry location 96W 24V  
Lutron EcoSystem  
0.1% dimmable


### Profile



**E82846**

Linear profile  
Length 39.4 in

Anod. Al.



**E82847**

Clip  
Length 2 in

Anod. Al.



**E99538**

Pair of end caps  
and silicone tube

### Cables



**E99688**

female connector  
78.7 in

**E99689**

male connector  
78.7 in