

Rubber 3D RGBW



General: Rubber is a broad family of flexible lighting fixtures created to resolve even the most challenging architectural details and applications (columns, curved walls), both indoor and outdoor. Rubber is available in multiple solutions: from a 3D version with a diffused output that bends in every direction, to 2D Mini (only 0.2" wide) options that bend sideways, to get to the unique 3D Optic.

3D Optic has dedicated optics every inch which make this 360° bendable product a real lighting machine, unique in its category and with an unprecedented attention to its design and look.

Fixture Body: Polyurethane resin blended into a PVC flexible channel. Rubber 3D RGBW bends 360° (Min. Bending Radius 9.9").

Mounting/Casing: Multiple mounting solutions available: straight PVC or Aluminum channels and mounting clips with or without wireway; articulated channel to follow any shape the product is bent to.

Drive-over: Walk-Over only.

Dimensions/Weight: 39.5" (0.61 lbs) – 197" (3.01 lbs)

Driver: Remote, 24V DC DMX dimmable.

Wattages: 4.6 W/ft. Individual fixture wattage: 15W (39.5") – 75W (197")

Cable: Fixture comes with 0.82' of cable (Power cable required, ordered separately).

IP rating: IP67 for temporary flooding up to 3.28' depth for up to a maximum of 30 mins.

IK rating: IK 07

ETL Certification: ETL, wet location

Optics: Fixed, diffused.

Color temperatures: RGBW (White 3000K).


CRI: 90

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.



2.46"



Nominal Lumens RGBW	39.5"	197"
Red	96	480
Green	316	1580
Blue	71	355
White 3K	361	1805

Ordering Information							(Required) ¹			
RUB	WH	3D		5 - CVDMMX	R3	GE				EL96-DMX
Product	Trim/Finish	Type	Length	Wattage/Operation	Color Temp	Optic	+	Profile	Cable	Driver
RUB = Rubber	WH = White Finish	3D = 3D	39 = 39.5" 197 = 197"	5 CVDMMX = 4.6W/ft / Remote Constant Voltage 24V DC	R3 = RGBW 3K	GE = General Illumination		99549 C-K100007 83034 C-K100009 C-F400001 C-F400002 C-F400003 C-F400004 C-K100011 99539 99521	E-W200005 E-W200006	EL96-DMX

¹ See page 2


4.6/ftW 24V DC

DRIVER


CVDMX Power supply options (remote only)

EL96-DMX

Dry location 96W 24V
RGBW Sequencer, DMX
dimmable

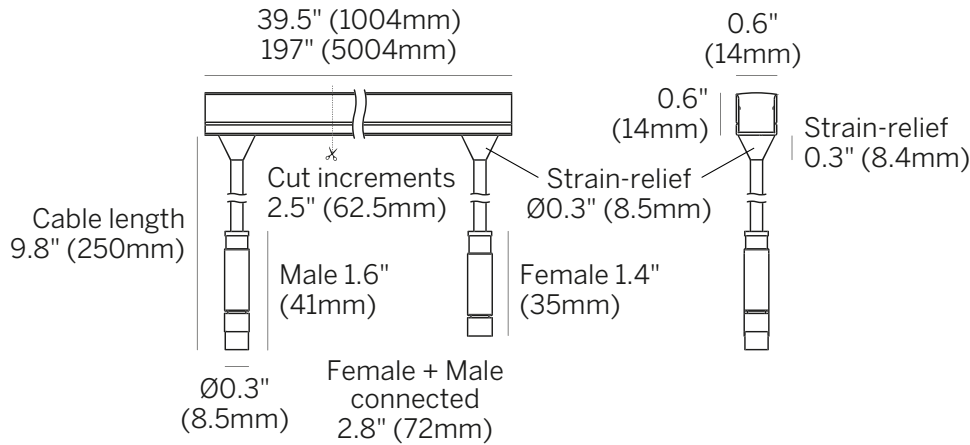

Profile

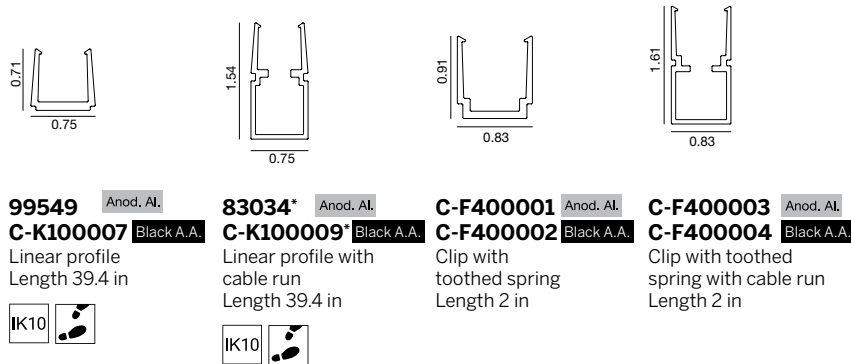

Cables



E-W200005

male connector
78.7 in

E-W200006


female connector
78.7 in



C-K100011

Flexible Profile 39.64 x
0.51 x 0.63 in


Anod. Al.



83351

Spike with bracket
(requires linear profile
or clip ordered
separately)

PVC




83352

Tilting bracket
(requires linear profile
or clip ordered
separately)



99539

Pair of end caps
and silicone tube



*99521

Polystyrene Concrete-pour
preparation kit for 83034
/ C-K100009 profiles only
(not to be used on curved
runs) 1.6"H x 0.9"W x
39.8"L