



General: Rubber is a broad family of flexible lighting fixtures created to resolve even the most challenging architectural details and applications (columns, curved walls), both indoor and outdoor. Rubber is available in multiple solutions: from a 3D version with a diffused output that bends in every direction, to 2D and 2D Mini (only 0.2" wide) options that bend sideways, to get to the unique 3D Optic.

3D Optic has dedicated optics every inch which make this 360° bendable product a real lighting machine, unique in its category and with an unprecedented attention to its design and look.

Fixture Body: Polyurethane resin blended into a PVC flexible channel. Rubber 3D RGBW bends 360° (Min. Bending Radius 9.9").

Mounting/Casing: Multiple mounting solutions available: straight PVC or Aluminum channels and mounting clips with or without wireway; articulated channel to follow any shape the product is bent to.

Drive-over: Walk-Over only.

Dimensions/Weight: 39.3" (0.61 lbs) – 196.9" (3.01 lbs)

Driver: Remote, 24V DC DMX dimmable.

Wattages: 5 W/ft. Individual fixture wattage: 16.5W (39.3") – 82.5W (196.9")

Cable: Fixture comes with 0.82' of cable (Power cable required, ordered separately).

IP rating: IP67 for temporary flooding up to 3.28' depth for up to a maximum of 30 mins.

IK rating: IK 07

ETL Certification: ETL, wet location


Optics: Fixed, diffused.

Color temperatures: RGBW (White 3000K).

CRI: 80+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

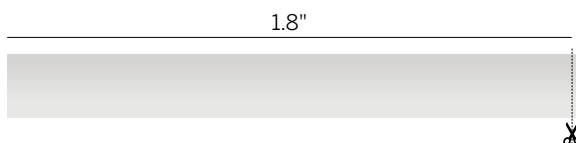


Nominal Lumens RGBW	39.3"	196.9"
Red	96	480
Green	316	1580
Blue	71	355
White 3K	361	1805

Ordering Information							(Required) ¹			
Product	Trim/Finish	Type	Length	Wattage/Operation	Color Temp	Optic	+	Profile	Cable	Driver
RUB = Rubber	WH = White Finish	3D = 3D	39 = 39.3" 197 = 196.9"	5 CVDMMX = 5W/ft / Remote Constant Voltage 24V DC	R3 = RGBW 3K	GE = General Illumination		E99549 E83034 E99536 E99537 E99541	E99692 E99693	EL96-DMX

¹ See page 2

5/ftW 24V DC

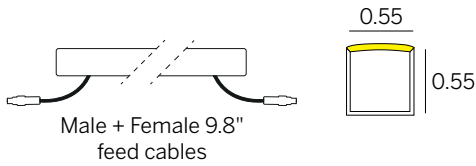

DRIVER

CVDMX Power supply options (remote only)

EL96-DMX


Dry location 96W 24V
RGBW Sequencer, DMX
dimnable

Profile


Cables




E99549
Linear profile
Length 39.4 in




E83034
Linear profile with
cable run
Length 39.4 in



E99536
Clip with
toothed spring
Length 2 in



E99537
Clip with toothed
spring with cable run
Length 2 in



E99541
Flexible profile
41.1 x 0.75 x 0.64 in.
(Only suitable with
LED strip facing up.
Not suitable for
direct-view or concrete
applications.)



E99692
Female connector
feed cable 78.7 in

E99693
Male connector
feed cable 78.7 in



E99539
Pair of end caps
and silicone tube



E99521
Polystyrene Concrete-pour
preparation kit for E83034 profile
only (not to be used on curved runs)
1.6"H x 0.9"W x 39.8"L