

Lighting is about creating an environment that uses light as the main medium of expression. It means having one's work blend seamlessly with the architecture, often at the risk of not being seen. It's about giving definition to a space.





Project Lighting

A combination of standard and customizable products lending themselves to large projects that require multiple versions of the same style luminaires to accomplish the desired design intent. ALM is singularly focused on budget conscious opportunities that can take advantage of a flexible design approach and prime manufacturing to deliver value to the project.

inter•lux






The Standard Product Range

The ALM Standards range is characterized by clean lines, architectural shapes and the latest, most efficient LED lighting sources and controls. By maintaining a no-frills approach to the standard products, ALM leaves a lot of room for the designer to tailor to their requirements and budget.

Assemblies

By combining Standards into Assemblies, new and significantly larger scale products can be configured that will extend the reach of the product range, as well as deliver continuity to the overall aesthetic and performance of the design.

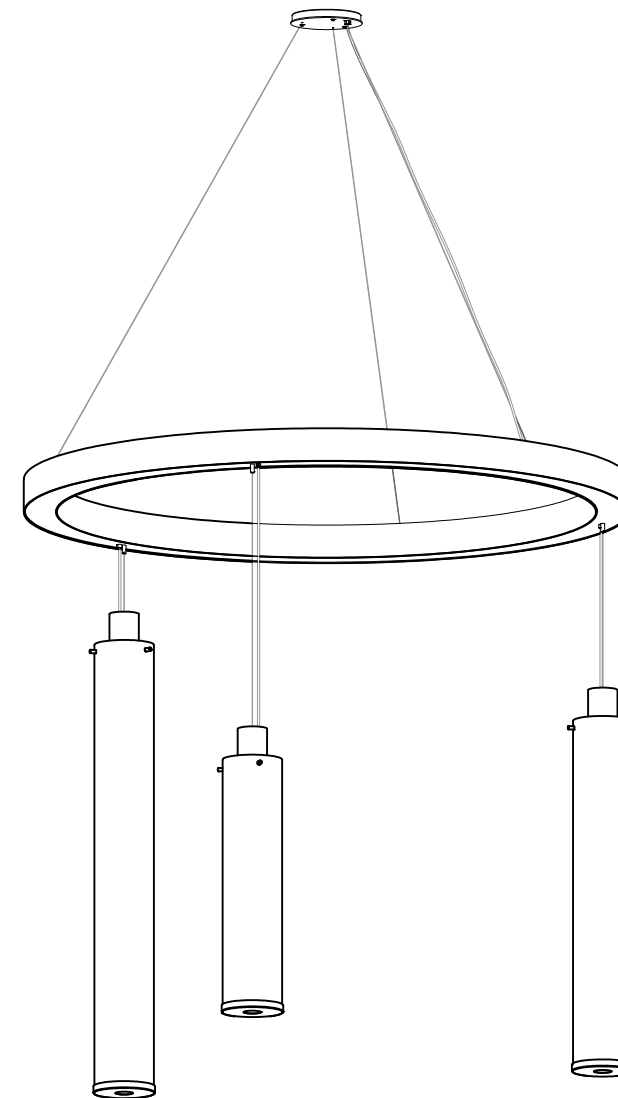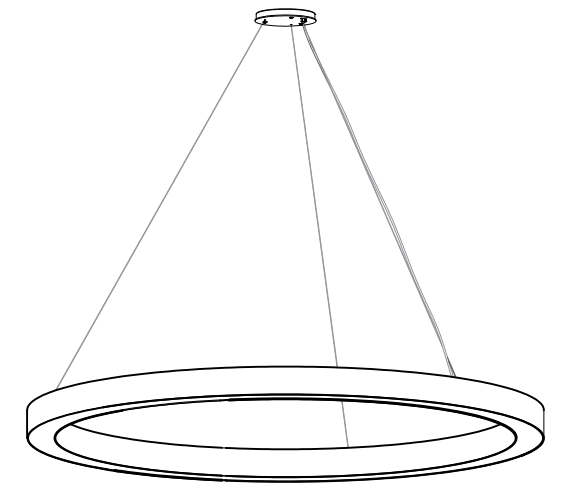


Modified

Families of luminaires in multiple sizes provide a wide selection of lighting performance characteristics that will accomplish the aesthetic as well as the illumination tasks. Often a modification is required to augment an architectural detail or to illuminate a feature. In that case, ALM is fully capable of meeting the design requirements.





Modifications may include size, shape, finish and performance variants. ALM may be asked to take an indoor product outdoor, change the mounting from pendant to wall mount or add architectural details to an existing product that totally changes the aesthetic.

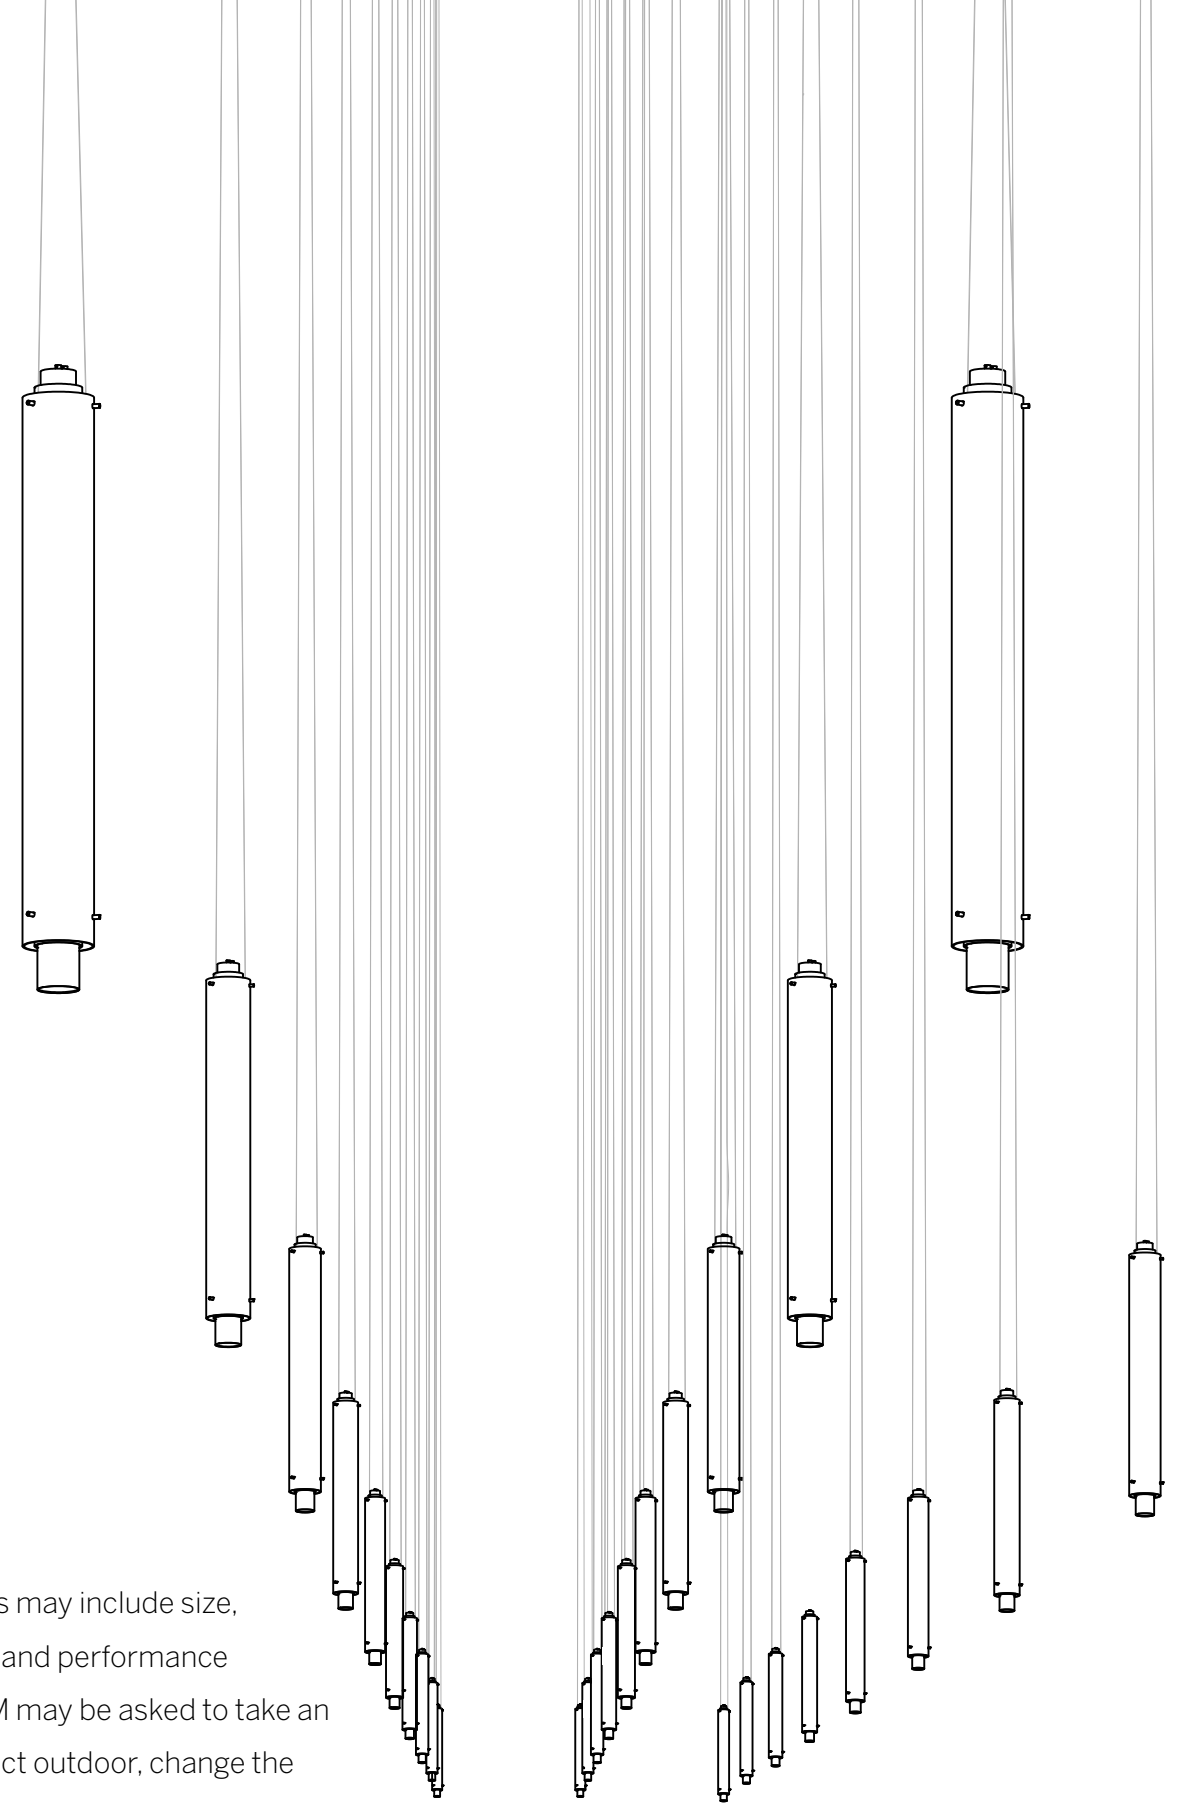

Custom



Often a truly unique product is required to accommodate differing scale spaces, and lighting applications while maintaining a common appearance and language.

ALM will produce custom lighting products to fit most commercial projects while maintaining a budget.

- Larger or smaller scale
- Outdoor versions of indoor products
- Adding separately controlled uplight or downlight components
- Designed hanging structures for single or multiple products
- Color changing or dynamic white light
- Finish or material changes to match or contrast architectural elements
- Standard, modified and or complete custom





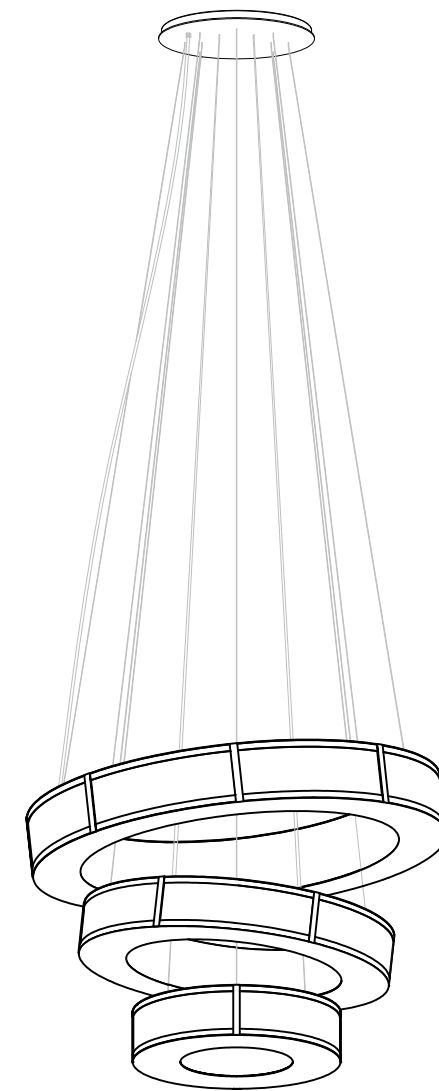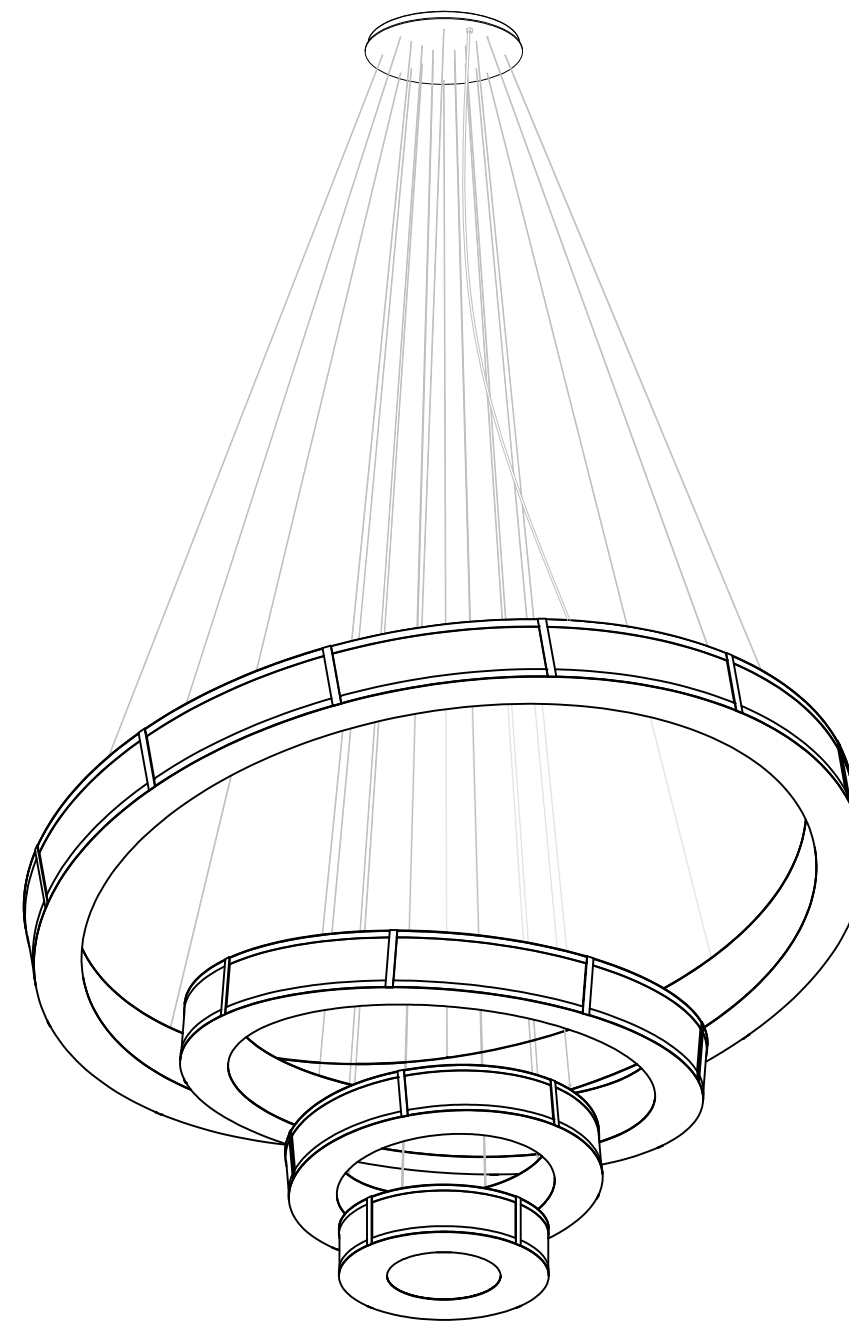



Technology

ALM utilizes the same state-of-the-art and fully supported LED solutions as Whitegoods and other Inter-lux products in order to maintain a consistency of performance and appearance throughout the project. Regardless of which product in the ALM and Whitegoods lines are utilized, the same high-standards

are applied, bringing you consistency of CRI, lumen output, dimming characteristics and performance data. Look for the Inter-lux CV or CC LED board data on all linear products, as well as the Cree LED reference to ensure that you are adequately matching your LED products.

Linear LED


- Replaceable boards for sustainability.
- Available in any continuous length to accommodate exacting installations.
- Multiple wattages and lumen output for maximum flexibility within any application.
- 82 or 90 CRI.
- 3 step MacAdam.
- Four standard color temperatures from 2700K-4000K.
- Compatible with all common dimmer and control standards.
- High efficiency design delivers more lumens per watt.
- Consistent throughout ALM products for color and performance consistency.
- 5-year warranty.



For discrete LED engine requirements, ALM standardizes on the latest state-of-the-art devices, and maintains consistency throughout the range, as well as matching with other Inter-lux Brand offerings.

Contents

ceiling



Clearline Ceiling 41



Ciro SQ 31



Ciro RD 33



Fuse 47



Puck 55



Stick M 71

pendant



Arc 23



Arc UD 25



Aura 29



Ciro SQ 31



Ciro RD 33



Clearline Pendant 39



Frame 45



Fuse 47

pendant



Gran Fuse 49



Plume 51



Puck 53



Ring D 55



Ring UD 57



Ring U 59



Step 63



Step RC 65



Stick 67



Stick M 69



Wing AR 75

surface



Aura 29



Frame 45



Step 65



Step RC 65

Contents

surface



Wing AR 75

wall



City Indoor 35




Clearline Wall 43



Sigma 61



Wedge 71



Wing 73

outdoor



City Outdoor 37



Sigma 61






Wedge 71






Arc

Arc is a completely customizable channel designed to provide direct or indirect lighting and a means to suspend luminaires. Open arcs, ellipses and compound curves can be realized to exacting dimensions.

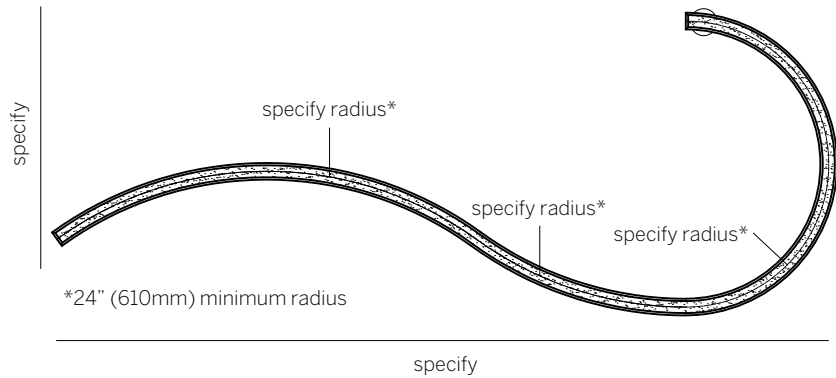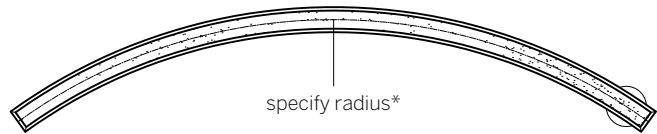

*24" (610mm) minimum radius

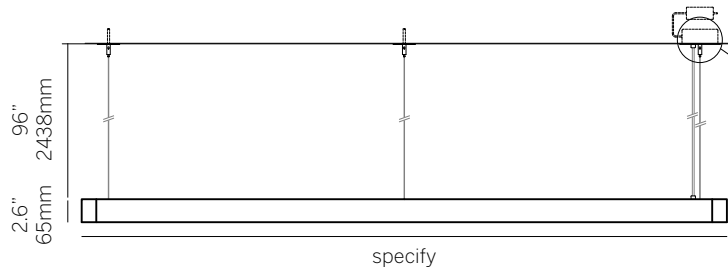


Notes

- ¹Separately specify any downlighting elements
- ²Nominal lumens
- ³For no direct or indirect light specify 00
- ⁴82 CRI standard / 90 CRI available
- ⁵Canopy finish matches housing
- ⁶96" clear insulated cable standard



Model 1694 ¹	1694
Type	P
P	Pendant
Size	
Specify radius	_____
Specify length	_____
Wattage ²	
Specify direct or indirect light ³	_____
Direct	_____
LD	3 W/ft (133lm/W)
MD	6 W/ft (124lm/W)
HD	10 W/ft (114lm/W)
Indirect	_____
LI	3 W/ft (133lm/W)
MI	6 W/ft (124lm/W)
HI	10 W/ft (114lm/W)
Color Temp ⁴	
827	2700
830	3000
835	3500
840	4000
RGB	RGB
Voltage	
U	120/277
I	120VAC only
Control (Remote 24V)	
S	Non-dim
D010	0-10V 10%
DFPN	Lutron Forward Phase 1% 120VAC
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem
DMX	DMX dimming
Diffuser	
SW	Satin opal acrylic (bottom)
SA	Satin clear acrylic (top)
Finish ⁵	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted White - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color
Options	
CC	Clear insulated cable (standard) ⁶
WC	White cable
BC	Black cable






For up to date technical information, refer to inter-lux.com/alm




Arc UD

Arc UD is a completely customizable channel designed to provide direct / indirect lighting and a means to suspend luminaires. Open arcs, ellipses and compound curves can be realized to exacting dimensions.

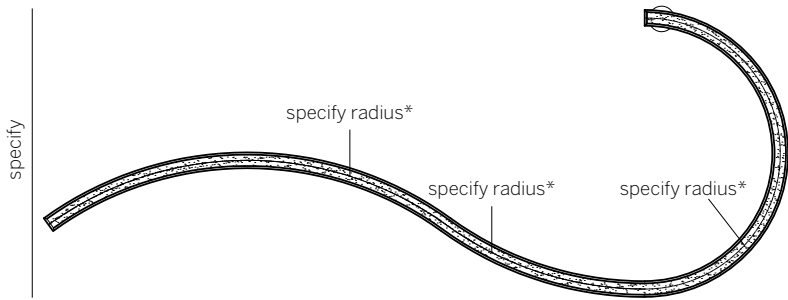


*24" (610mm) minimum

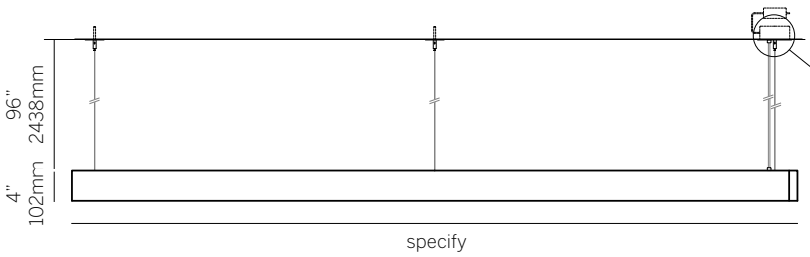


Notes

- ¹Separately specify any downlighting elements
- ²Nominal lumens
- ³For no direct or indirect light specify 00
- ⁴82 CRI standard / 90 CRI available
- ⁵Canopy finish matches housing
- ⁶96" clear insulated cable standard

Model 1695¹	1695
Type	
P Pendant	P
Size	
Specify radius	_____
Specify length	_____
Wattage²	
Specify direct and/or indirect light ³	
Direct	_____
LD 3 W/ft (133lm/W)	
MD 6 W/ft (124lm/W)	
HD 10 W/ft (114lm/W)	
Indirect	_____
LI 3 W/ft (133lm/W)	
MI 6 W/ft (124lm/W)	
HI 10 W/ft (114lm/W)	
Color Temp⁴	
827 2700	
830 3000	
835 3500	
840 4000	
RGB RGB	
Voltage	_____
U 120/277	
1 120VAC only	
Control (Remote 24V)	_____
S Non-dim	
D010 0-10V 10%	
DFPN Lutron Forward Phase 1% 120VAC	
L3DAE Lutron Hi-lume 1% EcoSystem	
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem	
DMX DMX dimming	
Diffuser	
SW Satin opal acrylic (bottom)	SW
SA Satin clear acrylic (top)	SA
Finish⁵	_____
19 Painted anodized aluminum - RAL 9006 matte	
21 Painted White - RAL 9010 matte	
26 Painted black - RAL 9005 matte	
22 Painted custom color	
Options	
CC Clear insulated cable (standard) ⁶	_____
WC White cable	
BC Black cable	




For up to date technical information, refer to inter-lux.com/alm

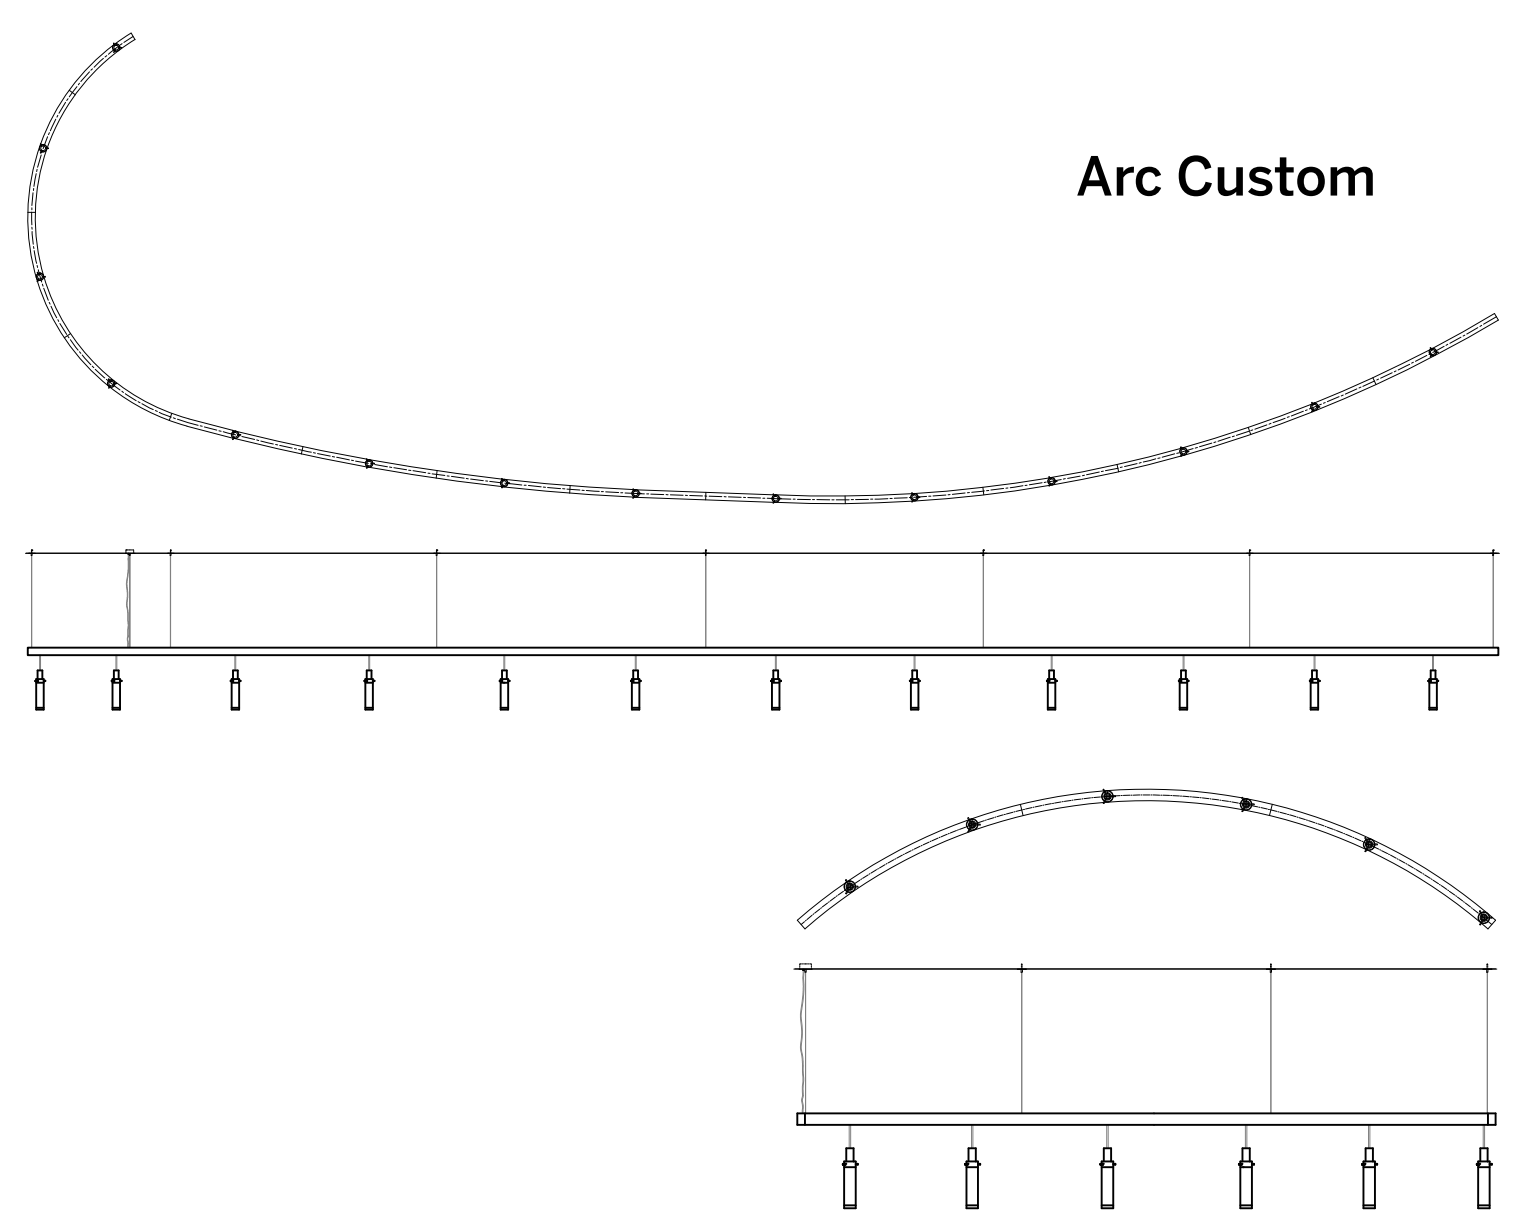




Aura

Suspended and surface mostly direct luminaire with 10% uplight in multiple sizes and lumen packages to illuminate all size spaces.

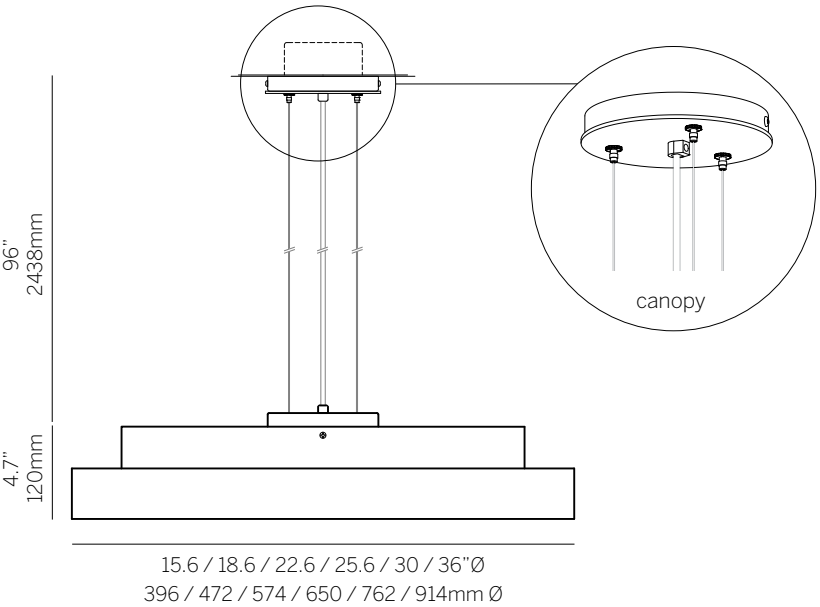

Pendant

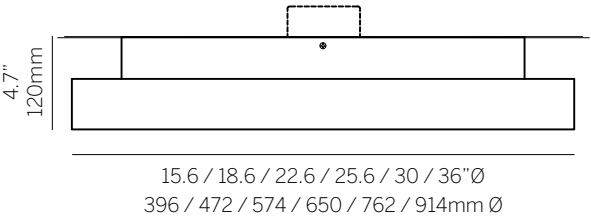

Surface


- Notes**
- ¹Nominal lumens
 - ²82 CRI standard / 90 CRI available
 - ³Remote 15", 18", Integral 22", 25", 30", 36"
 - ⁴Canopy finish matches housing
 - ⁵96" clear insulated cable standard

Model 1520		1520
Type		
P	Pendant	
S	Surface	
Size		
15	15.6" Ø	
18	18.6" Ø	
22	22.6" Ø	
25	25.6" Ø	
30	30" Ø	
36	36" Ø	
Custom		
Wattage¹		
15"		
L	9W (1200lm)	
M	18W (2229lm)	
18"		
L	11W (1467lm)	
M	22W (2724lm)	
22"		
L	15W (2000lm)	
M	30W (3715lm)	
25"		
L	22W (2933lm)	
M	44W (5449lm)	
30"		
L	33W (4400lm)	
M	66W (8173lm)	
36"		
L	56W (7467lm)	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (24V)³		
S	Non-dim	
D010	0-10V 10%	
DVPN	Lutron Forward Phase 1% 120VAC	
L3DAE	Lutron Hi-lume 1% EcoSystem	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote only)	
Diffuser		
SW	Satin opal acrylic	SW
Finish⁴		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁵	
WC	White cable	
BC	Black cable	



Ciro SQ

Ciro SQ is a simple, economical solution to provide general illumination. Use Ciro SQ as a suspended or ceiling luminaire.

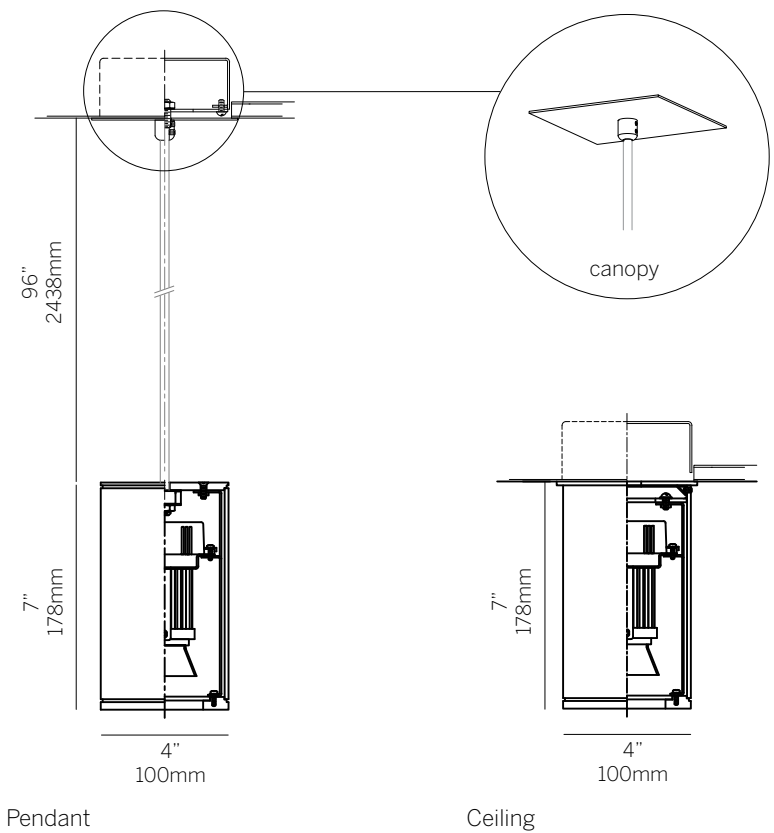

Notes
¹Nominal lumens
²82 CRI standard / 90 CRI available
³Canopy finish matches housing
⁴96" clear insulated cable standard

Model 1280		1280
Type		
P	Pendant	
C	Ceiling	
Size		
7	7"	
Custom		
Wattage¹		
L	8.4W (131lm) @ 500mA	
M	12.6W (1710lm) @ 700mA	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (Constant Current)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
ECO30W	EldoLED 0-10V 1% (Remote)	
DFPN	Lutron Forward Phase 1% 120VAC (Remote)	
PEQ1	Lutron Hi-lume 1% EcoSystem (Remote)	
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
SA	Satin clear acrylic	SA
Finish³		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
26	Painted black - RAL 9005 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	




For up to date technical information, refer to inter-lux.com/alm



Ciro RD

Ciro RD is a simple, economical solution to provide general illumination. Use Ciro RD as a suspended or ceiling luminaire.

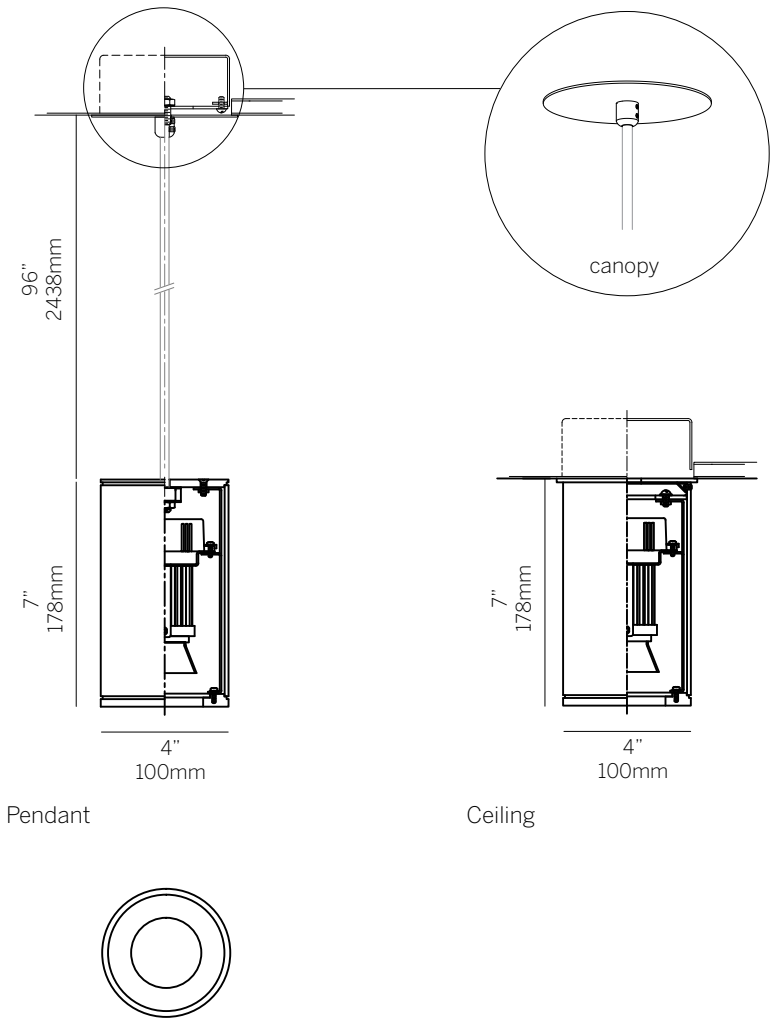

Pendant

Ceiling

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96 inch clear insulated cable standard





For up to date technical information, refer to inter-lux.com/alm

Model 1282		1282
Type		
P	Pendant	
C	Ceiling	
Size		
7	7"	
Custom		
Wattage¹		
L	8.4W (131lm) @ 500mA	
M	12.6W (1710lm) @ 700mA	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
I	120VAC only	
Control (Constant Current)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
ECO30W	EldoLED 0-10V 1% (Remote)	
DFPN	Lutron Forward Phase 1% 120VAC (Remote)	
PEQ1	Lutron Hi-lume 1% EcoSystem (Remote)	
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
SA	Satin clear acrylic	SA
Finish³		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
26	Painted black - RAL 9005 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	



City Indoor

The simple clean lines of the fixture are an ideal solution for interior architectural surfaces. Wall mounted, vertically or horizontally oriented with indirect LED lighting.

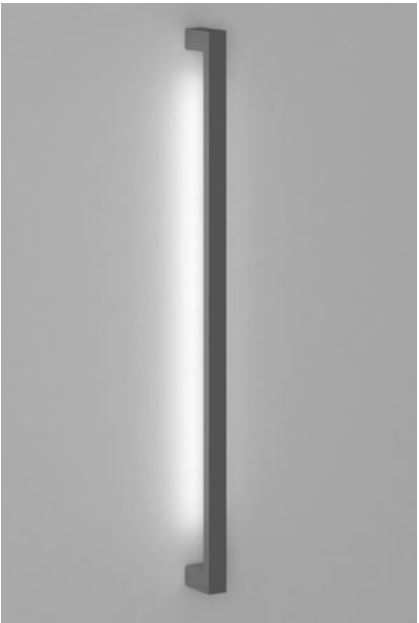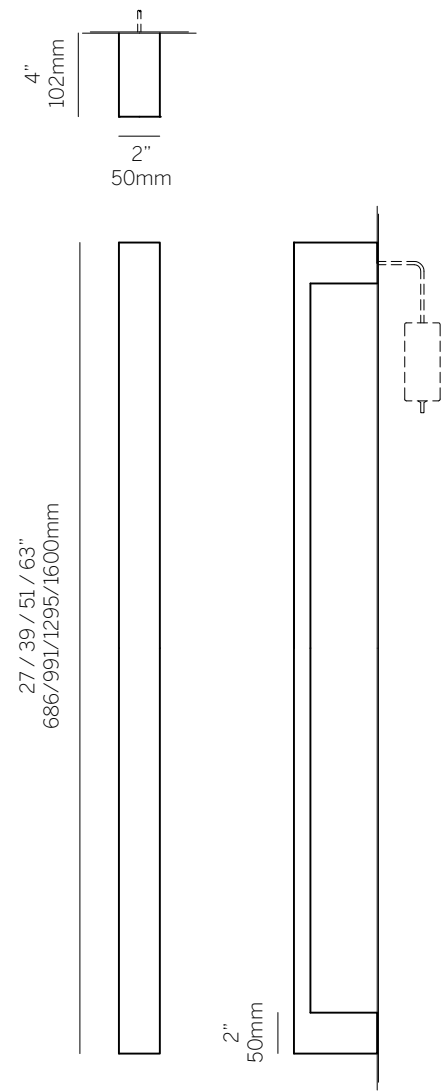

Notes
¹Nominal lumens
²82 CRI standard / 90 CRI available



For up to date technical information, refer to inter-lux.com/alm

Model 1825		1825
Type		W
W	Wall	
Size		_____
27	27"	
39	39"	
51	51"	
63	63"	
Custom		
Wattage¹		_____
27"		
L	6W (733lm)	
M	11W (1362lm)	
H	19W (2152lm)	
39"		
L	9W (1133lm)	
M	17W (2105lm)	
H	29W (3326lm)	
51"		
L	12W (1533lm)	
M	23W (2848lm)	
H	39W (4500lm)	
63"		
L	15W (1933lm)	
M	29W (3591lm)	
H	49W (5674lm)	
Color Temp²		_____
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		_____
U	120/277	
1	120VAC only	
Control (Remote 24V)		_____
S	Non-dim	
D010	0-10V 10%	
DFPN	Lutron Forward Phase 1% 120VAC	
L3DAE	Lutron Hi-lume 1% EcoSystem	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem	
Diffuser		SA
SA	Satin clear acrylic	
Finish		_____
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
26	Painted black - RAL 9005 matte	
22	Painted custom color	



City Outdoor

The simple clean lines of the fixture are an ideal solution for any style architecture. Wall mounted, vertically or horizontally oriented, this outdoor rated luminaire is perfect for an accent or entrance application.

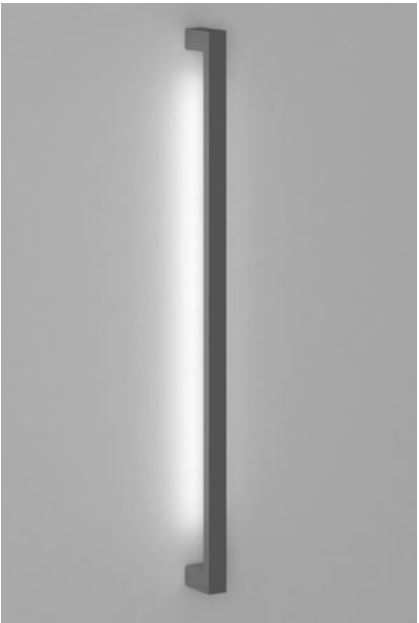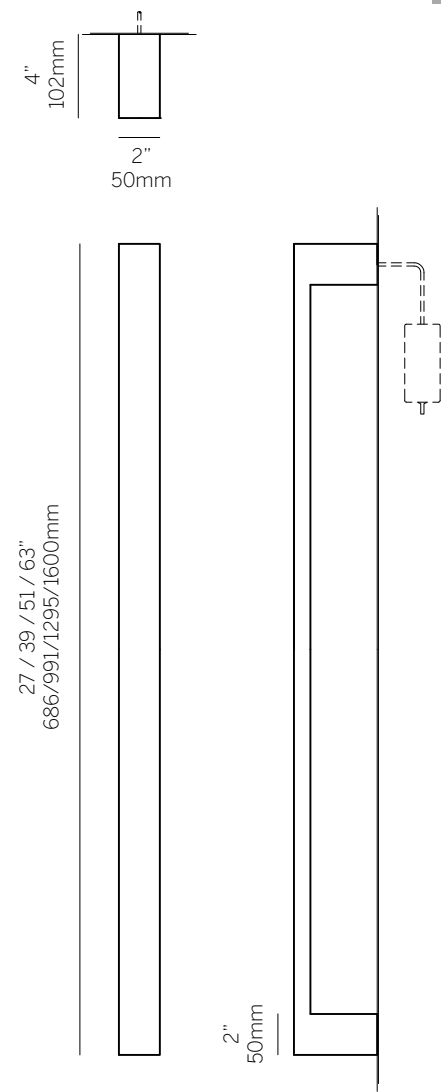

Notes

- ¹Suitable for wet location
- ²Nominal lumens
- ³82 CRI standard / 90 CRI available



For up to date technical information, refer to inter-lux.com/alm

Model 1825WL ¹		1825WL
Type		W
W	Wall	
Size		
27"	27"	
39"	39"	
51"	51"	
63"	63"	
Custom		
Wattage²		
27"		
L	10W (750lm)	
39"		
L	14W (1125lm)	
51"		
L	19W (1500lm)	
63"		
L	24W (1875lm)	
Color Temp³		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
I	120VAC only	
Control (Remote 24V)		
S	Non-dim	
D010	0-10V 10%	
DFPN	Lutron Forward Phase 1% 120VAC	
L3DAE	Lutron Hi-lume 1% EcoSystem	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem	
Diffuser		SA
SA	Satin clear acrylic	
Finish		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
26	Painted black - RAL 9005 matte	
22	Painted custom color	




Clearline Pendant


The Clearline pendant is designed for direct and indirect illumination in offices or reception desks. Accent downlights are provided with independent control circuit to accent surfaces below.

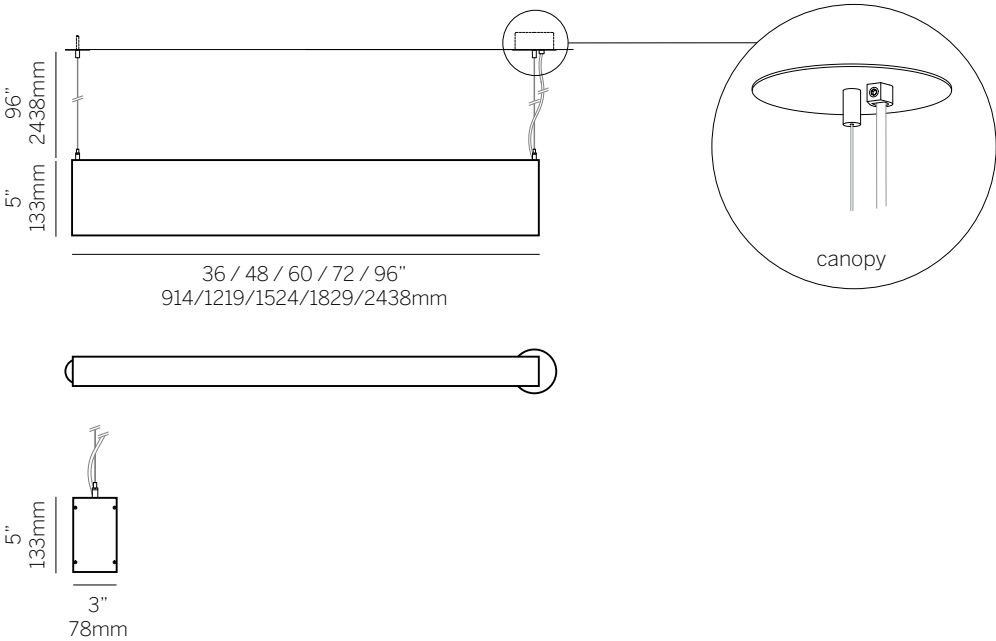

Accent



Indirect



Direct

Model CL2

Type

P Pendant

Size

36 36"
48 48"
60 60"
72 72"
96 96"
Custom

Wattage¹

direct²

36"
LD 9W (1200lm)
MD 18W (2229lm)
HD 30W (3522lm)

48"

LD 12W (1600lm)
MD 24W (2972lm)
HD 40W (4696lm)

60"

LD 15W (2000lm)
MD 30W (3715lm)
HD 50W (5870lm)

72"

LD 18W (2400lm)
MD 36W (4458lm)
HD 60W (7044lm)

96"

LD 24W (3200lm)
MD 48W (5944lm)
HD 80W (9392lm)

CL2

P

indirect²

LI 9W (1200lm)
MI 18W (2229lm)
HI 30W (3522lm)

LI

12W (1600lm)
MI 24W (2972lm)
HI 40W (4696lm)

LI

15W (2000lm)
MI 30W (3715lm)
HI 50W (5870lm)

LI

18W (2400lm)
MI 36W (4458lm)
HI 60W (7044lm)

LI

24W (3200lm)
MI 48W (5944lm)
HI 80W (9392lm)

Color Temp³

827 2700
830 3000
835 3500
840 4000

Voltage

U 120/277
1 120VAC only

Control (24V)

S Non-dim (Integral)
D010 0-10V 10% (Integral)
DFPN Lutron Forward Phase 1%
120VAC (Integral)
L3DAE Lutron Hi-lume 1% EcoSystem
(Integral)
L3DOE Lutron Hi-lume Premier 0.1%
EcoSystem (Remote)

Diffuser

SW Satin opal acrylic (bottom)
CB Extruded aluminum cover (bottom)
SA Satin clear acrylic (top)
CT Extruded aluminum cover (top)

Finish⁴

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
22 Painted custom color

Options

AM Accent module
(see page 41 for details)
SC Single circuit
DC Dual circuit
CC Clear insulated cable (standard)⁵
WC White cable
BC Black cable

Notes

¹Nominal lumens

²For no direct or indirect light specify 00

³82 CRI standard / 90 CRI available








⁴Canopy finish matches housing

⁵96" clear insulated cable standard



Clearline Ceiling

Clearline Ceiling is a clean, linear form for general illumination as well as accent lighting.

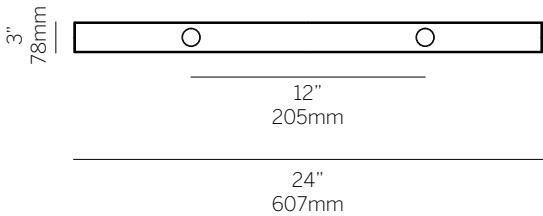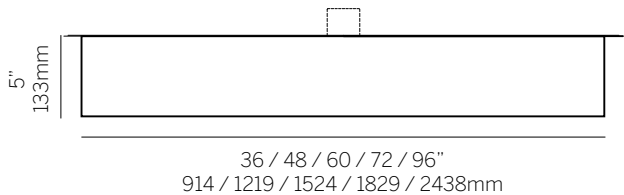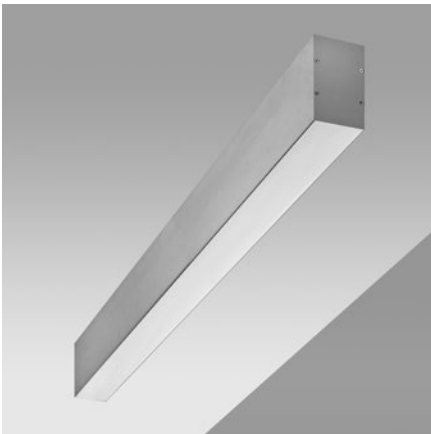

Accent Module

AM

Size¹

24	24" (2 lights)
36	36" (3 lights)
48	48" (4 lights)
Custom	

Voltage

U	120/277
1	120VAC only

Control (Integral 12V)²

RS12	Hatch RS12-60M-LED
RS12277	Hatch RS12-60M-LED-277

Finish

16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
22	Painted custom color

Options

CB	Extruded aluminum cover (bottom)
----	----------------------------------

Notes

- ¹12" standard spacing
- ²Max 12W MR16 GU5.3 LED (by others)

Model CL2

CL2

Type

C	Ceiling
---	---------

C

Size

36	36"
48	48"
60	60"
72	72"
96	96"
Custom	

Wattage¹

36"	
L	9W (1200lm)
M	18W (2229lm)
H	30W (3522lm)
48"	
L	12W (1600lm)
M	24W (2972lm)
H	40W (4696lm)
60"	
L	15W (2000lm)
M	30W (3715lm)
H	50W (5870lm)
72"	
L	18W (2400lm)
M	36W (4458lm)
H	60W (7044lm)
96"	
L	24W (3200lm)
M	48W (5944lm)
H	80W (9392lm)

Color Temp²

827	2700
830	3000
835	3500
840	4000

Voltage

U	120/277
1	120VAC only

Control (24V)

S	Non-dim (Integral)
D010	0-10V 10% (Integral)
DFPN	Lutron Forward Phase 1% 120VAC (Integral)
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)

Diffuser

SW	Satin opal acrylic
----	--------------------

Finish

16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
22	Painted custom color

Options

AM	Accent module
----	---------------

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³12" distance between accent lights standard (contact factory for other accent light spacings)


For up to date technical information, refer to inter-lux.com/alm





Clealine Wall

The Clealine Wall is a simple linear lighting option for ambient illumination in public or private spaces providing both direct and indirect lighting performance.

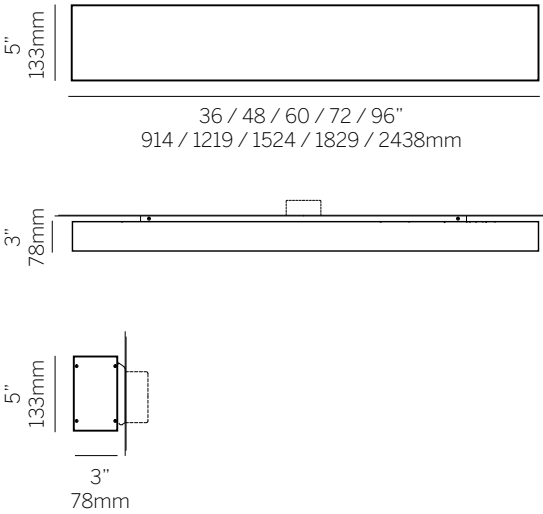

Model CL2

Type
W Wall

Size
36 36"
48 48"
60 60"
72 72"
96 96"
Custom

Wattage¹
direct²

36"

LD	9W (1200lm)
MD	18W (2229lm)
HD	30W (3522lm)

48"

LD	12W (1600lm)
MD	24W (2972lm)
HD	40W (4696lm)

60"

LD	15W (2000lm)
MD	30W (3715lm)
HD	50W (5870lm)

72"

LD	18W (2400lm)
MD	36W (4458lm)
HD	60W (7044lm)

96"

LD	24W (3200lm)
MD	48W (5944lm)
HD	80W (9392lm)

CL2

W

indirect²

Color Temp ³		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
I	120VAC only	
Control (24V)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
SA	Satin clear acrylic (top)	SA SW
SW	Satin opal acrylic (bottom)	
Finish		
16	Clear anodized aluminum	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
DC	Dual circuit	





Notes

¹Nominal lumens
²For no direct or indirect light specify 00
³82 CRI standard / 90 CRI available



Frame

In various sizes, direct or indirect illumination, Frame is suitable for individual workspace task lighting, conference rooms or larger spaces when used in multiple configurations. Extruded aluminum construction allows the flexibility to alter the dimensions easily and economically.

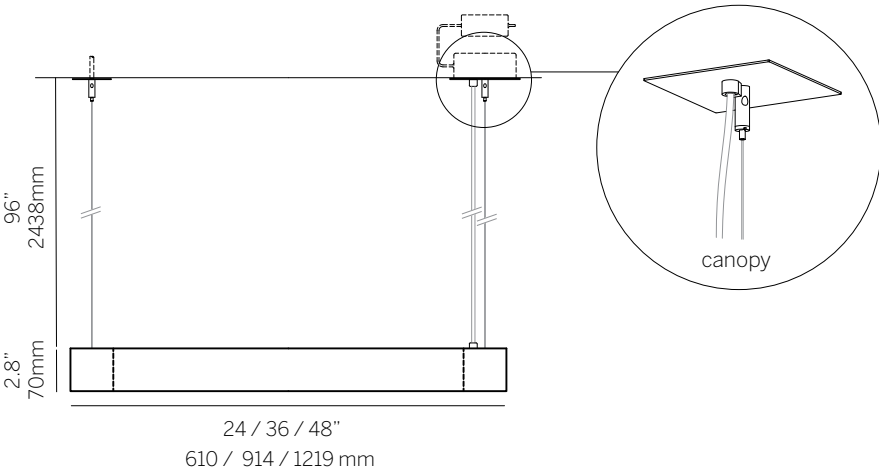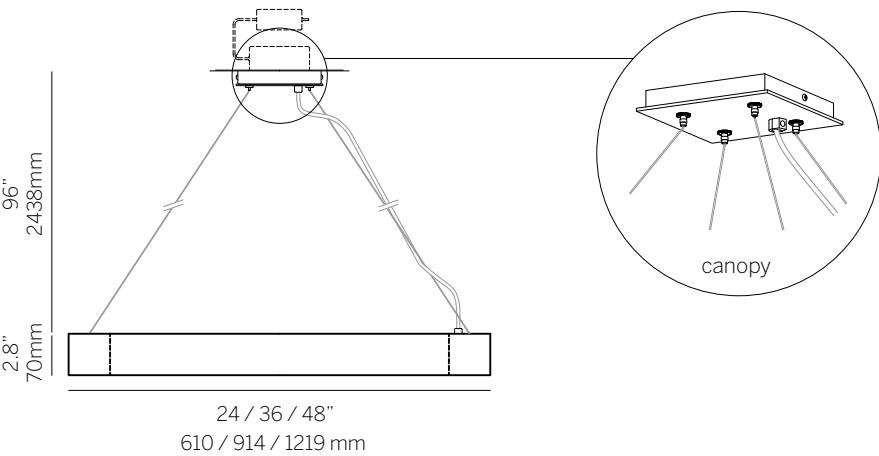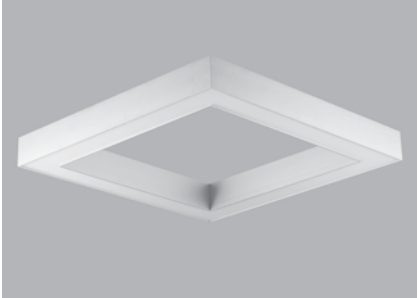

Notes


¹Nominal lumens
²82 CRI standard / 90 CRI available
³Canopy finish matches housing
⁴96" clear insulated cable standard
For up to date technical information, refer to inter-lux.com/alm

Model 1545	1545
Type	
P	Pendant
S	Surface
Size	
24	24"
36	36"
48	48"
Custom	
Wattage¹	
24"	
L	20W (2666lm)
M	40W (4952lm)
36"	
L	32W (4267lm)
M	64W (7925lm)
48"	
L	44W (5867lm)
M	88W (10897lm)
Color Temp²	
827	2700
830	3000
835	3500
840	4000
Voltage	
U	120/277
I	120VAC only
Control (Remote 24V)	
S	Non-dim
D010	0-10V 10%
DFPN	Lutron Forward Phase 1% 120VAC
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem
Diffuser	
SW	Satin opal acrylic
Finish³	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
22	Painted custom color
Options	
CE	Center canopy
SC	Straight cables
CC	Clear insulated cable (standard) ⁴
WC	White cable
BC	Black cable




Fuse

Fuse is used as general illumination as well as decorative feature either individually or suspended in groups. It has an even glow of light and is available fully dimmable.

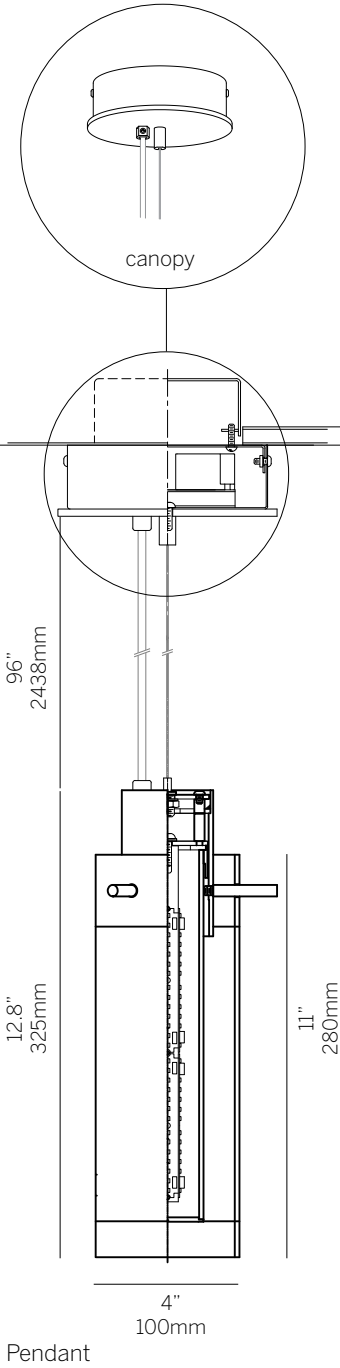

Pendant

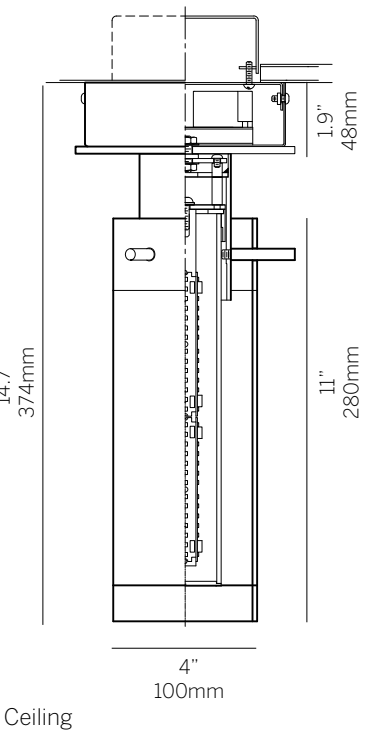

Ceiling

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard



For up to date technical information, refer to inter-lux.com/alm

Model	1571	1571
Type		
P	Pendant	
C	Ceiling	
Size		
11	11"	
Custom		
Wattage¹		
L	8W (1066lm)	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (24V)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
CG	Clear, etched acrylic with inner diffuser	CG
Finish³		
12	Satin nickel	
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	




Gran Fuse

A suspended luminaire for large scale spaces, the Gran Fuse has multiple performance options and a classic form.




86" 2185mm
38 / 50 / 62" 971 / 1276 / 1581mm




4.7" 120mm
7" 180mm

Standard




86" 2185mm
43 / 55 / 67" 1086 / 1390 / 1695mm



4.7" 120mm
7" 180mm

Flush downlight



86" 2185mm
43 / 55 / 67" 1086 / 1390 / 1695mm




2.5" 64mm
4" 102mm
7" 180mm

Cylinder downlight

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard

For up to date technical information, refer to inter-lux.com/alm

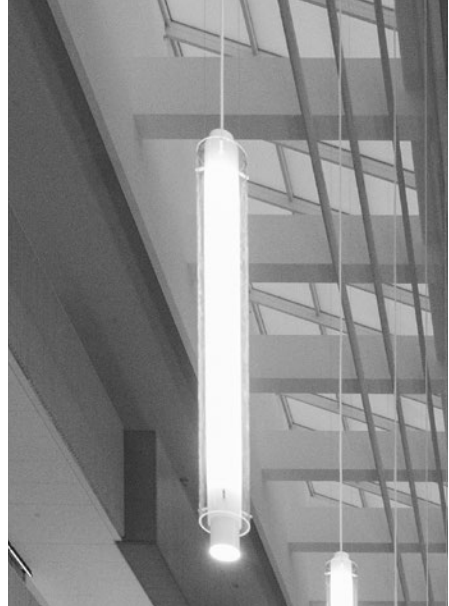


Model 1575		1575
Type		
P	Pendant	P
Size		
38	38"	
43	43"	
50	50"	
55	55"	
62	62"	
67	67"	
Custom (up to 74" standard, 79" downlight)		
Wattage¹		
General Light		
38 / 43"		
L	24W (3200lm)	
50 / 55"		
L	36W (4800lm)	
62 / 67"		
L	48W (6400lm)	
Downlight		
M	8.4W (1,311lm) @ 500 mA	
H	12.6W (1710lm) @ 700mA	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
RGB	RGB	
RGBW	RGBW	
Voltage		
U	120/277	
I	120VAC only	
Control (General / 24V)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Remote)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Remote)	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Control (Downlight / Constant Current)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
ECO30W	EldoLED 0-10V 1% (Remote)	
DFPN	Lutron Forward Phase 1% 120VAC (Remote)	
PEQ1	Lutron Hi-lume 1% EcoSystem (Integral)	
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem (Integral)	
Diffuser		
AA	Clear acrylic	AA
SW	Satin opal acrylic	SW
Finish³		
12	Satin nickel	
19	Painted anodized aluminum - RAL 9006 Matte	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
D	Flush downlight	
CL	Extended cylinder light	
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	





Plume

White opal diffuser in combination with natural metal finishes offers uniform contemporary design and a distinctive look. With two very different lighting performance options, Plume can be used for accent over a work surface, or general space illumination.

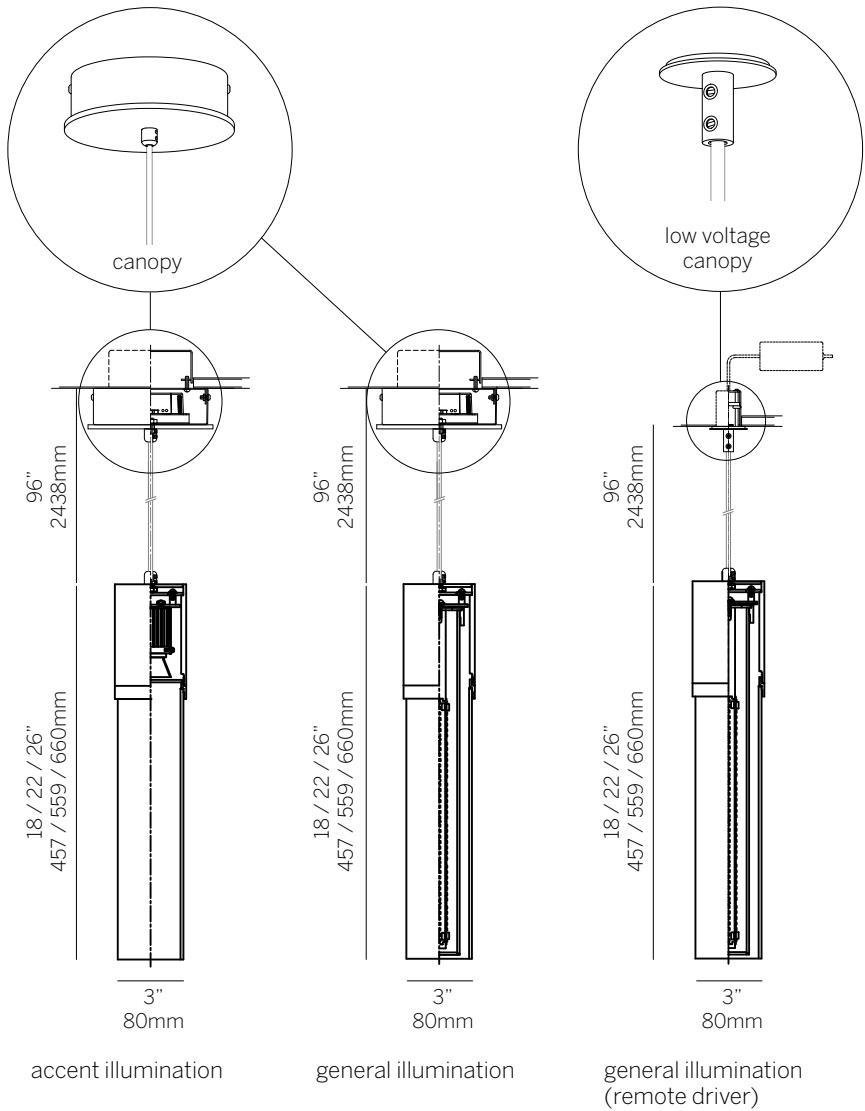

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard


Model 1560		1560
Type		P
P	Pendant	
Size		
18	18"	
22	22"	
26	26"	
Custom		
Wattage¹		
Accent Illumination		
18" / 22" / 26"		
M	8.4W (131lm) @ 500mA	
H	12.6W (1710lm) @ 700mA	
General Illumination		
18"		
L	12W (1600lm)	
22"		
L	16W (2133lm)	
26"		
L	20W (2666lm)	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (Accent / Constant Current)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
ECO30W	EldoLED 0-10V 1% (Remote)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
PEQ1	Lutron Hi-lume 1% EcoSystem (Integral)	
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem (Integral)	
Control (General / 24V)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
WA	White opal acrylic	
WG	White opal glass	
Finish³		
10	Satin stainless steel	
12	Satin nickel	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	






Puck

Suspended and ceiling mount with 80%:20% direct/indirect light in multiple sizes and lumen packages for large or small space illumination.

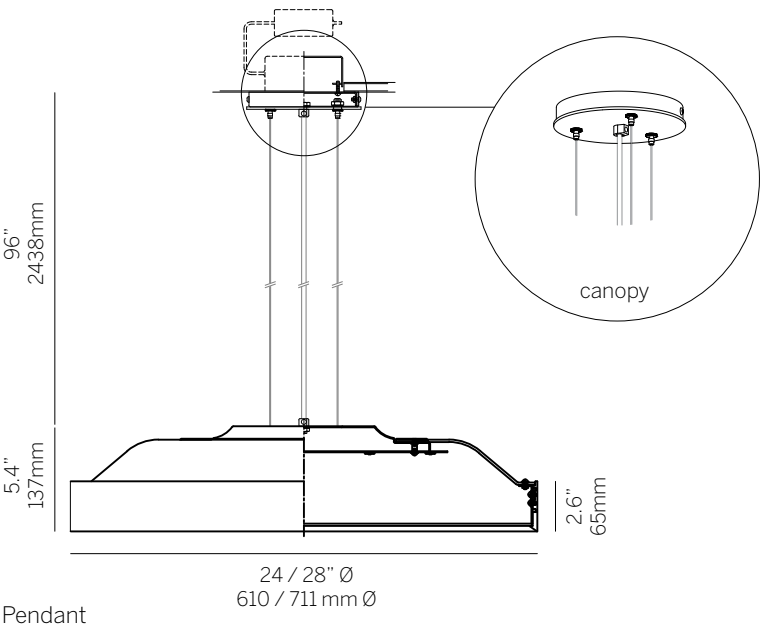

Pendant

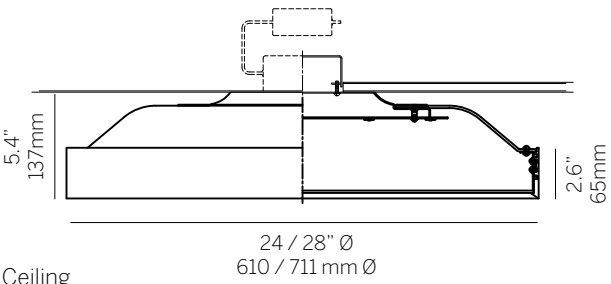

Ceiling

- Notes**
- ¹Nominal lumens
 - ²82 CRI standard / 90 CRI available
 - ³Canopy finish matches housing
 - ⁴96" clear insulated cable standard



Model 1500		1500
Type		
P	Pendant	
C	Ceiling	
Size		
24	24" Ø	
28	28" Ø	
Wattage¹		
24"		
L	17W (2220lm)	
M	33W (4087lm)	
28"		
L	29W (3800lm)	
M	57W (7059lm)	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (Remote 24V)		
S	Non-dim	
D010	0-10V 10%	
DFPN	Lutron Forward Phase 1% 120VAC	
L3DAE	Lutron Hi-lume 1% EcoSystem	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem	
Diffuser		
SW	Satin opal acrylic	SW
Finish³		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
26	Painted black - RAL 9005 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	






Ring D

Simple Ring D with direct illumination in various diameters and lumen packages can be used in a wide variety of applications. Consider modifying the Ring, or adding other standard or custom products to meet special requirements.

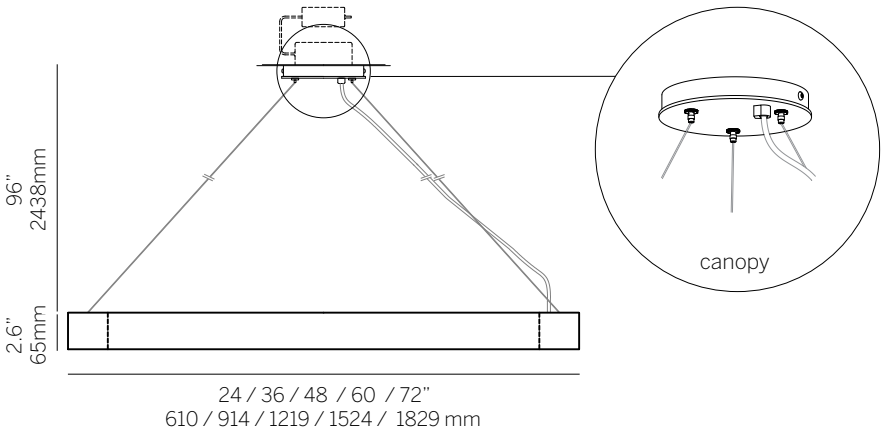

Center Canopy (standard)
(suspension varies with fixture size please confirm with factory)

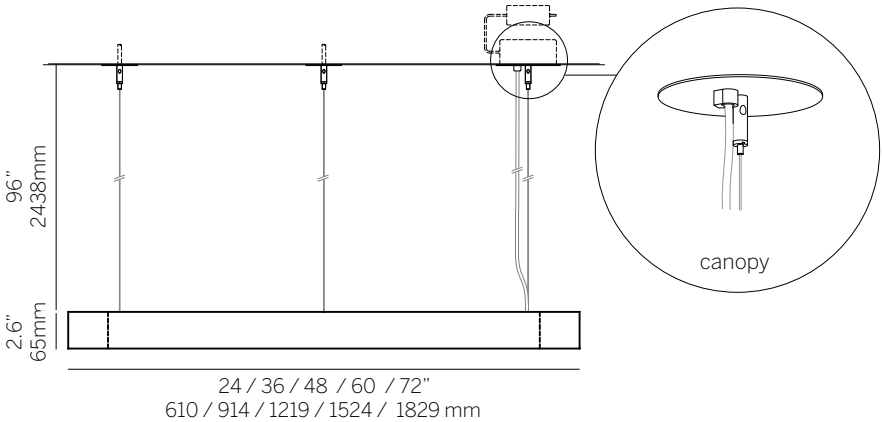

Straight Cables



Notes



- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard

Model 1691	1691
Type	P
P Pendant	
Size	
24 24"	
36 36"	
48 48"	
60 60"	
72 72"	
Custom	
Wattage¹	
24"	
L 17W (2267lm)	
M 34W (4211lm)	
RGB 60W (1551lm)	
36"	
L 26W (3467lm)	
M 52W (6440lm)	
RGB 92W (2397lm)	
48"	
L 35W (4667lm)	
M 70W (8669lm)	
RGB 125W (3243lm)	
60"	
L 45W (6000lm)	
M 90W (11145lm)	
RGB 162W (4230lm)	
72"	
L 54W (7200lm)	
M 108W (13374lm)	
RGB 195W (5076lm)	
Color Temp²	
827 2700	
830 3000	
835 3500	
840 4000	
RGB RGB	
Voltage	
U 120/277	
1 120VAC only	
Control (Remote 24V)	
S Non-dim	
D010 0-10V 10%	
DFPN Lutron Forward Phase 1% 120VAC	
L3DAE Lutron Hi-lume 1% EcoSystem	
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem	
DMX DMX dimming	
Diffuser	
SW Satin opal acrylic	SW
Finish³	
19 Painted anodized aluminum - RAL 9006 matte	
21 Painted white - RAL 9010 matte	
26 Painted black - RAL 9005 matte	
22 Painted custom color	
Options	
CE Center canopy	
SC Straight cables	
CC Clear insulated cable (standard) ⁴	
WC White cable	
BC Black cable	



Ring UD

A Direct/Indirect luminaire, the Ring UD will fill any space with light and create a voluminous effect. Offered in a wide variety of standard diameters and lumen packages, the Ring is available for as much modification as your imagination will allow, including RGB, ovals and squares.

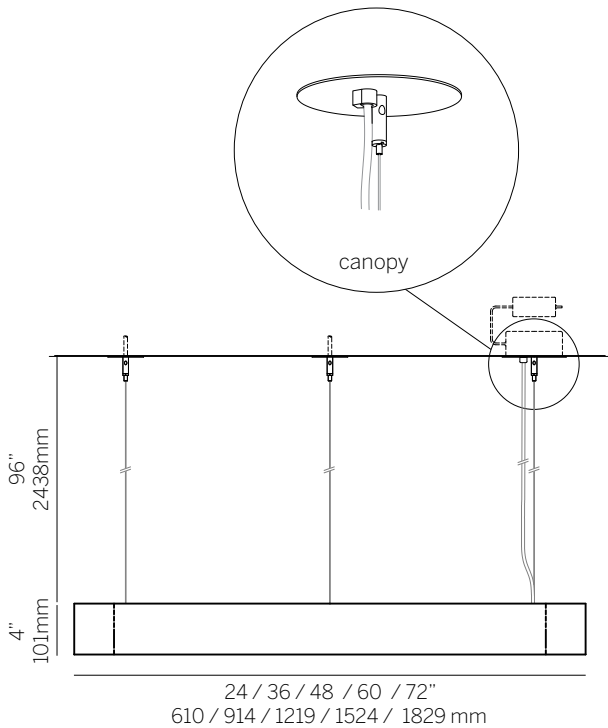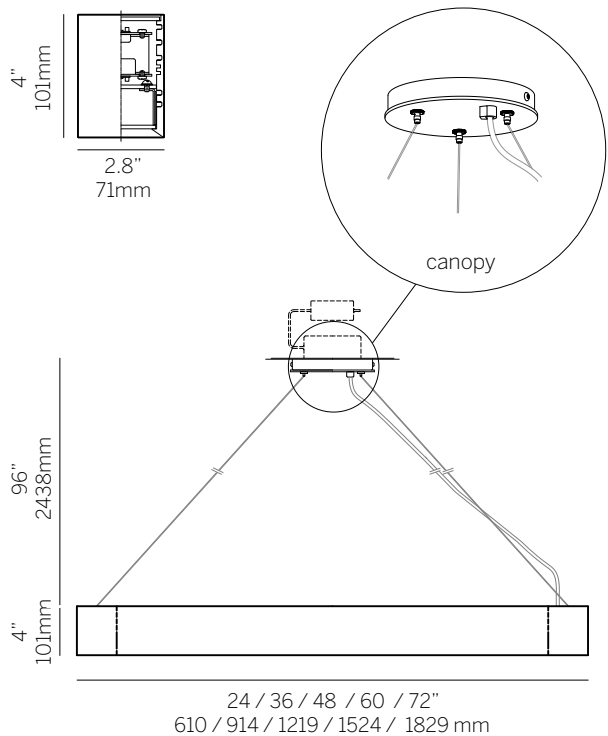

Model 1692

Type

P Pendant

Size

24 24"
36 36"
48 48"
60 60"
72 72"
Custom

Wattage¹

direct²

24"

LD 17W (2267lm)
MD 34W (4211lm)
RGBD 60W (1551lm)

36"

LD 26W (3467lm)
MD 52W (6440lm)
RGBD 92W (2397lm)

48"

LD 35W (4667lm)
MD 70W (8669lm)
RGBD 125W (3243lm)

60"

LD 45W (6000lm)
MD 90W (11145lm)
RGBD 162W (4230lm)

72"

LD 54W (7200lm)
MD 108W (13374lm)
RGBD 195W (5076lm)

1692

P

indirect²

LI 17W (2267lm)
MI 34W (4211lm)
RGBI 60W (1551lm)

LI 26W (3467lm)
MI 52W (6440lm)
RGBI 92W (2397lm)

LI 35W (4667lm)
MI 70W (8669lm)
RGBI 125W (3243lm)

LI 45W (6000lm)
MI 90W (11145lm)
RGBI 162W (4230lm)

LI 54W (7200lm)
MI 108W (13374lm)
RGBI 195W (5076lm)

Notes

¹Nominal lumens

²For no direct or indirect light specify 00

³82 CRI standard / 90 CRI available

⁴Canopy finish matches housing

⁵96" clear insulated cable standard

Color Temp³

827 2700
830 3000
835 3500
840 4000
RGB RGB

Voltage

U 120/277
1 120VAC only

Control (Remote 24V)

S Non-dim
D010 0-10V 10%
DFPN Lutron Forward Phase 1% 120VAC
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem
DMX DMX dimming

Diffuser

SW Satin opal acrylic (bottom)
CB Extruded aluminum cover (bottom)
SA Satin clear acrylic (top)
CT Extruded aluminum cover (top)

Finish⁴

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color



Options

CE Center canopy
SC Straight cables
SA Single circuit
DC Dual circuit
CC Clear insulated cable (standard)⁵
WC White cable
BC Black cable




Ring U

The Ring U is for uplight only - where the requirement is to provide glare-free light that fills the space. Consider the many standard and custom modifications that can be used to make this a unique solution.

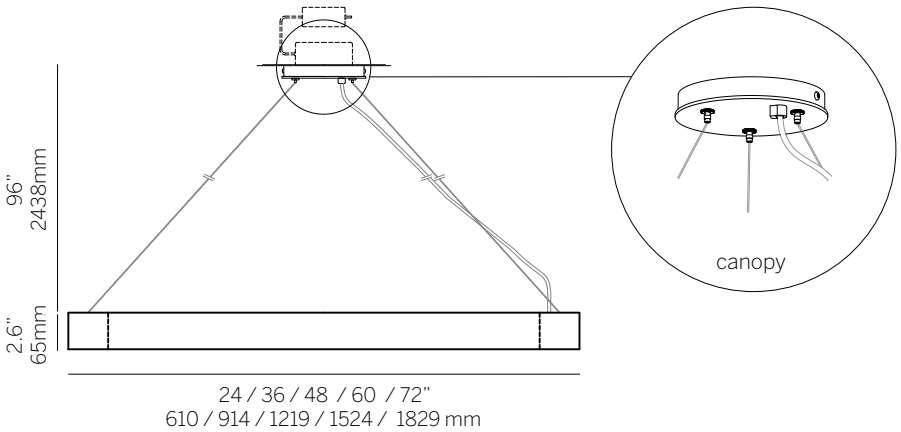

Center Canopy (standard)
(suspension varies with fixture size please confirm with factory)

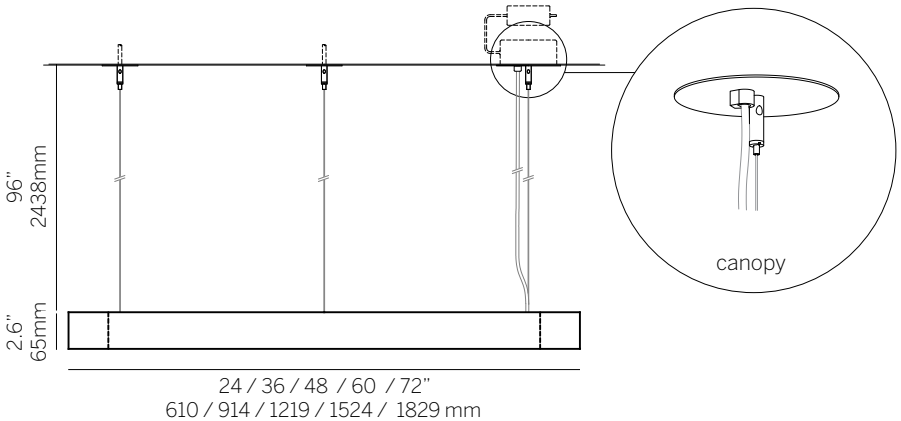

Straight Cables

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard





For up to date technical information, refer to inter-lux.com/alm

Model 1693		1693
Type		P
P	Pendant	
Size		
24"	24"	
36"	36"	
48"	48"	
60"	60"	
72"	72"	
Custom		
Wattage ¹		
24"		
L	17W (2267lm)	
M	34W (4211lm)	
RGB	60W (1551lm)	
36"		
L	26W (3467lm)	
M	52W (6440lm)	
RGB	92W (2397lm)	
48"		
L	35W (4667lm)	
M	70W (8669lm)	
RGB	125W (3243lm)	
60"		
L	45W (6000lm)	
M	90W (11145lm)	
RGB	162W (4230lm)	
72"		
L	54W (7200lm)	
M	108W (13374lm)	
RGB	195W (5076lm)	
Color Temp ²		
827	2700	
830	3000	
835	3500	
840	4000	
RGB	RGB	
Voltage		
U	120/277	
1	120VAC only	
Control (Remote 24V)		
S	Non-dim	
D010	0-10V 10%	
D010	Lutron Forward Phase 1% 120VAC	
L3DAE	Lutron Hi-lume 1% EcoSystem	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem	
DMX	DMX dimming	
Diffuser		
SA	Satin clear acrylic	SA
Finish ³		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
26	Painted black - RAL 9005 matte	
22	Painted custom color	
Options		
CE	Center canopy	
SC	Straight cables	
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	



Sigma

Wall sconce with formed aluminum housing and machined end caps. Diffuser is Clear Satin Acrylic. The fixture can be arranged vertically or horizontally.

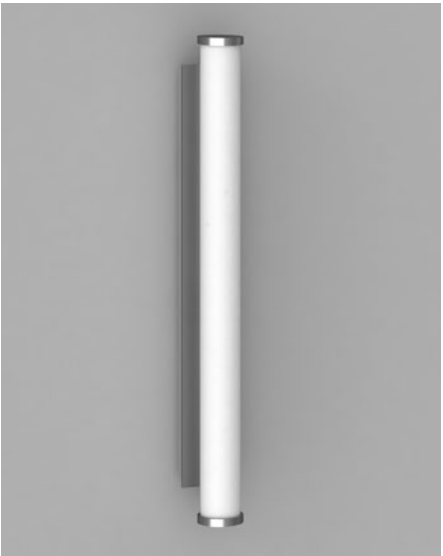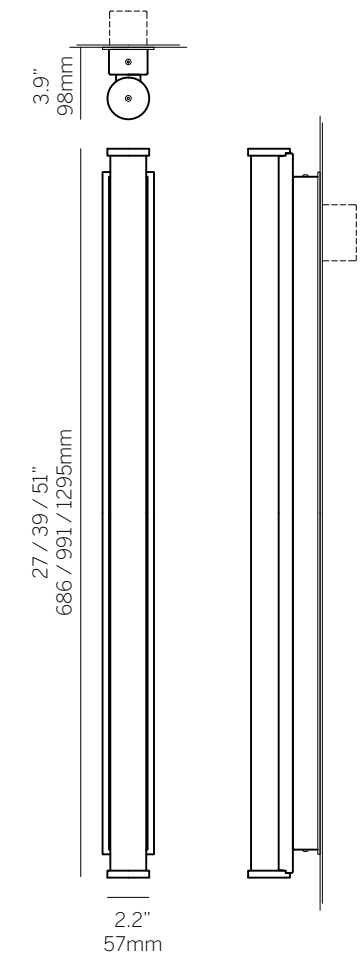

Notes

¹Nominal lumens
²82 CRI standard / 90 CRI available
³For wet location all controls are remote



Model 1740		1740
Type		W
W	Wall	
Size		
27	27"	
39	39"	
51	51"	
Custom		
Wattage ¹		
27"		
L	6W (800lm)	
M	12W (1486lm)	
H	20W (2348lm)	
39"		
L	9W (1200lm)	
M	18W (2229lm)	
H	30W (3522lm)	
51"		
L	12W (1600lm)	
M	24W (2972lm)	
H	40W (4696lm)	
Wet location		
27"		
M	10W (750lm)	
39"		
M	14W (1125lm)	
51"		
M	19W (1500lm)	
Color Temp ²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (24V) ³		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
D010	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		SA
SA	Satin clear acrylic	
Finish ³		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
EC	Chrome end caps	
WL	Wet location	






Step

Shallow, square pendant or surface mounted versions in various sizes, with 10% uplight. Even illumination on the satin white lens. Also available in ceiling mount version.

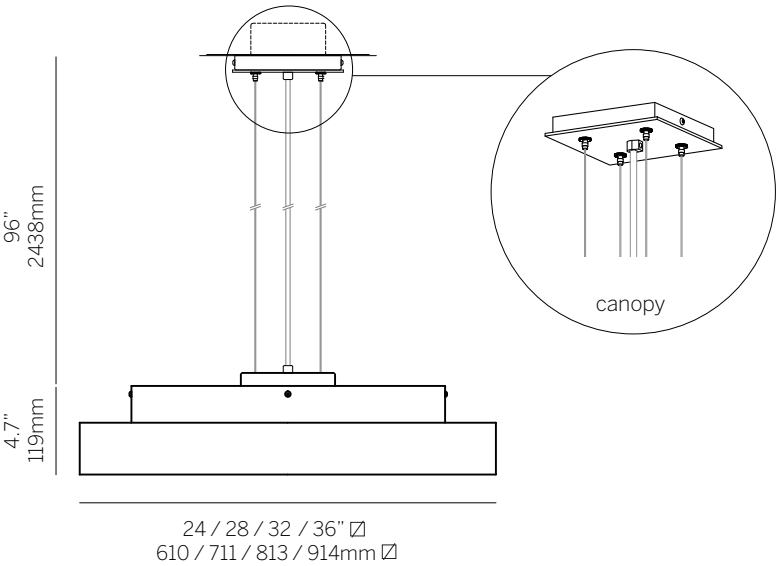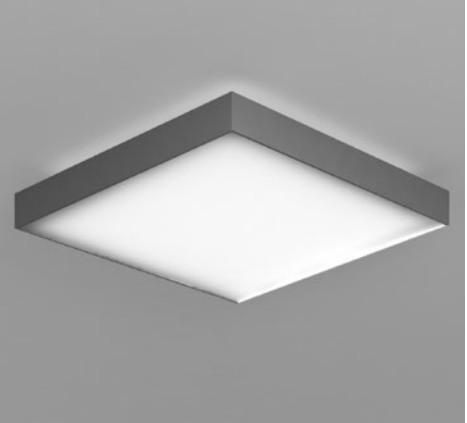

Pendant

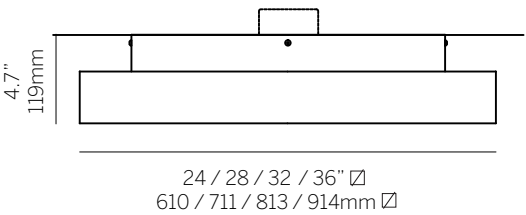

Surface

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard

Model 1540		1540
Type		
P	Pendant	
S	Surface	
Size		
24	24" □	
28	28" □	
32	32" □	
36	36" □	
Custom		
Wattage¹		
24"		
L	28W (3733lm)	
28"		
L	40W (5333lm)	
32"		
L	54W (7200lm)	
36"		
L	77W (10267lm)	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (24V)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
SW	Satin opal acrylic (bottom)	
XX	Clear polycarbonate - sanded both sides (top)	
Finish³		
16	Clear anodized aluminum	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	





For up to date technical information, refer to inter-lux.com/alm




Step RC


The clean lines of the Step RC make it suitable for use in any modern environment. Step RC is available in pendant and surface versions with evenly illuminated satin white lens, and 10% uplight. In various sizes and with different light sources it is suitable for individual workspace task lighting, conference rooms or larger spaces when used in multiple configurations.

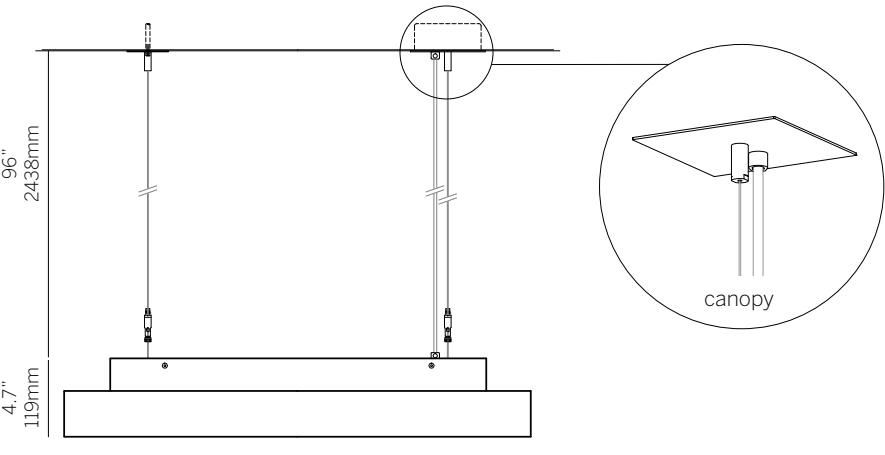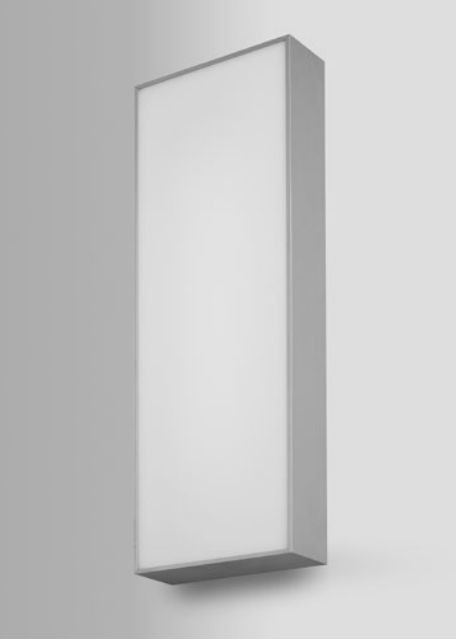

Pendant
24 / 28 / 32 / 36 / 48"
610 / 711 / 813 / 914 / 1219 mm

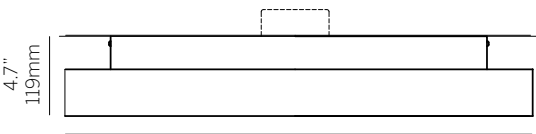

Surface
24 / 28 / 32 / 36"
610 / 711 / 813 / 914 / 1219 mm

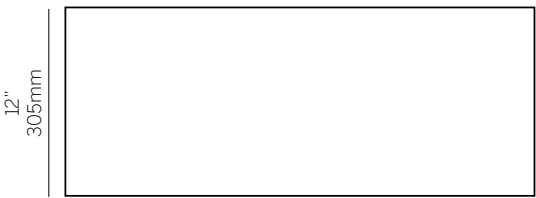

24 / 28 / 32 / 36"
610 / 711 / 813 / 914mm

Notes
¹Nominal lumens
²82 CRI standard / 90 CRI available
³Canopy finish matches housing
⁴96" clear insulated cable standard





For up to date technical information, refer to inter-lux.com/alm

Model 1541		1541
Type		
P	Pendant	
S	Surface	
Size		
24	24"	
28	28"	
32	32"	
36	36"	
48	48"	
Custom		
Wattage¹		
24"		
L	8W (1067lm)	
M	16W (1981lm)	
28"		
L	10W (1333lm)	
M	20W (2477lm)	
32"		
L	12W (1600lm)	
M	24W (2972lm)	
36"		
L	14W (1867lm)	
M	28W (3467lm)	
48"		
L	20W (2667lm)	
M	40W (4953lm)	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
I	120VAC only	
Control (24V)		
S	Non-dim (Integral)	
D010	0-10V 10% (Integral)	
DFPN	Lutron Forward Phase 1% 120VAC (Integral)	
L3DAE	Lutron Hi-lume 1% EcoSystem (Integral)	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem (Remote)	
Diffuser		
SW	Satin opal acrylic (bottom)	
XX	Clear polycarbonate - sanded both sides (top)	
Finish³		
16	Clear anodized aluminum	
21	Painted white - RAL 9010 matte	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard) ⁴	
WC	White cable	
BC	Black cable	




Stick

At just under 3” diameter, Stick appears like a flying candle. When used individually, or in groupings with a custom canopy or attached to ARC, Stick provides functional illumination in the space.

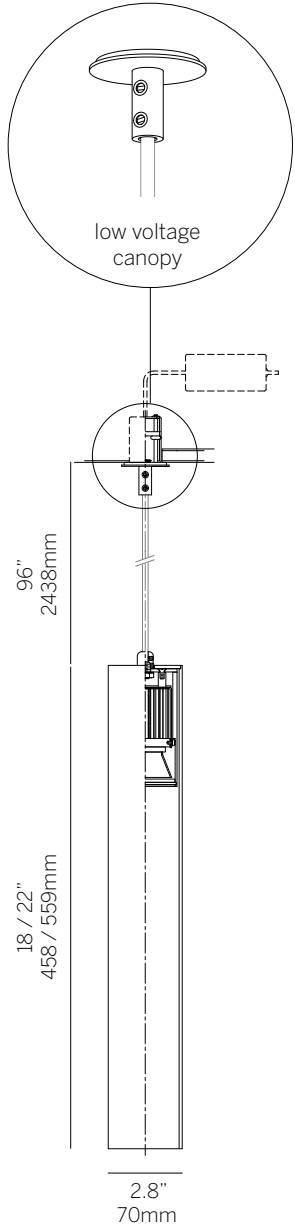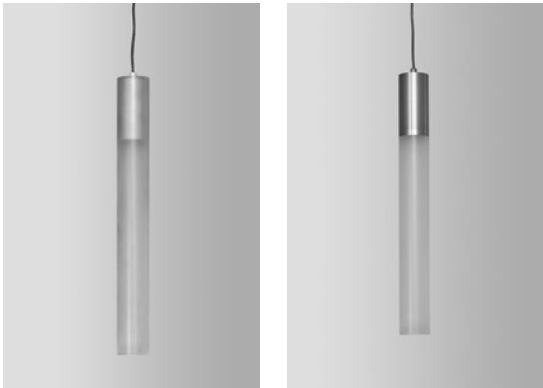

AT

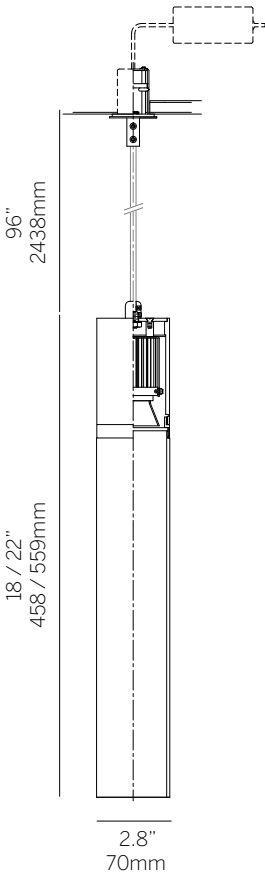

MT

Notes
¹Nominal lumens ²82 CRI standard / 90 CRI available
³Canopy finish matches housing
⁴AT fixture and canopy white standard, other colors optional on canopy
⁵96” clear insulated cable standard




Model 1592		1592
AT	Acrylic top	
MT	Metal top	
Type		
P	Pendant	P
Size		
18	18"	
22	22"	
Custom		
Wattage¹		
M	8.4W (1,311 lm) @ 500 mA	
H	12.6W (1710lm) @ 700mA	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
1	120VAC only	
Control (Constant Current, Remote)		
S	Non-dim	
D010	0-10V 10%	
ECO30W	EldoLED 0-10V 1%	
DFPN	Lutron Forward Phase 1% 120VAC	
PEQ1	Lutron Hi-lume 1% EcoSystem	
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem	
Diffuser		
SA	Satin clear acrylic	SA
Finish³,⁴		
21	Painted white - RAL 9010 matte	
29	Anodized aluminum - titan	
22	Painted custom color	
Options		
CC	Clear insulated cable (standard)⁴	
WC	White cable	
BC	Black cable	








Stick M


At just under 3" diameter, the all metal Stick M is used individually or in groupings with a custom canopy or attached to ARC, Stick provides functional illumination in the space.

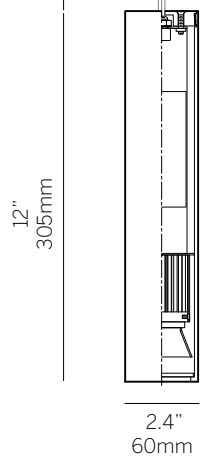

Pendant

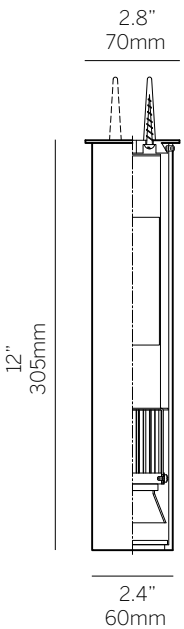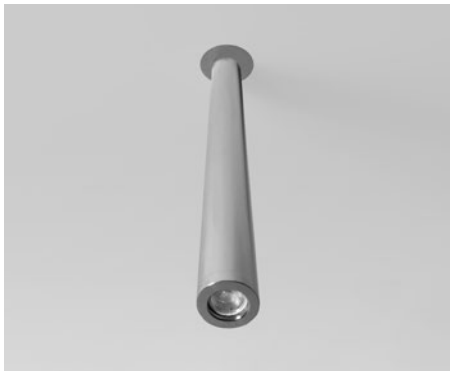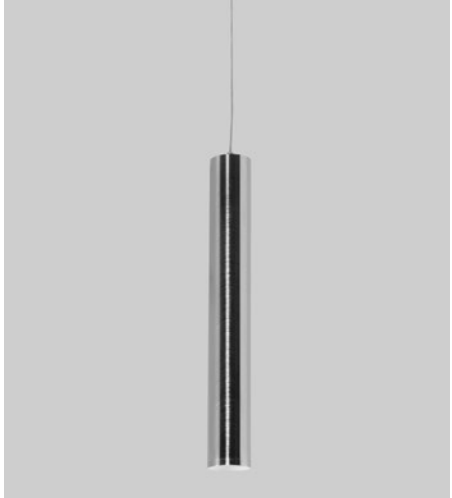

Surface



Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Canopy finish matches housing
- ⁴96" clear insulated cable standard

Model 1593 1593

Type

- C Ceiling
- P Pendant

Size

- 12 12"
- Custom

Wattage¹

- M 8.4W (1,311 lm) @ 500 mA
- H 12.6W (1710lm) @ 700mA

Color Temp²

- 827 2700
- 830 3000
- 835 3500
- 840 4000

Voltage

- U 120/277
- I 120VAC only

Control (Constant Current)

- S Non-dim (integral)
- D010 0-10V 10% (integral)
- ECO30W EldoLED 0-10V 1% (Remote)
- DFPN Lutron Forward Phase 1% 120VAC (Remote)
- PEQ1 Lutron Hi-lume 1% EcoSystem (integral)
- PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem (integral)

Finish³

- 18 Polished aluminum

18


Options

- CC Clear insulated cable (standard)⁴
- WC White cable
- BC Black cable



Wedge

Wedge is an ultra-small scale linear product that delivers low angle, smooth patterned light to an adjacent surface. Perfect for wall mounted uplight, the Wedge delivers light evenly to the ceiling, in a forward distribution that is nearly horizontal to the top of the fixture. As a ceiling mounted wallwash, the Wedge can be mounted close to the wall and deliver an even wash of light. Use as individual luminaires, or in continuous row mounting, the Wedge can be specified to absolutely any length.

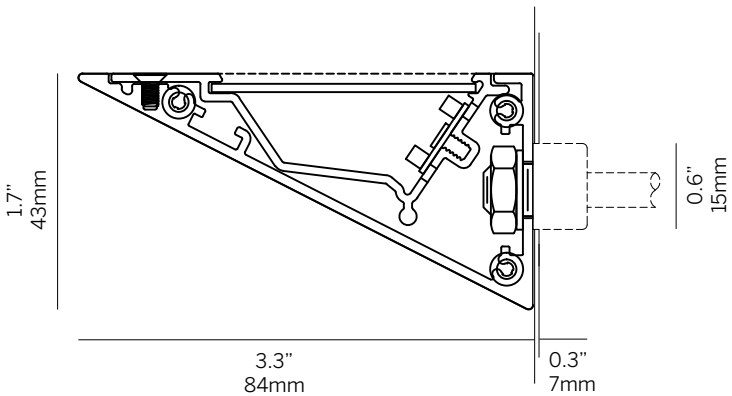

Notes
¹Nominal lumens
²82 CRI standard / 90 CRI available



For up to date technical information, refer to inter-lux.com/alm

Model 2537		2537
Type		W
W	Wall	
Size		_____
Please specify length		
Wattage¹		_____
L	3 W/ft (400 lm/ft)	
M	6 W/ft (743 lm/ft)	
H	10 W/ft (1174 lm/ft)	
Color Temp²		_____
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		_____
U	120/277	
1	120VAC only	
Control (Remote 24V)		_____
S	Non-dim	
D010	0-10V 10%	
DFPN	Lutron Forward Phase 1% 120VAC	
L3DAE	Lutron Hi-lume 1% EcoSystem	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem	
Diffuser		SA
SA	Satin clear acrylic	
Finish		_____
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
26	Painted black - RAL 9005 matte	
22	Painted custom color	
Options		_____
WL	Wet location	



Wing

Wing provides glare-free indirect illumination when mounted horizontally, it is perfect for stairways and corridors with open ceilings.

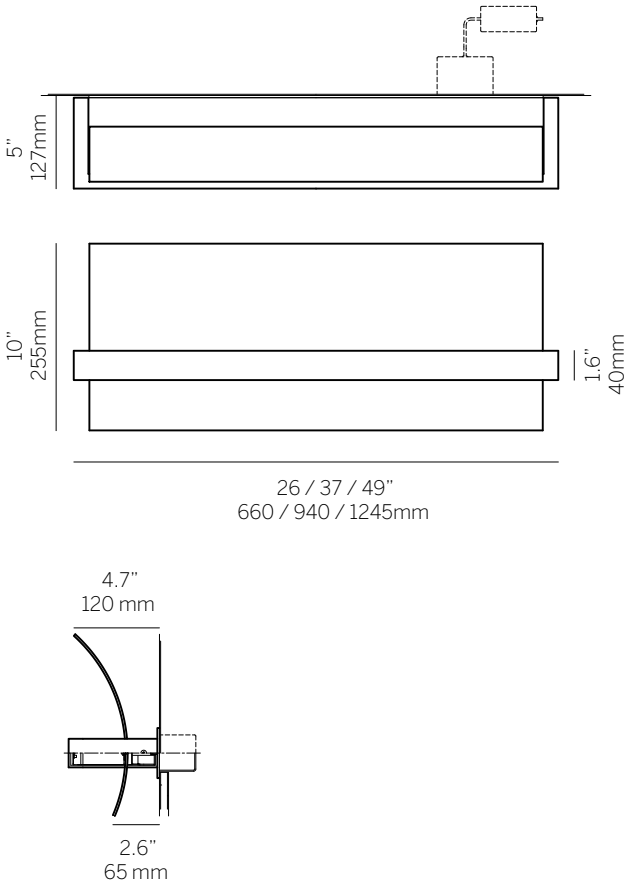
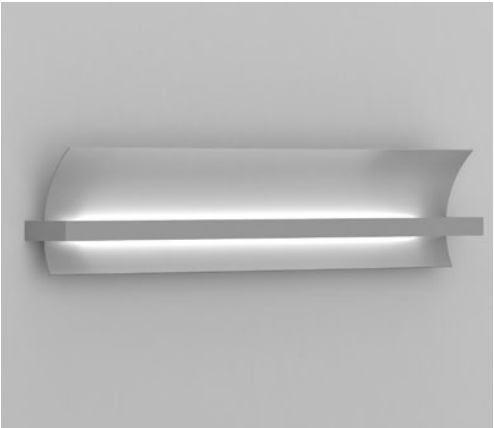


Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Reflector is painted white - RAL 9010, 30% Gloss.




For up to date technical information, refer to inter-lux.com/alm

Model 1820		1820
Type		W
W	Wall	
Size		
26	26"	
37	37"	
49	49"	
Custom		
Wattage¹		
26"		
L	6W (800lm)	
M	12W (1486lm)	
H	20W (2348lm)	
37"		
L	9W (1133lm)	
M	17W (2106lm)	
H	28W (3326lm)	
49"		
L	12W (1533lm)	
M	23W (2848lm)	
H	38W (4500lm)	
Color Temp²		
827	2700	
830	3000	
835	3500	
840	4000	
Voltage		
U	120/277	
I	120VAC only	
Control (Remote 24V)		
S	Non-dim	
D010	0-10V 10%	
DFPN	Lutron Forward Phase 1% 120VAC	
L3DAE	Lutron Hi-lume 1% EcoSystem	
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem	
Diffuser		SW
SW	Satin opal acrylic	
Finish³		
19	Painted anodized aluminum - RAL 9006 matte	
21	Painted white - RAL 9010 matte	
22	Painted custom color	




Wing AR

Wing AR pendant or surface mounted provides glare-free direct/indirect illumination from a simple architectural shape. A symmetrical, translucent reflector directs light down as well as allows light to softly illuminate the ceiling above.

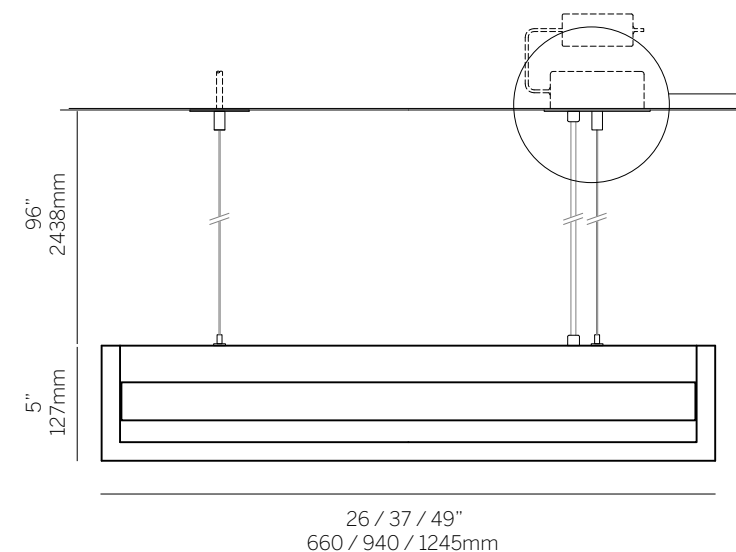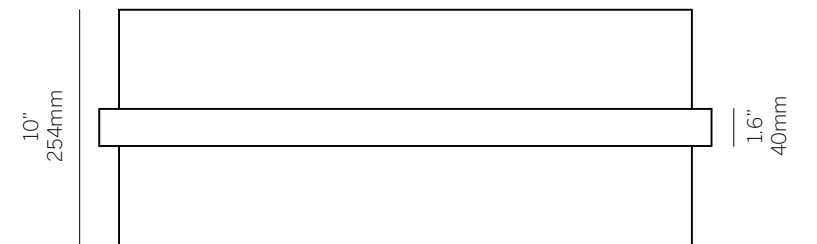

Pendant

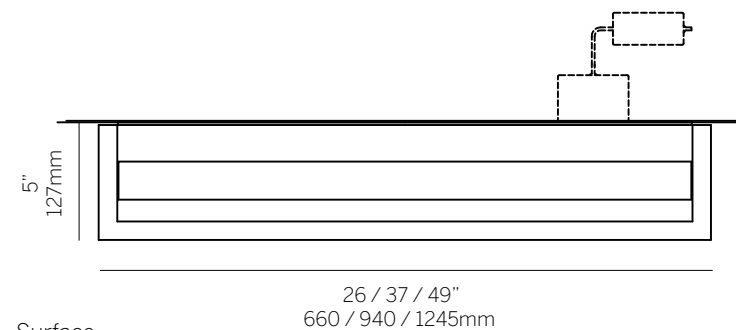

Surface

Notes

- ¹Nominal lumens
- ²82 CRI standard / 90 CRI available
- ³Reflector opal acrylic, Canopy finish matches housing
- ⁴96" clear insulated cable standard



For up to date technical information, refer to inter-lux.com/alm

Model 1821	1821
Type	
P	Pendant
S	Surface
Size	
26"	26"
37"	37"
49"	49"
Custom	
Wattage¹	
26"	
L	6W (800lm)
M	12W (1486lm)
H	20W (2348lm)
37"	
L	9W (1133lm)
M	17W (2106lm)
H	28W (3326lm)
49"	
L	12W (1533lm)
M	23W (2848lm)
H	38W (4500lm)
Color Temp²	
827	2700
830	3000
835	3500
840	4000
Voltage	
U	120/277
1	120VAC only
Control (Remote 24V)	
S	Non-dim
D010	0-10V 10%
D010	Lutron Forward Phase 1% 120VAC
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem
Diffuser	
SW	Satin opal acrylic
Finish³	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
22	Painted custom color
Options	
CC	Clear insulated cable (standard) ⁴
WC	White cable
BC	Black cable

Photo Credits

cover project location architect lighting design photography product	Salisbury University Salisbury, MD Sasaki MCLA Michael K. Wilkinson Gran Fuse	page 22 project location architect photography product	Carroll Community College Carroll Community, MD Grimm + Parker Alain Jaramillo Gran Fuse	page 53 project location architect product	Kennedy Center Washington, DC Group Goetz Archt Puck
page 1/2 project location architect photography product	Laurel Library Laurel, MD Grimm + Parker Michael K. Wilkinson Arc / Fuse	page 23 project location architect photography product	Laurel Library Laurel, MD Grimm + Parker Michael K. Wilkinson Arc	page 55 project	Olympus High School Student Commons Holladay, Utah FFKR Architects Paul Richer Ring D
page 3/4 project location architect photography product	Friends of the Earth Washington, DC greg(g) horgan architecture Michael Wilkinson Ciro	page 25 project	Northern VA Community College Northern, VA Grimm & Parker Ken Wyner Arc UD	page 57 project location architect photography product	Elkridge Library Elkridge, MD Grimm + Parker Sam Kittner Ring UD
page 5 project location architect photography product	Laurel Library Laurel, MD Grimm + Parker Michael K. Wilkinson Arc / Fuse	page 27 project location architect photography product	Laurel Library Laurel, MD Grimm + Parker Michael K. Wilkinson Arc Custom	page 59 project	Carroll City Community College Carroll City, MD Grimm + Parker Ring U
page 7 project location architect	W Hotel Fort Lauderdale, FL Adache Associates/ Clodagh MCLA Ring	page 28 project	Northern VA Community College Northern, VA Grimm & Parker Ken Wyner Arc Custom	page 67 project location architect product	Metropolitan Rockville, MD R2L Architects Stick
lighting design product		location architect photography product		page 69 project location architect	Gum Springs Library Aldie, VA Lukmire Archt / Grimm Parker Ken Wyner Stick M
page 8 project location architect product	South Lake Herndon, VA Noritake Architects Clearline Custom	page 29 project location product	“Mepas Mall” Mostar Mostar, BiH Aura	page 71 project location architect lighting design product	First Residences Washington, DC Hickok Cole CM Kling Wedge
page 9 project location architect lighting design photography product	Salisbury University Salisbury, MD Sasaki MCLA Michael K. Wilkinson Gran Fuse	page 31 project location architect photography product	Friends of the Earth Washington, DC greg(g) horgan architecture Michael Wilkinson Ciro SQ	page 78 project location architect	Temple Adath Israel Merion Station, PA Atkin Olshin Schade Architects BEAM, ltd. Stephen Hoppe Custom Hex Assembly & Candle Sticks
page 11 project location architect photography product	St. Coletta School Washington, DC Robert AM Stern arch Bliss Fassman LD Custom	page 37 project location architect product	Metropolitan Rockville, MD R2L Architects City Outdoor	lighting design photographer product	
page 12 project location architect lighting design product	Dulles International Airport Washington, DC SOM MCLA Custom	page 41 project	Savage Branch & Stem Education Center Laurel, MD Grimm + Parker Clearline Ceiling	page 79 project	Northern VA Community College Northern, VA Grimm & Parker Ken Wyner Gran Fuse
page 13/14 (all photos) project location	Aspers Casino Westfield Stratford City, London lighting Gravity Design Custom Rings	location architect product	Laurel Library Laurel, MD Grimm + Parker Michael K. Wilkinson Frame	location architect photography product	
lighting design product		page 47 project location architect product	Columbia Library Columbia, MD Grimm + Parker Fuse		
page 15/16 project location product	Windsor Racetrack Casino Windsor, Ontario Custom	page 49 project location architect photography product	Carroll Community College Carroll Community, MD Grimm + Parker Alain Jaramillo Gran Fuse		



