



General: Portik is a family of outdoor LED surface mount down lights designed for both residential, hospitality and commercial applications. Available in round or square, different sizes, output and finishes. A polycarbonate lens combined with optical components that have different levels of opacity guarantees a clean beam and optimal efficiency throughout the entire Portik family.

Fixture Body: Open pore anodized and Powder Coated Die-Cast Aluminum. Available in White, Black, Grey and Dark Brown.

Glass: Extra-clear, Tempered glass. Available in Black, Grey and White finish. Mounting: Surface mounted.

Dimensions/Weight: Round: 2.8" (1.49 lbs) – 3.9" (3.20 lbs) – 7.1" (6.17 lbs)
Square: 2.8" (1.49 lbs) – 4.0" (3.20 lbs) – 5.9" (6.17 lbs)

Driver: Remote, 120-277V Dimmable 0-10V or Non-Dim (2.8" & 3.9"). Integral 120/277VAC Non-Dim (7.1" & 5.9").

Wattages: 6.5W (2.8") – 12W (3.9" & 4.0") – 28W (7.1" & 5.9") – 39W (7.1" & 5.9")

Cable: Fixture comes with 0.56' of power cable.

IP rating: IP65 for protection against dust and water jets from any angle.

IK rating: IK 07

ETL Certification: ETL, wet location

Optics: Fixed. Available in Spot – Flood – Wide Flood.

Color temperatures: 2700K – 3000K – 4000K.

CRI: 80+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.




2.8" 6.5W CC

3.9" 12W CC



7.1" 28W IND / 39W IND

2.8" 6.5W CC

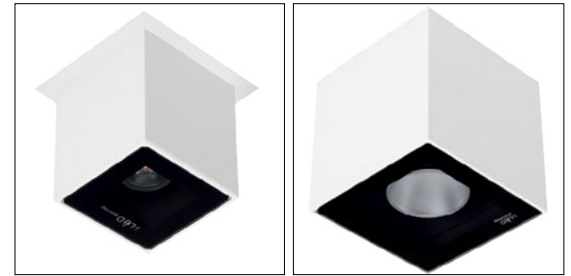

4.0" 12W CC

5.9" 28W CC / 39W IND

Round Delivered Lumens*	2.8" (6 CC)	3.9" (12 CC)	7.1" (28 IND)	7.1" (39 IND)
SP	689	1374	2414	3129
FL	647	1232	2688	3485
WFL	636	1223	2323	3009

*Values shown for 3000K

Square Delivered Lumens*	2.8" (6 CC)	4.0" (12 CC)	5.9" (28 IND)	5.9" (39 IND)
SP	626	1374	2417	3131
FL	598	1232	2690	3486
WFL	561	1223	2321	3008


*Values shown for 3000K

Ordering Information							
POR		F					
Product	Trim	Type	Diameter	Wattage/Operation	Color Temp	Optic	+ Driver (Required for CC) ¹
POR = Portik	RWH = Round White	F = Fixed	28 = 2.8"	6 CC = 6.5W / Constant Current (700mA)	27 = 2700K 30 = 3000K 40 = 4000K	SP = Spot FL = Flood WFL = Wide Flood	CC: ECO30W-XXX SOLO50W-XXX SOLO100W-XXX
	RBL = Round Black		39 = 3.9"	12 CC = 12W / Constant Current (350mA)			
	RGR = Round Gray		71 = 7.1"	28 IND = 28W / Integral 120/277VAC Non-Dim 39 IND = 39W / Integral 120/277VAC Non-Dim			
	RDB = Round Dark Brown	F = Fixed	28 = 2.8"	6 CC = 6.5W / Constant Current (700mA)			
	SWH = Square White		40 = 4.0"	12 CC = 12W / Constant Current (350mA)			
	SBL = Square Black		59 = 5.9"	28 IND = 28W / Integral 120/277VAC Non-Dim 39 IND = 39W / Integral 120/277VAC Non-Dim			
	SGR = Square Gray						
	SDB = Square Dark Brown						

¹ See page 2

ROUND

2.8" 6.5W CC




DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700	SOLO50W-700	SOLO100W-3700
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

3.9" 12W CC




DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)


ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

7.1" 28W IND / 39W IND



SQUARE

2.8" 6.5W CC




DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-700	SOLO50W-700	SOLO100W-3700
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

4.0" 12W CC



DRIVER OPTIONS (pick one)

C.C. Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

5.9" 28W IND / 39W IND

