


# 20 Linear Mini Z Cove

## WG-20MZC-...-OD-W

Delivered Lumens Per Foot

		Power						
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
CCT	927	159	307	577	887	-	-	-
	930	166	320	601	924	-	-	-
	935	172	331	623	958	-	-	-
	940	173	340	639	983	-	-	-
	TW <sup>1</sup>	92	167	299	453	-	-	-
	WD <sup>1</sup>	-	-	-	-	133	277	400
	RGBW <sup>2</sup>	-	-	-	-	-	226	-
UGR <sup>3</sup>		26.4	28.7	30.9	32.4	-	-	-




Beam Angle (0-180) = 81.9  
Beam Angle (90-270) = 116.3

## WG-20MZC-...-SD-W

Delivered Lumens Per Foot

		Power						
		P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
CCT	927	226	437	821	1263	-	-	-
	930	236	455	855	1315	-	-	-
	935	244	472	886	1363	-	-	-
	940	247	484	910	1399	-	-	-
	TW <sup>1</sup>	131	237	425	645	-	-	-
	WD <sup>1</sup>	-	-	-	-	190	394	570
	RGBW <sup>2</sup>	-	-	-	-	-	322	-
UGR <sup>3</sup>		30.8	33.1	35.3	36.8	-	-	-



Beam Angle (0-180) = 62.4  
Beam Angle (90-270) = 106.6

	Power Multiplier						
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
9XX	0.18	0.35	0.65	1.00	-	-	-
TW	0.10	0.17	0.31	0.47	-	-	-
WD	-	-	-	-	0.14	0.29	0.42
RGBW	-	-	-	-	-	0.24	-


CCT Multiplier			
927	930	935	940
0.93	0.97	1.00	1.03

- 1 TW lumen data at maximum output (4000K). WD lumen data at maximum output (3000K).
- 2 RGBW lumen data at maximum output with 3000K White LED. M-RGBW power level wattage is 7.6W/ft.
- 3 UGR value noted is the maximum UGR (crosswise) with 930 LEDs at noted Power level.
- 4 Polar Plot and Isofootcandle diagram are applicable to part number noted; use Multiplier table(s) to approximate other Power / CCT options.


# 20 Linear Mini Z Cove

## Isoilluminance


**WG-20MZC-...-S-...-P1-935-OD-W**  
 10'-0" ceiling height  
 Satin opal diffuser

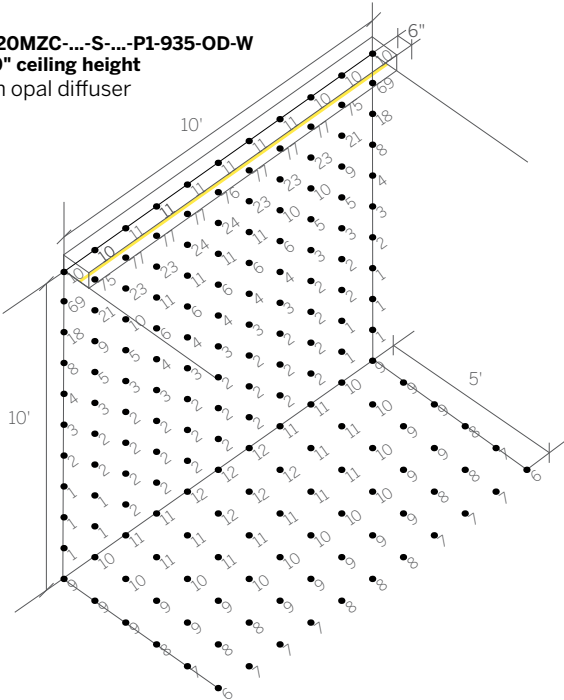


**WG-20MZC-...-S-...-P1-935-SD-W**  
 10'-0" ceiling height  
 Satin clear diffuser

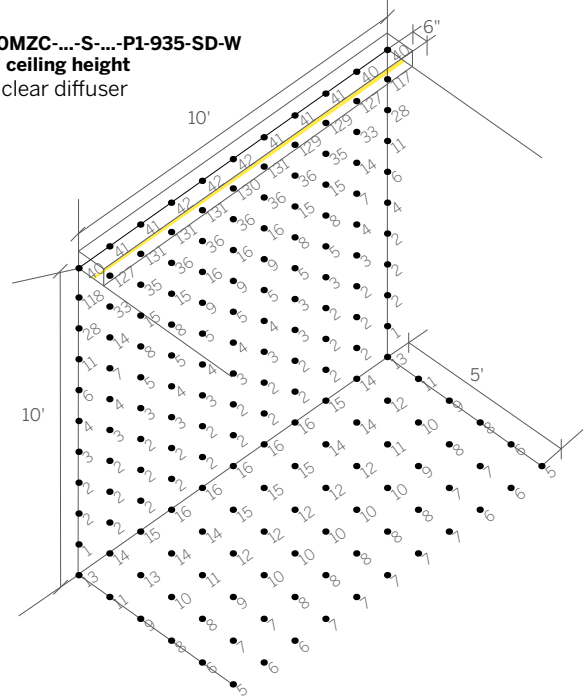

**WG-20MZC-...-S-...-P3-935-OD-W**  
 20'-0" ceiling height  
 Satin opal diffuser

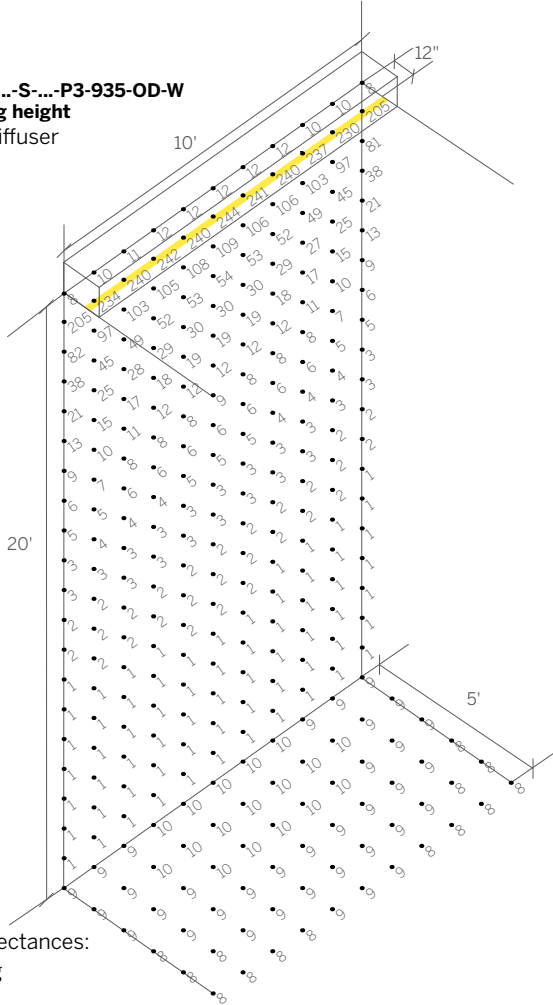

**WG-20MZC-...-S-...-P3-935-SD-W**  
 20'-0" ceiling height  
 Satin clear diffuser

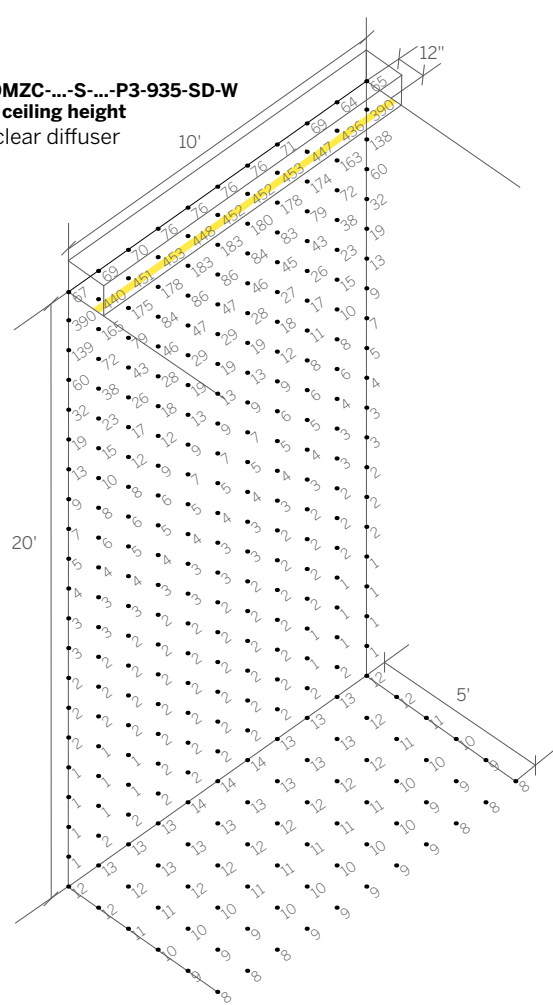

Surface reflectances:

80% Ceiling

50% Wall

20% Floor

Illuminance points are spaced 1'-0" on center.

Illuminance values are shown in units of foot-candles.