

Tour Pendant Rectangular Direct-Indirect

inter•lux



General: Tour is a comprehensive family of large pendants created to become integral part of any architectural design. Tour is available in Round, Square or Rectangular shape, with multiple sizes to choose from, and several distributions (Direct, Indirect, Direct/Indirect, Inside). Lobby spaces, conference rooms, retail stores are just some of the many applications Tour could be the perfect fit for.

Fixture Body: Powder Coated Aluminum 6060 (superior corrosion resistance).

Diffuser: Opaline UV resistant Polycarbonate.

Mounting: Suspension.

Dimensions/Weight: 65.2"x49.5" (29.76 lbs).

Driver: 120-277V. Integral inside canopy (0-10V Dimming), or Remote (0-10V Dimming or Non-Dim).

Operation: Constant Voltage, 24V DC (CV). Dual circuit provided to turn on down and up separately.

Wattages Down/Up: 85W/17W.

Suspension Cable Length: Max 196.9".

IP rating: IP40. Fixture is protected against solid objects greater than 0.04".

ETL Certification: ETL, dry location


Optics: Fixed, Direct/Indirect (Down/Up Emission). General Illumination.

Color temperatures: 3000K – 3500K – 4000K.

CRI: 80+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

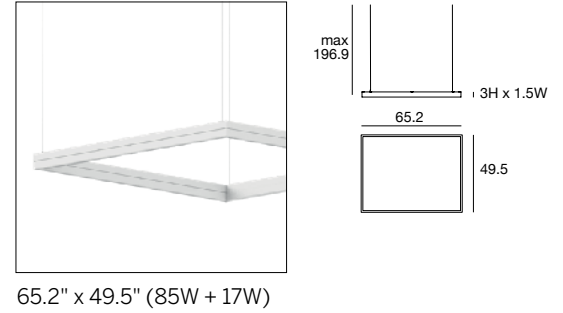

65.2" x 49.5" (85W + 17W)

Delivered Lumens*	65.2" x 49.5"
GE	4184 + 837

*Values shown for 3000K

Ordering Information							
TOU		DIIN	65x50	102 CV		GE	
Product	Trim/Finish	Type	Diameter/Size	Wattage/Operation	Color Temp	Optic	+ Fixing & Driver (Required) ¹
TOU = Tour	REWH = Rectangular White REBL = Rectangular Black	DIIN = Direct + Indirect Distribution	65x50 = 65.2" x 49.5"	102 CV = 85W + 17W / Remote Constant Voltage 24VDC	30 = 3000K 35 = 3500K 40 = 4000K	GE = General Illumination	Remote Driver: ² E64270+OT96-D010 E64240+OT96-D010 Driver in Canopy: E64358 E64359


¹ See page 2

² 2 remote drivers required per fixture




Emissions range

Tour comes with three different emissions: direct, inside and direct-indirect. Three lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

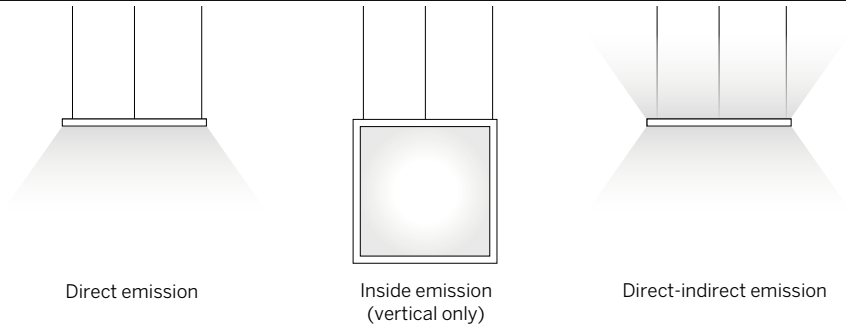


4-piece fixing kit (Remote Driver)





type	
White	E64270
Black	E64240

OT96-D010
Osram, 10% 0-10V dim,
96W, 24VDC, 120-277VAC,
supplied in a Dry location
enclosure

Note: 2 remote drivers
required per fixture

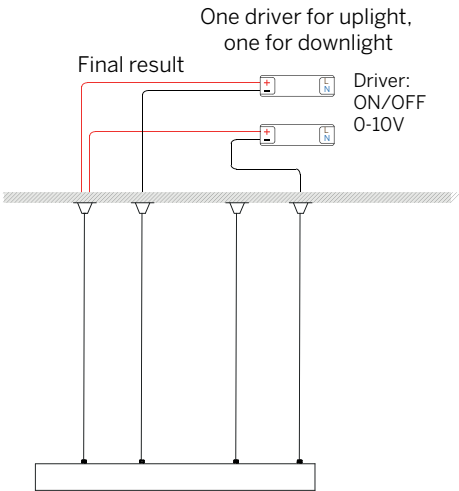

4-coupling point ceiling canopy for one-side emission for dual control (Integral 0-10V dimming driver in canopy)

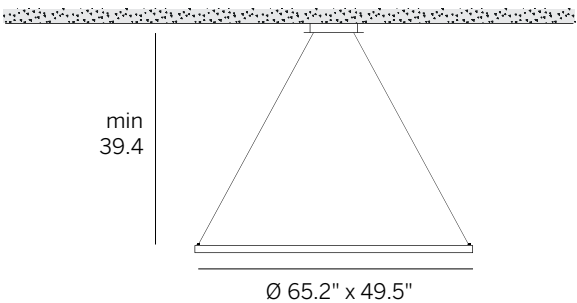

White	E64358
Black	E64359