

Tour Pendant Rectangular Direct



General: Tour is a comprehensive family of large pendants created to become integral part of any architectural design. Tour is available in Round, Square or Rectangular shape, with multiple sizes to choose from, and several distributions (Direct, Indirect, Direct/Indirect, Inside). Lobby spaces, conference rooms, retail stores are just some of the many applications Tour could be the perfect fit for.

Fixture Body: Powder Coated Aluminum 6060 (superior corrosion resistance).

Diffuser: Opaline UV resistant Polycarbonate.

Mounting: Suspension.

Dimensions/Weight: 65.2"x49.5" (15.43 lbs).

Driver: 120-277V. Integral inside canopy (0-10V Dimming), or Remote (0-10V Dimming or Non-Dim).

Operation: Constant Voltage, 24V DC (CV).

Wattages: 85W.

Power Over Suspension Cable: Max 196.9" length.

IP rating: IP40. Fixture is protected against solid objects greater than 0.04".

ETL Certification: ETL, dry location


Optics: Fixed, Direct (Down Emission). General Illumination.

Color temperatures: 3000K – 3500K – 4000K.

CRI: 80+

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.

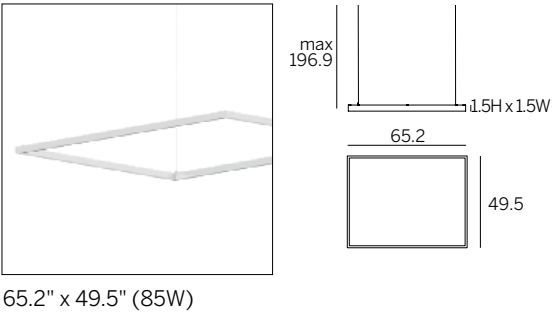

Delivered Lumens*		65.2" x 49.5"
GE		4161

*Values shown for 3000K


Ordering Information							
TOU		DIR	65x50	85 CV		GE	
Product	Trim/Finish	Type	Diameter/Size	Wattage/Operation	Color Temp	Optic	+ Fixing & Driver (Required) ¹
TOU = Tour	REWH = Rectangular White REBL = Rectangular Black	DIR = Direct Distribution (Down)	65x50 = 65.2" x 49.5"	85 CV = 85W /Remote Constant Voltage 24VDC	30 = 3000K 35 = 3500K 40 = 4000K	GE = General Illumination	Remote Driver: ² E64270+OT96-D010 E64240+OT96-D010 Driver in Canopy: E64368 E64369

¹ See page 2
² 2 remote drivers required per fixture




Emissions range


Tour comes with three different emissions: direct, inside and direct-indirect. Three lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.



Direct emission




Inside emission
(vertical only)



Direct-indirect emission

4-piece fixing kit (Remote Driver)



type

White E64270


Black E64240

OT96-D010

Osram, 10% 0-10V dim,
96W, 24VDC, 120-277VAC,
supplied in a Dry location
enclosure



Note: 2 remote drivers
required per fixture

Final result

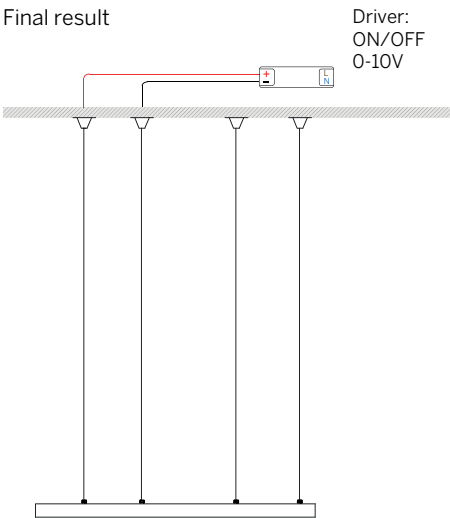

Driver:
ON/OFF
0-10V

4-coupling point ceiling canopy for one-side emission (Integral 0-10V dimming driver in canopy)

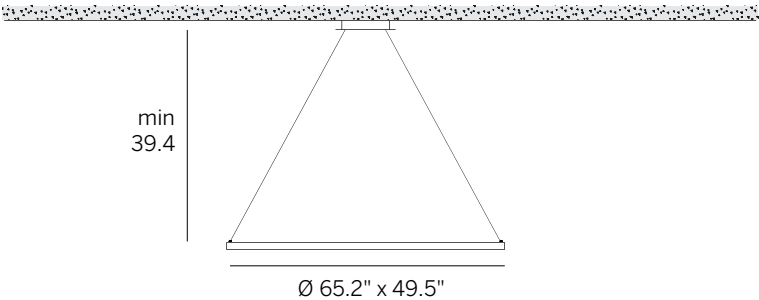

White E64368

Black E64369