



ProTools 60 Linear Wall Graze Recessed



An extremely low brightness perimeter lighting system that delivers a narrow sheet of light to a feature wall from above the finished ceiling – integrated with the architecture to otherwise minimize intrusion to the space.

Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts, louvers and lenses Standard and tailored lengths including corner configurations <i>Soft Graze</i> adds 1" - 3" additional set-off for less dramatic graze Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom
Integration	Fixation into gypsum, hard ceilings and all grid ceiling types Finished wall continues past the ceiling line
Distribution	Wall Graze and <i>Soft Graze</i>
LED	Static White, 2700K - 4000K, 3 W - 15 W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 3 W - 15 W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Optic	RLW/RLB - recessed louver white (W) or black (B)   extreme cutoff REO - Recessed elliptical optic - high efficiency graze
Reflector	White: high efficiency (standard with RLW) Black: no brightness (standard with RLB) Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location
Voltages	120-277VAC

technical  
information

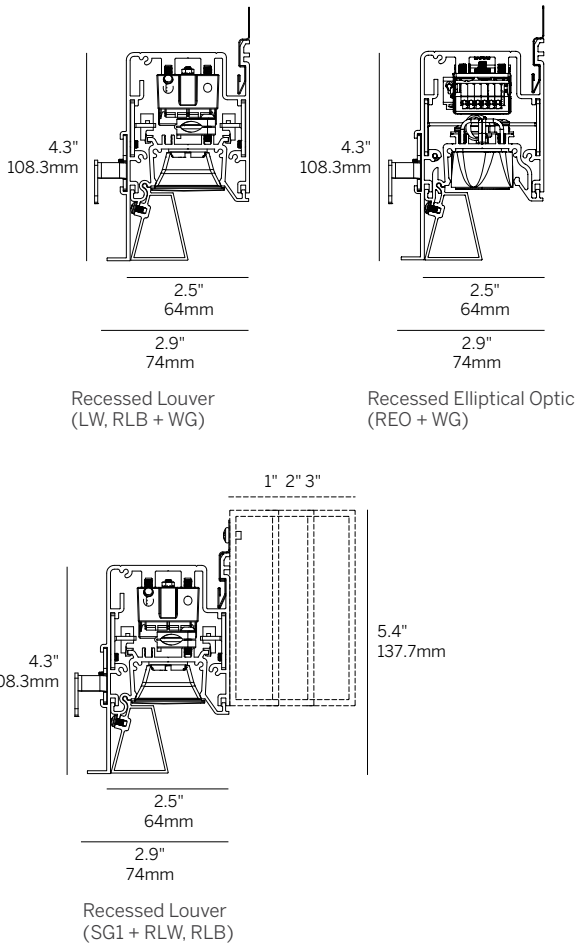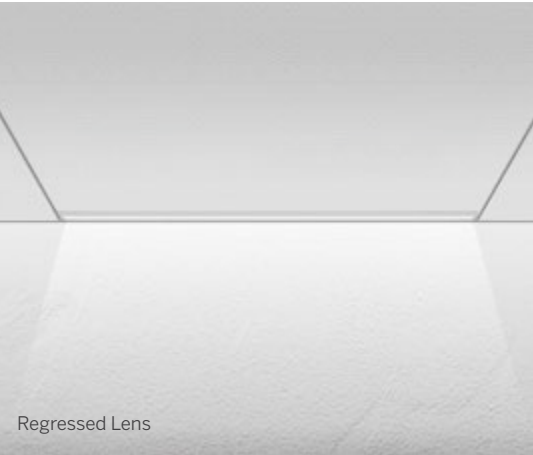

ProTools 60 Linear Wall Graze Recessed

Model	Fixation	Pattern	Length <sup>2</sup>	CRI/ CCT	Optic <sup>3</sup>	Beam	Power <sup>4</sup>	Driver <sup>5</sup>	Housing Finish	Options
WG-60PTLWG WG-60PTLSG1 WG-60PTLSG2 WG-60PTLSG3	RPT RBT RGT9 RGT15	S PI <sup>1</sup> PO <sup>1</sup>	24 48 96 XX <sup>3</sup>	927 930 935 940 TW1840 TW2765	RLW RLB REO	WG	P1 P2 P3 P4	E1 L1 D2DT6 D2DT8	W (std) B S F	AWNRF BT CP EM NYC TF

- Model**

  - WG-60PTLWG = ProTools 60 Linear Wall Graze
  - WG-60PTLSG1 = ProTools 60 Linear *Soft Graze* 1" extension
  - WG-60PTLSG2 = ProTools 60 Linear *Soft Graze* 2" extension
  - WG-60PTLSG3 = ProTools 60 Linear *Soft Graze* 3" extension

**Fixation**

  - RPT = Recessed plaster trim
  - RBT = Recessed trim for hard ceiling
  - RGT9 = Recessed trim for 9/16" grid
  - RGT15 = Recessed trim for 15/16" grid

**Pattern**

  - S = Straight run
  - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane<sup>1</sup>
  - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane<sup>1</sup>

**Length<sup>2</sup>**

  - 24 = 24"
  - 48 = 48"
  - 96 = 96"
  - XX = Specify inches to the nearest 0.25"<sup>3</sup>

**CRI / CCT** (90+ CRI minimum)

  - 927 = 2700K
  - 930 = 3000K
  - 935 = 3500K
  - 940 = 4000K
  - TW1840 = Tunable white 1800K - 4000K
  - TW2765 = Tunable white 2700K - 6500K

**Optic<sup>3</sup>**

  - RLW = Recessed louver white (supplied with white reflectors standard)
  - RLB = Recessed louver black (supplied with black reflectors only)
  - REO = Recessed elliptical optic
- Beam**

  - WG = Wall Graze

**Power<sup>4</sup>**

  - P1 = 3 W/ft
  - P2 = 6 W/ft
  - P3 = 10 W/ft
  - P4 = 15 W/ft

**Driver (integral)<sup>5</sup>**




  - E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
  - L1 = Lutron 1% dimming, Ecosystem (120-277V)
  - D2DT6 = DALI-2 (DT6) for Static White, 0.1% dimming (120-277V)
  - D2DT8 = DALI-2 (DT8) for Tunable White 0.1% dimming (120-277V) [TW only]

**Housing / Trim Finish (Includes kick reflector)**

  - W = White, 15% gloss, RAL 9003 (standard)
  - B = Black, 15% gloss, RAL 9005
  - S = Silver, 15% gloss, RAL 9006
  - F = Custom finished trim, specify RAL

**Options**

  - AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
  - BT = Wireless CAS – Casambi (remote only, specify with E1, D2DT6 or D2DT8)
  - CP = Chicago Plenum Rated
  - EM = Emergency LED driver (remote)
  - NYC = 6' whip per run
  - TF = Top feed

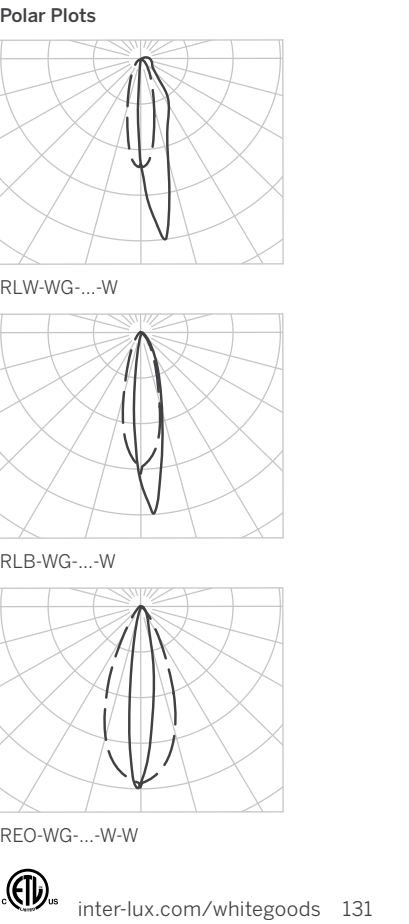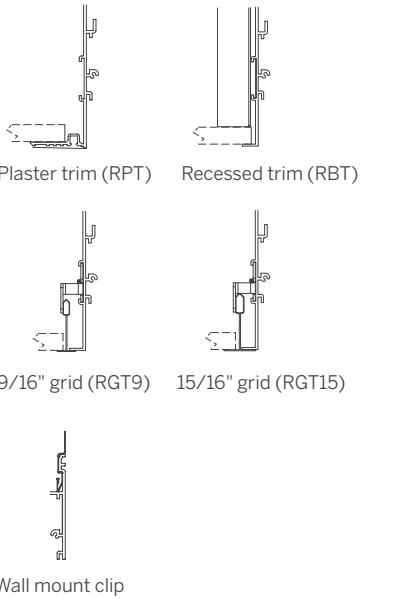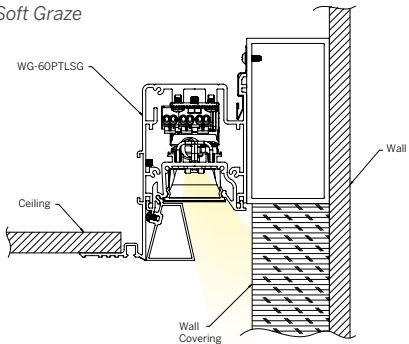

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- See pattern spec sheet.
  - Individual fixture lengths less than 2' may require remote driver.
  - Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 12" increments for continuous light. Louver supplied in 12" increments, balance of the run will have recessed blank covers on ends.
  - Refer to specsheet for delivered lumen data for all product configurations.
  - See power supply page for details.