


ORMA **VAST RANGE** Orma is a complete family of recessed Orma has been conceived with a unique luminaires with compact dimensions made versatility of application, offering the of robust and reliable materials, with high designer a wide range of possible degrees of protection: temporary IK10 and IP68, ideal for tight installation spaces. combinations of shapes, finishes and optics. Whether flush, all-glass or metal, In addition to the round models, the Orma Orma fits into any environment, even the range is enriched with the brand new square shape. The flush-mounted steel flange is completed by the version with a flush-mounted all-glass front and path most unusual, thanks to a choice of eight diameters and an innovative square flange. In terms of technical lighting, new optics packages are introduced: Spot, Flood, Wide Flood, Extra Wide Flood, General, Elliptic, Adjustable Wall Wash optics. marker with concentric optics. The Adjustable versions can be swivelled quickly and easily by turning the screw with a flat screwdriver, without having to open the lamp body and thus risking compromising the watertightness. 2 Orma

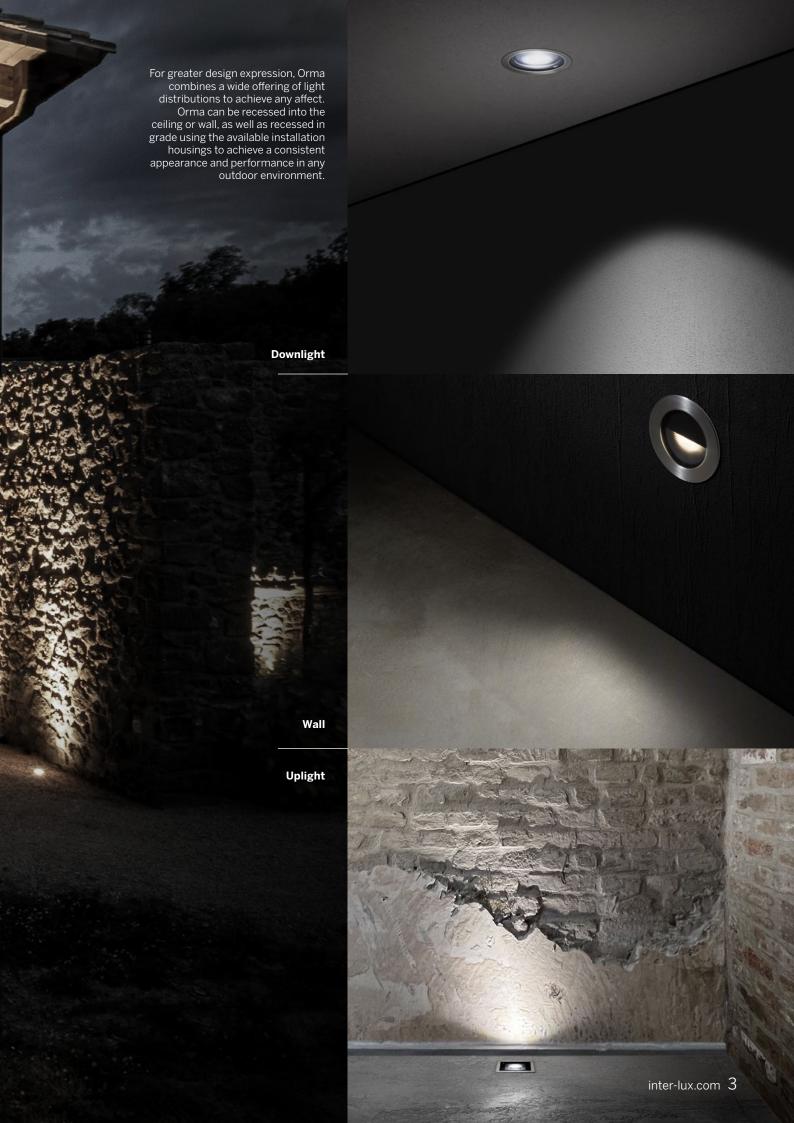

UPLIGHTS OR DOWNLIGHTS, SIMPLY CHOOSE WHERE TO INSTALL THEM

All the technology combined in 2 inches

An uplight with extremely compact dimensions, with a height of up to 2 inches. Orma is designed for easy installation.

_ z Incn _



Orma Adjiustable

Adding the benefits of adjustability to Orma allows the designer to finely adjust the effect. The adjustment of -20°/+20° is made with a flat-blade screwdriver on the exterior of the housing, maintaining the integrity of a sealed optical compartment.






Locking system

The properly adjusted luminaire is then locked in place withing the installation housing, preventing the need to re-aim for the perfect effect.





Trim options



Semi-Flush Trim



Flush Trim



Trimless













Blade Optics

The Blade optics let you light window wells, arches and architraves, emphasizing the architecture and its details. The entirely recess-mounted luminaire lets the window open and close without interference. The light beam is very narrow laterally and then opens up to almost 180° at the front, enhancing the inner face of the openings without glare or light pollution.









Concentric Optics

An exclusive design, recess mounted path marker, flush with the pavement, is capable of creating beautiful effects and giving the paths correct directionality with a sturdy structure capable of withstanding traffic weighing up to 4400 lbs. The family includes four diameters: 1.6", 2.2", 3.4", 5.0".













Adjustable Wall Washer Optics

Optics conceived for wall and floor recessed installation, they allow the design of perfectly marked and visible luminous paths. The WallWash optics allow the luminous beam to be directed to the intended path without light above the the 90 degree plane for maximum visual comfort. The easy adjustment can be made to fine tune the luminous beam.








Thanks to the tilting system built into the optics compartment, Orma Wall Wash is able to adapt to different installation heights, defining the diffusion of the light up the to 10 feet away from the source.

Product installed

Orma semi-flush Trim Optic: Adj. WW 3000K

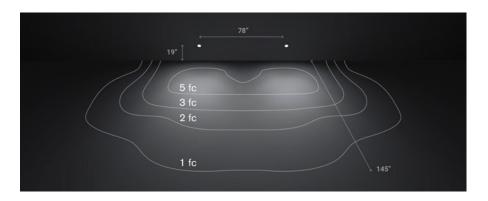

ORMA Round range







Remote

Remote

Remote

Remote

Remote

Remote











Remote

	Orma Trimless Flush Optics	Orma Trimless Flush Frosted	Orma Trim Optics	Orma Trim Optics RGBW	Orma Trim Frosted	Orma Trim Frosted RGBW	Orma Trim Adjustable Wall Washer
0.9"Ø	1W CC 1.5W CV	1W CC 1.5W CV	-	-	-	-	-
1.6"Ø	-	-	-	-	-	-	-
2.1-2.2"Ø	4W CC 5W CV	1W CC 1.5W CV	(Flush Trim) 4W CC 5W CV	-	(Flush Trim) 1W CC 1.5W CV	-	(Flush Trim) 4W CC 5W CV
2.5"Ø	-	-	(Semi-Flush) 4W CC 5W CV	-	(Semi-Flush) 1W CC 1.5W CV	-	(Semi-Flush) 4W CC 5W CV
3.3-3.4"Ø	8W CC 9W CV	2W CC 2.5W CV	(Flush Trim) 8W CC 9W CV	(Flush Trim) 8W CC	(Flush Trim) 2W CC 2.5W CV	(Flush Trim) 8W CC	(Flush Trim) 8W CC 9W CV
3.8"Ø	-	-	(Semi-Flush) 8W CC 9W CV	(Semi-Flush) 8W CC	(Semi-Flush) 2W CC 2.5W CV	(Semi-Flush) 8W CC	(Semi-Flush) 8W CC 9W CV
4.9-5.0"Ø	12W CC	4W CC 5W CV	(Flush Trim) 12W CC		(Flush Trim) 4W CC 5W CV	-	(Flush Trim) 12W CC
5.4"Ø	-	-	(Semi-Flush) 12W CC		(Semi-Flush) 4W CC 5W CV	-	(Semi-Flush) 12W CC
сст	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	RGBW - 3000K RGBW - 4000K	2700K 3000K 4000K	RGBW - 3000K RGBW - 4000K	2700K 3000K 4000K
Optic	Spot Flood Wide Flood Eliptical	General	Spot Flood Wide Flood Elliptical	Narrow Spot Spot Flood	General	General	Asymmetric
Adjustable	OR-TL-A	-	OR-FT-A OR-SFST-A OR-SFBT-A	-	-	-	-
Anti-glare filter	Honeycomb Darklight	-	Honeycomb Darklight	-	-	-	-
Finish	Glass/Alu	Glass/Alu	St. Steel/ Brass	St. Steel / Brass	St. Steel/ Brass	St. Steel/ Brass	St. Steel/ Brass

Driver

ORMA Square range















Orma Blade	Orma Concentric	Orma Ceiling		Orma Square Trimless Flush Optics	Orma Square Trimless Flush Frosted	Orma Square Semi-Flush Trim Optics	Orma Square Semi-Flush Trim Frosted
-	-	-	1.4" sq.	2W CC 2.5W CV	1W CC 1.5W CV	-	-
-	1.5W CV	-	2.4" sq.	4W CC 5W CV	1.5W CC 2W CV	1.5W CV	-
-	1W CC 1.5W CV	-	3.3" sq.		-	4W CC 5W CV	1.5W CC 2W CV
-	-	4W CC 5W CV	3.5" sq.	8W CC 9W CV	2W CC 2.5W CV	-	-
(Flush Trim) 8W CC 9W CV	2W CC 2.5W CV	-	4.4" sq.	-	-	8W CC 9W CV	2W CC 2.5W CV
(Semi-Flush) 8W CC 9W CV	-	8W CC 9W CV					
-	4W CC 5W CV	-					
-	-	12W CC					
2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	сст	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Radial	Rings	Spot Flood Wide Flood Elliptical	Optic	Spot Flood Wide Flood	General	Spot Flood Wide Flood	General
-	-	ORC-SFST-A ORC-SFBT-A	Adjustable	ORS-TL-A	-	ORS-SFST-A	-
-	-	Honeycomb Darklight	Anti-glare filter	Honeycomb	-	Honeycomb	-
St. Steel/ Brass	Black - White - Grey	St. Steel/ Brass	Finish	Glass/Alu	Glass/Alu	St. Steel/Alu	St. Steel/Alu
Remote	Remote	Remote	Driver	Remote	Remote	Remote	Remote



inter•lux

inter-lux.com