


1.5" ProTools Adjustable Round Recessed



Recessed Plaster Trim (RPT)




Recessed Bezel Trim (RBT)

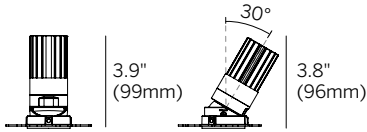



Ø1.6" (41mm)
Ø3.9" (91mm)

Plaster Trim (RPT)
Cutout: □ 2.1" (50mm)

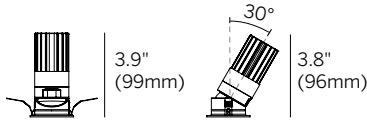

Ø1.6" (41mm)
Ø2" (51mm)

Bezel Trim (RBT)
Cutout: □ 1.8" (45mm)

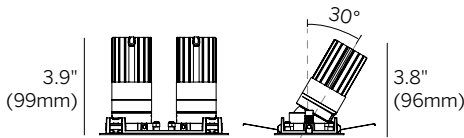

2.8" (70mm)
5.1" (130mm)
Twin Trim (TT)
Cutout: 1.4" x 4.7" (60 x 120mm)

Ordering Information										
Model	Fixation	Power ²	CRI	CCT ³	Driver ^{4,5}	Cover	Beam	Trim Finish	Housing ⁵	Options
WG-40RPTA		M	92			OA				
WG-40RPTA	RBT RPT TT ¹	M	92	27 30 35 40 WD	S1* S2* SPH* DO10* PEQ0* DALI*	OA	20 25 35 50	W (std) B S F	NC LP IC CP X ⁶	SOL ⁷ LSL ⁷ HL ⁷ DF EM

*Add 'R' for remote driver, ex. 'RS2'

Luminaire

- Part of a complete family of 1.5" aperture matching downlights.
- General illumination allows 6' spacing on 9' ceiling height for 15+FC maintained.
- Very small aperture, low brightness downlight for general and accent illumination.
- High lumen output and excellent color rendition for all applications.
- Multiple housing styles for mounting into all ceiling types.
- Very shallow ceiling depth required for both integral and remote drivers.
- L70 (TM21 Projected 85°C) = Static White 33,300 hours Warm Dim 55,000 hours.

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim
- TT = Twin Trim¹

Power²

- M = Mid Power, 9.1W @ 500mA

CRI

- 92 = 92 CRI

CCT (Mid)³

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Integral Driver NC / IC / CP Housings

Accessible Ceiling^{4,5}

- S1 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 12W
- S2 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 22W
- SPH = standard phase (2-wire) 10% dimming, 120V only, 12W
- DO10 = eldoLED 1% 0-10V dimming, 120-277V, 30W
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W
- DALI = eldoLED DALI-2 0.1% dimming, 120-277V, 20W

Remote Driver for NC / LP / IC / CP^{4,5}

- RS1 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 12W, for 1 fixture
- RS2 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 22W, for 1-2 fixtures
- RSPH = standard phase (2-wire) 10% dimming, 120V only, 12W, for 1 fixture
- RD010 = eldoLED 0.1% 0-10V dimming, 120-277V, 100W, for 1-8 fixtures
- RPEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W, for 1-2 fixtures
- RDALI = eldoLED DALI-2 0.1% dimming, 120-277V, 100W, for 1-4 fixtures

Cover

- OA = Open Aperture

Beam

- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

Trim Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Housing⁵

- NC = New Construction Housing (integral driver for accessible ceilings only)
- LP = Landing Pan (for remote driver)
- IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)
- CP = Chicago Plenum Housing (integral driver for accessible ceilings only)
- X = No Housing⁶

Options

- SOL = Solite Lens⁷
- LSL = Linear Spread Lens⁷
- HL = Honeycomb Louver⁷
- DF = Diffusing Film
- EM = Emergency LED battery backup (remote only)

- TT Twin Trim will be provided with (2) matching fixtures, unless specified otherwise.
- Wattage shown is for LED only, system wattage varies depending on driver selected.
- See photometric data sheet for delivered lumens.
- See driver information for details.
- Refer to Housings detail page for additional information.
- Fixture can be installed without housing.
- One accessory per fixture.

