



# 1.5" ProTools Downlight

## Round Suspended Cylinder


### Very Small Aperture Suspended Cylinder

- 2" diameter suspended luminaire for general and accent illumination.
- Part of a complete family of 1.5" aperture matching downlights.
- Very small aperture, low brightness downlight for general and accent illumination.
- High lumen output and excellent color rendition for all applications.
- 72" standard length suspension, field adjusted.
- Very shallow ceiling depth required for remote drivers.
- Extremely low brightness downlight with UGR < 16.

<b>Luminaire</b>	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Round open aperture with minimal ceiling interruption and regressed optical chamber
<b>Suspension</b>	72" standard length suspension, field adjusted 2" dia. surface mount, or 5" dia. for 4" j-box
<b>LED</b>	92+ CRI Mid Power 2700K, 3000K, 3500K, 4000K, Warm Dim (1800K-3000K)
<b>Beam</b>	20°, 25°, 35°, 50°
<b>Driver</b>	Remote drivers for all dimming and non-dimming applications 0-10V, Phase, Lutron driver options
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location

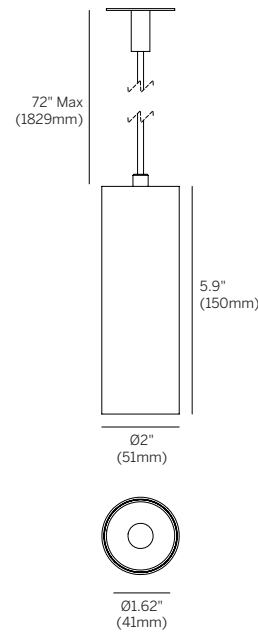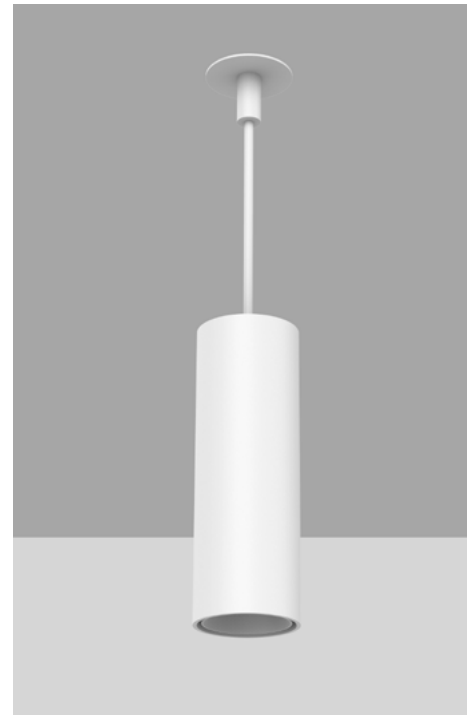

### Canopy



2" dia  
5" dia for 4" j-box

# 1.5" ProTools Downlight

## Round Suspended Cylinder

Model	Suspension	Canopy	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Beam	Trim Finish	Housing Finish	Options
WG-40RPTDL	S	2 5	M	92	27 30 35 40 WD	RSPH RD010 RPEQ0	OA	20 25 35 50	W (std) B S F	W (std) B S F	HL MPL EM

### Luminaire

- 2" diameter suspended luminaire for general and accent illumination.
- Small aperture, very low brightness downlight.
- High lumen output and excellent color rendition for all applications.
- Minimal ceiling escutcheon.
- Remote driver for 1 or multiple fixtures.

### Suspension

- S = Suspension, 72" standard length, field adjusted

### Canopy

- 2 = 2" dia. surface mount
- 5 = 5" dia. for 4" j-box

### Power<sup>1</sup>

- M = Mid Power, 9.1W @ 500mA

### CRI

- 92 = 92 CRI

### CCT (Mid)<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

### Remote Driver<sup>3</sup>

- RSPH = standard phase (2-wire) 10% dimming, 120V only, 12W, for 1 fixture
- RD010 = eldoLED 0.1% 0-10V dimming, 120-277V, 100W, for 1-8 fixtures
- RPEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W, for 1-2 fixtures

### Cover

- OA = Open Aperture

### Beam

- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

### Trim Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Housing Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Options

- HL = Honeycomb louver
- MPL = Micro-prismatic lens
- EM = Emergency LED battery backup (remote only)

Whitegoods reserves the right to change any information without prior notice.

### Notes

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.

technical information