



1.5" ProTools Downlight

Round Suspended Cylinder


Very Small Aperture Suspended Cylinder

- 2" diameter suspended luminaire for general and accent illumination.
- Part of a complete family of 1.5" aperture matching downlights.
- Very small aperture, low brightness downlight for general and accent illumination.
- High lumen output and excellent color rendition for all applications.
- 72" standard length suspension, field adjusted.
- Very shallow ceiling depth required for remote drivers.
- Extremely low brightness downlight with UGR < 16.

Luminaire	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Round open aperture with minimal ceiling interruption and regressed optical chamber
Suspension	72" standard length suspension, field adjusted 2" dia. surface mount, or 5" dia. for 4" j-box
LED	92+ CRI Mid Power 2700K, 3000K, 3500K, 4000K, Warm Dim (1800K-3000K)
Beam	20°, 25°, 35°, 50°
Driver	Remote drivers for all dimming and non-dimming applications 0-10V, Phase, Lutron driver options
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location

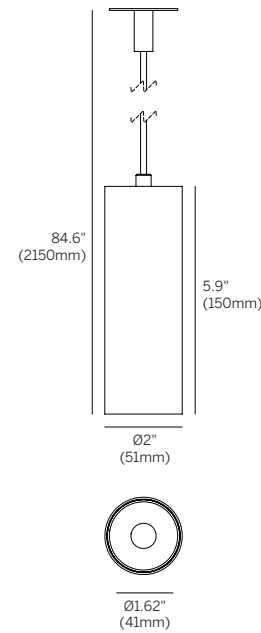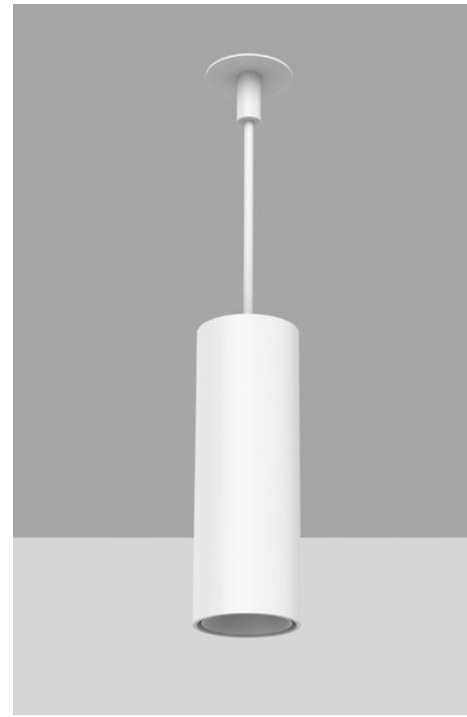

Canopy



2" dia
5" dia for
4" j-box

1.5" ProTools Downlight

Round Suspended Cylinder

Model	Suspension	Canopy	Power ¹	CRI	CCT ²	Driver ³	Cover	Beam	Trim Finish	Housing Finish	Options
WG-40RPTDL	S	2 5	M	92	27 30 35 40 WD	RSPH RD010 RPEQ0	OA	20 25 35 50	W (std) B S F	W (std) B S F	SOL ⁴ LSL ⁴ HL ⁴ DF EM

Luminaire

- 2" diameter suspended luminaire for general and accent illumination.
- Small aperture, very low brightness downlight.
- High lumen output and excellent color rendition for all applications.
- Minimal ceiling escutcheon.
- Remote driver for 1 or multiple fixtures.

Suspension

- S = Suspension, 72" standard length, field adjusted

Canopy

- 2 = 2" dia. surface mount
- 5 = 5" dia. for 4" j-box

Power¹

- M = Mid Power, 9.1W @ 500mA

CRI

- 92 = 92 CRI

CCT (Mid)²

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Remote Driver³

- RSPH = standard phase (2-wire) 10% dimming, 120V only, 12W, for 1 fixture
- RD010 = eldoLED 0.1% 0-10V dimming, 120-277V, 100W, for 1-8 fixtures
- RPEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W, for 1-2 fixtures

Cover

- OA = Open Aperture

Beam

- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

Trim Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Housing Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Options

- SOL = Solite Lens⁴
- LSL = Linear Spread Lens⁴
- HL = Honeycomb Louver⁴
- DF = Diffusing Film
- EM = Emergency LED battery backup (remote only)

Whitegoods reserves the right to change any information without prior notice.

Notes

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. See driver information for details.
4. One accessory per fixture.

technical
information