

# 1.5" ProTools Downlight

## Round Suspended Cylinder



Ordering Information											
WG-40RPTDL	S		M	92			OA				
Model	Suspension	Canopy	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3</sup>	Cover	Beam	Trim Finish	Housing Finish	Options
WG-40RPTDL	S	2 5	M	92	27 30 35 40 WD	RSPH RD010 RPEQO	OA	20 25 35 50	W (std) B S F	W (std) B S F	SOL <sup>4</sup> LSL <sup>4</sup> HL <sup>4</sup> DF EM

### Luminaire

- 2" diameter suspended luminaire for general and accent illumination.
- Small aperture, very low brightness downlight.
- High lumen output and excellent color rendition for all applications.
- Minimal ceiling escutcheon.
- Remote driver for 1 or multiple fixtures.

### Suspension

- S = Suspension, 72" standard length, field adjusted

### Canopy

- 2" = 2" dia. surface mount
- 5" = 5" dia. for 4" j-box

### Power<sup>1</sup>

- M = Mid Power, 9.1W @ 500mA

### CRI

- 92 = 92 CRI

### CCT (Mid)<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

### Remote Driver<sup>3</sup>

- RSPH = standard phase (2-wire) 10% dimming, 120V only, 12W, for 1 fixture
- RD010 = eldoLED 0.1% 0-10V dimming, 120-277V, 100W, for 1-8 fixtures
- RPEQO = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W, for 1-2 fixtures

### Cover

- OA = Open Aperture

### Beam

- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

### Trim Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code


### Housing Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code


### Options

- SOL = Solite Lens<sup>4</sup>
- LSL = Linear Spread Lens<sup>4</sup>
- HL = Honeycomb Louver<sup>4</sup>
- DF = Diffusing Film
- EM = Emergency LED battery backup (remote only)

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. See driver information page for details.
4. One accessory per fixture.

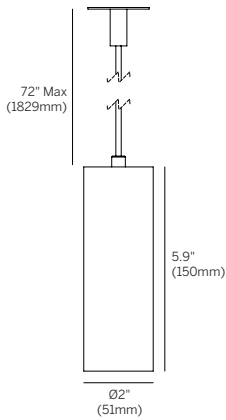


Canopy



2" dia

5" dia for 4" j-box



SOL LSL HL DF