


1.5" ProTools Downlight Square Recessed



1.5” square aperture recessed downlight with 0.8” square light aperture regressed 0.5” from ceiling plane.

Luminaire	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation
Cover	SRC - Square Recessed Cone for low brightness, general illumination with angled cone
LED	Constant Current, 92+ CRI (standard), 2-Step MacAdam Mid output (delivers up to 83 lumens per watt) 2700K, 3000K, 3500K, 4000K Warm Dim (1800 - 3000K) L70 (TM21 Projected 85° C) Static White = 33,300 hours, WD = 55,000 hours
Beam	20°, 25°, 35°, 50°
Driver	Integral and remote drivers for all dimming and non-dimming applications Non-Dim, 0-10V, Phase, Lutron, DALI driver options POE driver compatibility
Installation Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling CP - Chicago Plenum X - No Housing (Optional)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry, damp (WL Wet Location optional), CE

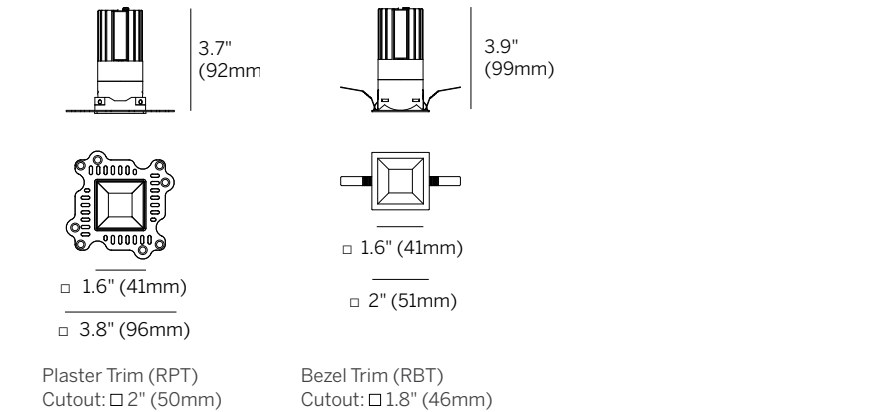

Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

1.5" ProTools Downlight Square Recessed

Model	Fixation	Power ¹	CRI	CCT ²	Driver ^{3,4}	Cover	Lens	Beam	Trim Finish	Housing ⁴	Options
WG-40SPTDL	RBT RPT	M	92	27 30 35 40 WD	S010* D010* SPH* PEQ0* D2S* X	SRC	OA ⁵ SOL ⁵ LSL ⁵ HL ⁵ DF	20 25 35 50	W (std) B S F	LP NC IC CP X	WL TM EM AWNRF

*Add 'R' for remote driver, ex. 'RS2'

Model

- WG-40SPTDL = 1.5" ProTools Downlight Square Recessed

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power¹

- M = Mid Power, 9.1W @ 500mA

CRI

- 92 = 92 CRI

CCT (Mid)²

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Integral Driver NC / IC / CP Housings Accessible Ceiling^{3,4}

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W)

Remote Driver for NC / LP / IC / CP^{3,4}

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RSPH = Remote phase (2-wire) 3% dimming, 120V only (20W)
- RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- RD2S = Remote DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

Cover

- SRC = Square Recessed Cone

Lens

- OA = Open Aperture (clear lens provided stadard)⁵
- SOL = Solite Lens⁵
- LSL = Linear Spread Lens⁵
- HL = Honeycomb Louver⁵
- DF = Diffusing Film

Beam

- 20 = 20° Beam Angle
- 25 = 25° Beam Angle
- 35 = 35° Beam Angle
- 50 = 50° Beam Angle

Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Housing (optional)⁴

- LP = Landing Pan (for remote driver)
- NC = New Construction Housing (integral driver for accessible ceilings only)
- IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)
- CP = Chicago Plenum Housing (integral driver for accessible ceilings only)
- X = No Housing

Options

- WL = Wet Location
- TM = Thin Metal Ceiling Clip
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

Whitegoods reserves the right to change any information without prior notice.

Notes

- Wattage shown does not include power supplies / drivers.
- See photometric data sheet for delivered lumens.
- See driver information page for details.
- See housings pages for detail.
- One accessory per fixture.