


1.5" ProTools Wall Wash Square Recessed



1.5" square aperture recessed wall wash with 1.4" half moon light aperture and internal reflector system.

Luminaire	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation
Cover	SWW - Square Wall Wash with flush room-side cutoff and internal scoop reflector
LED	Constant Current, 92+ CRI (standard), 2-Step MacAdam Mid output (delivers up to 47 lumens per watt) 2700K, 3000K, 3500K, 4000K Warm Dim (1800 - 3000K) L70 (TM21 Projected 85° C) Static White = 33,300 hours, WD = 55,000 hours
Beam	Wall Wash
Driver	Integral and remote drivers for all dimming and non-dimming applications Non-Dim, 0-10V, Phase, Lutron, DALI driver options POE driver compatibility
Installation Housing	LP - Landing Pan NC - New Construction IC - Insulated Ceiling CP - Chicago Plenum X - No Housing (Optional)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry, damp (WL Wet Location optional), CE

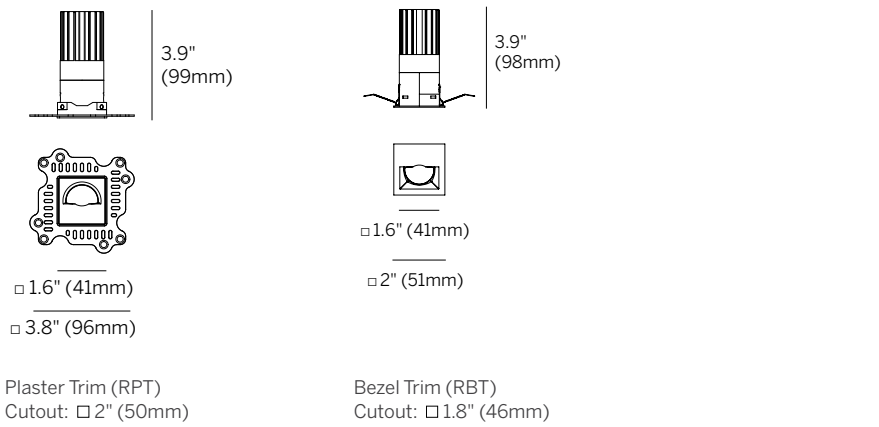

Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

1.5" ProTools Wall Wash Square Recessed

Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3,4</sup>	Cover	Lens	Beam	Trim Finish	Housing <sup>4</sup>	Options
WG-40SPTWW	RBT RPT	M	92	27 30 35 40 WD	S010* D010* SPH* PEQ0* D2S* X	SWW	WWL	WW	W (std) B S F	LP NC IC CP X	WL TM EM AWNRF

\*Add 'R' for remote driver, ex. 'RS010'

<b>Model</b> <ul style="list-style-type: none"><li>WG-40SPTWW = 1.5" ProTools Wall Wash Square Recessed</li></ul>	<b>Cover</b> <ul style="list-style-type: none"><li>SWW = Square Wall Wash</li></ul>
<b>Fixation</b> <ul style="list-style-type: none"><li>RPT = Recessed Plaster Trim</li><li>RBT = Recessed Bezel Trim</li></ul>	<b>Lens</b> <ul style="list-style-type: none"><li>WWL = Wall Wash Spread Lens</li></ul>
<b>Power<sup>1</sup></b> <ul style="list-style-type: none"><li>M = Mid Power, 9.1W @ 500mA</li></ul>	<b>Beam</b> <ul style="list-style-type: none"><li>WW = Wall Wash</li></ul>
<b>CRI</b> <ul style="list-style-type: none"><li>92 = 92 CRI</li></ul>	<b>Trim Finish</b> <ul style="list-style-type: none"><li>W = White, 15% gloss, RAL 9003 (standard)</li><li>B = Black, 15% gloss, RAL 9005</li><li>S = Silver, 15% gloss, RAL 9006</li><li>F = Custom finish, specify RAL code</li></ul>
<b>CCT<sup>2</sup></b> <ul style="list-style-type: none"><li>27 = 2700K</li><li>30 = 3000K</li><li>35 = 3500K</li><li>40 = 4000K</li><li>WD = Warm Dimming 1800 - 3000K</li></ul>	<b>Housing (optional)<sup>4</sup></b> <ul style="list-style-type: none"><li>LP = Landing Pan (for remote driver)</li><li>NC = New Construction Housing (integral driver for accessible ceilings only)</li><li>IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)</li><li>CP = Chicago Plenum Housing (integral driver for accessible ceilings only)</li><li>X = No Housing</li></ul>
<b>Integral Driver NC / IC / CP Housings Accessible Ceiling<sup>3,4</sup></b> <ul style="list-style-type: none"><li>S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)</li><li>D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)</li><li>SPH = Phase (2-wire) 3% dimming, 120V only (20W)</li><li>PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)</li><li>D2S = DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W)</li></ul>	<b>Options</b> <ul style="list-style-type: none"><li>WL = Wet location</li><li>TM = Thin Metal Ceiling Clip</li><li>EM = Emergency (remote only)</li><li>AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)</li></ul>
<b>Remote Driver for NC / LP / IC / CP<sup>3,4</sup></b> <ul style="list-style-type: none"><li>RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)</li><li>RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)</li><li>RSPH = Remote phase (2-wire) 3% dimming, 120V only (20W)</li><li>RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)</li><li>RD2S = Remote DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)</li><li>X = No Driver</li></ul>	

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- Wattage shown does not include power supplies / drivers.
  - See photometric data sheet for delivered lumens.
  - See driver information page for details.
  - See housings pages for details.

