



1.5" ProTools Wallwash Round Recessed

WG-40RPTWW-...-RWW-WW-W		Delivered Lumens
		POWER
		M [9.1W]
CRI-CCT ¹	92-27	380
	92-30	398
	92-35	416
	92-40	428
	92-WD	371



Beam Angle (0-180) = 27.1
Beam Angle (90-270) = 34.0

**ISOILLUMINANCE DIAGRAM - MID POWER 3500K RWW
WG-40RPTWW-...-M-92-35-...-RWW-WW-W^{1,2}**

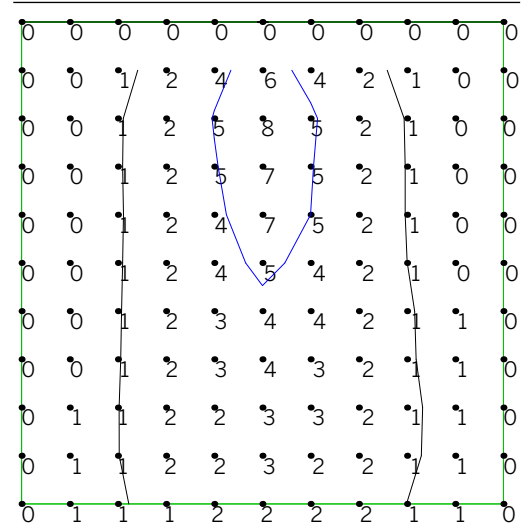

Value [Fc]	Color	Value [Fc]	Color
1	Black	20	Red
5	Blue	25	Magenta
10	Green	30	Dark Blue
15	Cyan	35	Dark Green

CRI-CCT MULTIPLIER				
92-27	92-30	92-35	92-40	92-WD
0.91	0.96	1.00	1.03	0.89

- 1 Polar Plot and Cone of Light are applicable to part number noted; use Multiplier table(s) to approximate other CRI-CCT and Power options.
- 2 Beam Diameter indicates on center spacing required to maintain Illuminance at Mounting Height.