

1.5" ProTools Wallwash

Round Recessed



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

Ordering Information

Model	Fixation	Power ²	CRI	CCT ³	Driver ^{4,5}	Cover	Beam	Trim Finish	Housing ⁵	Options
WG-40RPTWW		M	92			RWW	WW			
WG-40RPTWW	RBT RPT TT ¹	M	92	27 30 35 40 WD	S1* S2* SPH* D010* PEQO* DALI*	RWW	WW	W (std) B S F	NC LP IC CP X ⁶	WL EM

*Add 'R' for remote driver, ex. 'RS2'

Luminaire

- Part of a complete family of 1.5" aperture matching downlights.
- Small aperture, low brightness wallwash.
- Even illumination on 9' wall height with 18"-24" setback and 24"-36" spacing.
- High lumen output and excellent color rendition.
- Multiple housing styles for all mounting applications.
- Very shallow ceiling depth.
- L70 (TM21 Projected 85°C) = Static White 33,300 hours Warm Dim 55,000 hours.

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim
- TT = Twin Trim¹

Power²

- M = Mid Power, 9.1W @ 500mA

CRI

- 92 = 92 CRI

CCT (Mid)³

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Integral Driver NC / IC / CP Housings

Accessible Ceiling^{4,5}

- S1 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 12W
- S2 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 22W
- SPH = standard phase (2-wire) 10% dimming, 120V only, 12W
- D010 = eldoLED 1% 0-10V dimming, 120-277V, 30W
- PEQO = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W
- DALI = eldoLED DALI-2 0.1% dimming, 120-277V, 20W

Remote Driver for NC / LP / IC / CP^{4,5}

- RS1 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 12W, for 1 fixture
- RS2 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 22W, for 1-2 fixtures
- RSPH = standard phase (2-wire) 10% dimming, 120V only, 12W, for 1 fixture
- RD010 = eldoLED 0.1% 0-10V dimming, 120-277V, 100W, for 1-8 fixtures
- RPEQO = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W, for 1-2 fixtures
- RDALI = eldoLED DALI-2 0.1% dimming, 120-277V, 100W, for 1-4 fixtures

Cover

- RWW = Round Wallwash

Beam

- WW = Wallwash

Trim Finish

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code


Housing⁵

- NC = New Construction Housing (integral driver for accessible ceilings only)
- LP = Landing Pan (for remote driver)
- IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)
- CP = Chicago Plenum Housing (integral driver for accessible ceilings only)
- X = No Housing⁶

Options


- WL = Wet location
- EM = Emergency LED battery backup (remote only)

1. TT Twin Trim will be provided with (2) matching fixtures, unless specified otherwise.
2. Wattage shown is for LED only, system wattage varies depending on driver selected.
3. See photometric data sheet for delivered lumens.
4. See driver information for details.
5. Refer to Housings detail page for additional information.
6. Fixture can be installed without housing.

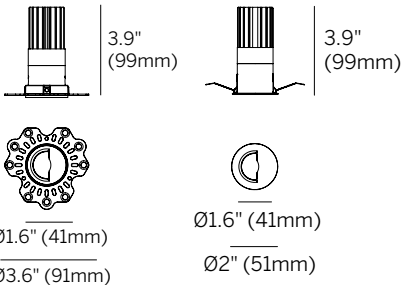

Plaster Trim (RPT)
Cutout: Ø2.1" (54mm)

Bezel Trim (RBT)
Cutout: Ø1.8" (45mm)



Twin Trim (TT)
Cutout: 1.4" x 4.7" (60 x 120mm)