

1.5" ProTools Wallwash

Square Recessed


inter•lux



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

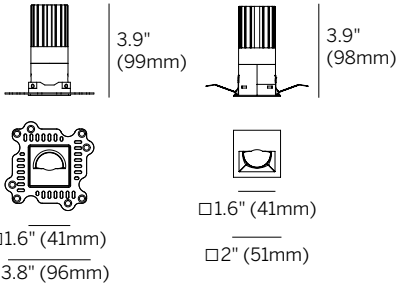

Plaster Trim (RPT)
Cutout: □ 2" (50mm)

Bezel Trim (RBT)
Cutout: □ 1.8" (46mm)

Ordering Information

WG-40SPTWW		M	92			SWW	WW			
Model	Fixation	Power ¹	CRI	CCT ²	Driver ^{3,4}	Cover	Beam	Trim Finish	Housing ⁴	Options
WG-40SPTWW	RBT RPT	M	92	27 30 35 40 WD	S010* D010* SPH* PEQ0* D2S*	SWW	WW	W (std) B S F	NC LP IC CP X ⁵	WL EM

*Add 'R' for remote driver, ex. 'RS010'

Luminaire

- Part of a complete family of 1.5" aperture matching downlights.
- Small aperture, low brightness wallwash.
- Even illumination on 9' wall height with 18"-24" setback and 24"-36" spacing.
- High lumen output and excellent color rendition.
- Multiple housing styles for all mounting applications.
- Very shallow ceiling depth.
- L70 (TM21 Projected 85°C) = Static White 33,300 hours Warm Dim 55,000 hours.

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power¹

- M = Mid Power, 9.1W @ 500mA

CRI

- 92 = 92 CRI

CCT (Mid)²

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

Integral Driver NC / IC / CP Housings Accessible Ceiling^{3,4}

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 5% dimming, 120V only (12W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver for NC / LP / IC / CP^{3,4}

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (50W or 100W)
- RSPH = Remote phase (2-wire) 5% dimming, 120V only (12W)
- RPEQ0 = Remote Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (50W or 100W)

Cover

- SWW = Square Wallwash

Beam

- WW = Wallwash

Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Housing⁴

- NC = New Construction Housing (integral driver for accessible ceilings only)
- LP = Landing Pan (for remote driver)
- IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)
- CP = Chicago Plenum Housing (integral driver for accessible ceilings only)
- X = No Housing⁵

Options

- WL = Wet location
- EM = Emergency LED battery backup (remote only), 6W

1. Wattage shown is for LED only, system wattage varies depending on driver selected.
2. See photometric data sheet for delivered lumens.
3. See driver information page for details.
4. Refer to housings detail page for additional information.
5. Fixture can be installed without housing.