

# 1.5" ProTools Wallwash

## Sqaure Recessed



Recessed Plaster Trim (RPT)



Recessed Bezel Trim (RBT)

Ordering Information										
Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2</sup>	Driver <sup>3,4</sup>	Cover	Beam	Trim Finish	Housing <sup>4</sup>	Options
WG-40SPTWW		M	92			SWW	WW			
WG-40SPTWW	RBT RPT	M	92	27 30 35 40 WD	S1* S2* SPH* D010* PEQO* DALI*	SWW	WW	W (std) B S F	NC LP IC CP X <sup>5</sup>	WL EM

\*Add 'R' for remote driver, ex. 'RS2'

### Luminaire

- Part of a complete family of 1.5" aperture matching downlights.
- Small aperture, low brightness wallwash.
- Even illumination on 9' wall height with 18"-24" setback and 24"-36" spacing.
- High lumen output and excellent color rendition.
- Multiple housing styles for all mounting applications.
- Very shallow ceiling depth.
- L70 (TM21 Projected 85°C) = Static White 33,300 hours Warm Dim 55,000 hours.

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1</sup>

- M = Mid Power, 9.1W @ 500mA

### CRI

- 92 = 92 CRI

### CCT (Mid)<sup>2</sup>

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K
- WD = Warm Dimming 1800 - 3000K

### Integral Driver NC / IC / CP Housings Accessible Ceiling<sup>3,4</sup>

- S1 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 12W
- S2 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 22W
- SPH = standard phase (2-wire) 10% dimming, 120V only, 12W
- D010 = eldoLED 1% 0-10V dimming, 120-277V, 30W
- PEQO = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W
- DALI = eldoLED DALI-2 0.1% dimming, 120-277V, 20W

### Remote Driver for NC / LP / IC / CP<sup>3,4</sup>

- RS1 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 12W, for 1 fixture
- RS2 = standard eldoLED non-dim or 1% 0-10V dimming, 120-277V, 22W, for 1-2 fixtures
- RSPH = standard phase (2-wire) 10% dimming, 120V only, 12W, for 1 fixture
- RD010 = eldoLED 0.1% 0-10V dimming, 120-277V, 100W, for 1-8 fixtures
- RPEQO = Lutron Hi-Lume Premier 0.1% EcoSystem, 120-277V, 20W, for 1-2 fixtures
- RDALI = eldoLED DALI-2 0.1% dimming, 120-277V, 100W, for 1-4 fixtures

### Cover

- SWW = Square Wallwash

### Beam

- WW = Wallwash

### Trim Finish


- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Housing<sup>4</sup>

- NC = New Construction Housing (integral driver for accessible ceilings only)
- LP = Landing Pan (for remote driver)
- IC = Insulated Ceiling Housing (integral driver for accessible ceilings only)
- CP = Chicago Plenum Housing (integral driver for accessible ceilings only)
- X = No Housing<sup>5</sup>

### Options

- WL = Wet location
- EM = Emergency LED battery backup (remote only), 6W

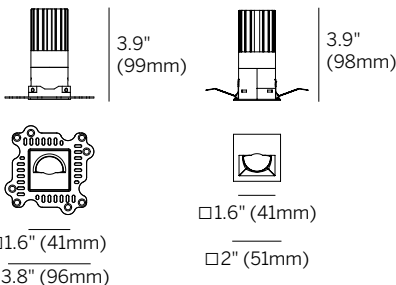

Plaster Trim (RPT)  
Cutout: □ 2" (50mm)

Bezel Trim (RBT)  
Cutout: □ 1.8" (46mm)

1. Wattage shown is for LED only, system wattage varies depending on driver selected.  
2. See photometric data sheet for delivered lumens.  
3. See driver information page for details.  
4. Refer to housings detail page for additional information.  
5. Fixture can be installed without housing.