



General: D-Wave represents a revolutionary lighting concept to illuminate even the most complex outdoor pathways. D-Wave is a surface mounted flexible low profile made of recyclable rubber (PVC) and designed to evenly illuminate walkways, trails, parks and any other area without any limitation. The product is meant to be placed along paths and walls. D-Wave (short for Dirigo Wave) is the evolution of our successful Dirigo product, designed as alternative to bollards, taking a totally different approach, where the fixture blends with the trail it's illuminating and maintains excellent light levels alongside it, without being noticed. D-Wave uses our popular Rubber 3D products as light engine, or it could accommodate basic tape light like our Silicone_C. Lastly, D-Wave is a Full Cut-Off product, suitable for Dark Light applications.

Fixture Body: D-Wave profile is made of PVC, lead free. Please refer to Rubber or Silicone_C spec sheets for lighting engine material.

Mounting: Surface mounted.

Weight: 1.78 lbs./ft (D-Wave profile only, excluding lighting engine. Please refer to Rubber and Silicone_C spec sheets for their weight).

Drive-over: Fixture is Walk-Over only.

Driver: Remote. 24V DC Dimmable 0-10V, Lutron EcoSystem 0.1% or Non-Dim. 24V DC DMX Dimmable (for Rubber 3D RGBW only).

Wattage: 3 W/ft (Rubber 3D), 6.7 W/ft (Rubber 3D Optic), 5 W/ft (Rubber 3D RGBW), 4.4 W/ft (Silicone_C).

Cable: Rubber products come with 0.82' of cable (Power cable required, ordered separately). Silicone_C comes with 0.98' of cable.

IP rating: IP67 for temporary flooding up to 3.28' depth for up to a maximum of 30 mins (rating valid whether D-Wave is used with Rubber products or with Silicone_C tape).

IK rating: IK 10

ETL Certification: ETL, wet location


Optics: Fixed, available as General Illumination (Rubber 3D or Silicone_C), with Elliptic Spot or Elliptic Flood (Rubber 3D Optic), RGBW (Rubber 3D RGBW). Fixture is Full Cut-Off (Dark Sky Compliant).

Color temperatures: 2700K - 3000K – 4000K – RGBW (Rubber). 3000K – 4000K (Silicone_C).

CRI: 80+ (valid for both Rubber and Silicone_C products).

Lumen Maintenance: L70 projections tested at Tj 65° C and Ta 25°.

Warranty: 5-year Limited Warranty on fixtures. 1-year Limited Warranty on Remote Drivers.



Lumens per foot for LED roles

3DWH = 2700K 139lm/ft (d) / 3000K 154lm/ft (d) / 4000K 165lm/ft (d)

3DCON = 3000K 76 lm/ft (d)

3DOPTWH-ELSP = 2700K 539lm/ft (d) / 3000K 567lm/ft (d) / 4000K 595lm/ft (d)

3DOPTWH-ELFL = 2700K 569lm/ft (d) / 3000K 599lm/ft (d) / 4000K 629lm/ft (d)

3DOPTBL-ELSP = 2700K 461lm/ft (d) / 3000K 486lm/ft (d) / 4000K 510lm/ft (d)

3DOPTBL-ELFL = 2700K 490lm/ft (d) / 3000K 516lm/ft (d) / 4000K 542lm/ft (d)

SIL = 3000K 343lm/ft (d) / 4000K 370lm/ft (d)

Ordering Information							(Required) ⁶	
DWA ¹	LED Reel	Length	Wattage/Operation	Color Temp	Optic	+	Driver	Accessories
DWA = D-Wave	3DWH = 3D, White Finish	A = (Specify length) Reel cuttable in 1.8" increments	3CV = 3W/ft / Remote Constant Voltage 24V DC	27 = 2700K 30 = 3000K ³ 40 = 4000K	GE = General ELSP = Elliptical/Spot ELFL = Elliptical/Flood		D010	E77408
	3DCON = 3D, Concrete finish	A = (Specify length) Reel cuttable in 1.8" increments	7CV = 6.7W/ft / Remote Constant voltage 24VDC DMX driver				L3DOE	E77409
	3DOPTWH = 3D Optic, White Finish	A = (Specify length) Reel cuttable in 6.5" increments	4CV = 3.7W/ft / Remote Constant Voltage 24V DC (3000/400K)				NDW	E77410
	3DOPTBL = 3D Optic, Black Finish	A = (Specify length) Reel cuttable in 3.94" increments	4.4W/ft / Remote Constant Voltage 24V DC (2700K)				DMX	E77411
	SIL = Silicone_C Hi Flux	A = (Specify length) Reel cuttable in 3.94" increments	5CVD = 5W/ft / Remote Constant voltage 24VDC DMX driver ²	R3 = RGBW 3000K ⁴	GE = General ⁵		CVDMX	E77412
	3DWH = 3D, White Finish	A = (Specify length) Reel cuttable in 1.8" increment						E77469
								E99688
								E99692
								E99539
								C-V400002

¹D-Wave modules ship in 78.74" (2m) sections/ increments, to be field cuttable. Hard ground brackets are included (E77411 Soft ground pegs ordered separately).

Straight junction accessories E77410 included (where required based on the layout).

Right E77408 and Left E77409 end cap accessories included (where required based on the layout).

3D LED reels ship in 39.37" (1m) and 196.85" (5m) length, field cuttable in 1.8" increments.

3DOpt LED reels ship in 39.37" (1m), 59.05" (1.5m) and 118.11" (3m) length, field cuttable in 6.5" increments.

SIL reels ship in 196.85" (5m) length, field cuttable in 3.94" increments.

For patterns requiring 90° corners (internal or external), please specify as separate systems, and order the applicable accessories separately.

Minimum bending radius: 35.4" (900mm).

² White Only


³ Concrete only available in 3000K

⁴ R3 available with 5CDMX only

⁵ R3 General illumination only

⁶ See page 2

3W/ft / 7.6W/ft 24V CC

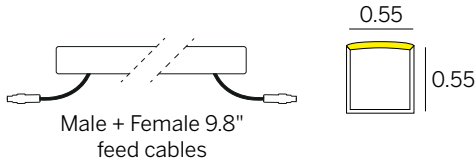

DRIVER OPTIONS (pick one)

C.V. Power supply options (remote only)

OT96-D010

Remote 10% 0-10V dim,
Dry location CV 24VDC
96W driver


L3D0E

Remote 0.1% Lutron
EcoSystem dim, Dry
location CV 24VDC
driver 96W

NDW

Remote Non-dim,
Wet location CV
24VDC driver 96W
(Non-direct burial)

5W/ft 24V CV

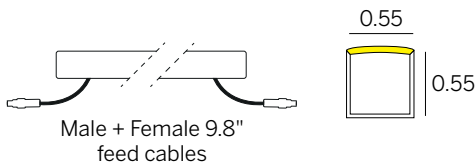


DRIVER OPTIONS (pick one)

C.V. Power supply options (remote only)

CVDMX

Remote Constant voltage
24VDC DMX driver

Accessories



Mounting bracket
4X Included



E77408
Right cap
accessory¹



E77409
Left cap
accessory¹



E77410
Profile jointing
accessory



E77411
Fixing stake



E77412
Curved for internal
90° corner



E77469
Curved for external
90° corner



E99688
Rubber feed cables
for single CCT¹



E99692
Rubber feed cables
for RGBW¹



E99539
Pair of end caps
and silicone tube¹



C-V40000
Fixing kit - Kit for splicing/sealing
the LED strips


¹Feed cables and end caps are included on each system configuration, as needed

COMPLETE D-WAVE WITH THE LIGHT UNIT OF YOUR CHOICE

Complete D-Wave with the light unit of your choice


D-Wave is an all-in-one extrusion that can contain in the front channel, a light source chosen from:

- Rubber 3D
- Rubber 3D Optic
- Rubber 3D RGBW
- Rubber 2D
- Silicon_C

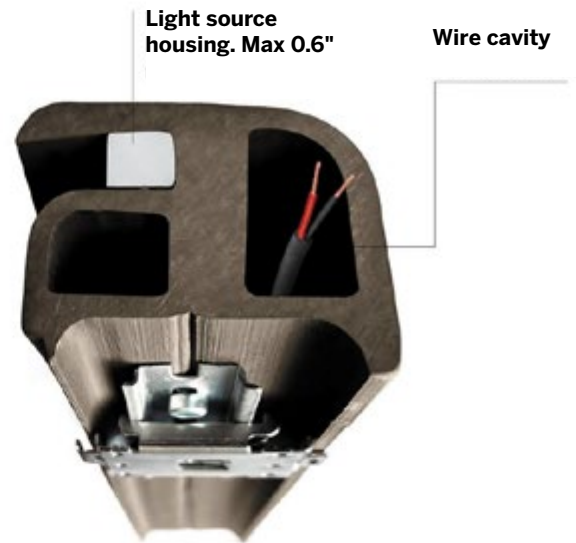

Complete D-Wave with the Rubber light source

Discover
The Rubber Family



Rubber 2D
Rubber 3D




Rubber 3D Optics



Rubber 3D RGBW

Complete D-Wave with the Silicone_C light source

Discover
The Silicone_C Family



Silicone_C 0.5"


MAXIMUM DESIGN FLEXIBILITY, EVEN IMPOSSIBLE ONES

PATENT
PENDING



Two-axis flexibility

D-WAVE is a system with the highest flexibility and adaptability available on the market. Its cross-section, studied in every detail, allows both zenithal and lateral bending, which allows D-WAVE to overcome any obstacle or embrace any path. The extruded profile, studied in every detail, can have an endless range of customisations thanks to its extreme ductility. The illumination of contemporary architecture, even the most complex and articulated, will always find its correct solution.

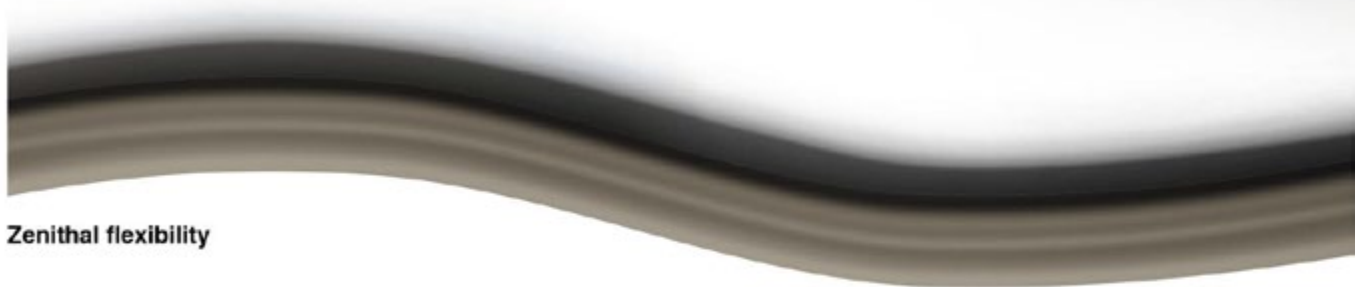

Zenithal flexibility



Lateral flexibility (can only be achieved with Rubber 3D)

BORN FOR THE FUTURE: 100% RECYCLABLE 100% CUSTOMISABLE

D-WAVE is a profile designed in every detail to meet all of the designer's needs. The material is 100% recyclable and the base is designed to accommodate the fastening systems provided: bracket and stake. Two anchoring methods that facilitate installation by adapting to the perimeter to be followed. Engraved on the base is the Recycle 3 logo, which allows the type of material to be recognised for proper recycling.



35.4"



90° bending radius in just 35.4"

Thanks to its great zenithal flexibility, D-WAVE allows to obtain wide continuous curvatures in the plane. Thanks to the material it is made of, the extruded profile can follow any type of curved perimeter, without interruptions in wiring or light falloff. By combining it with equally flexible and ductile light sources, perfect light continuity is optimised and preserved.

35.4"



90° angle connection cuts

D-WAVE is available in 6.6 foot long modules. D-WAVE can be cut anywhere, even at 90° angles, thanks to the special angular joint, and it can be connected in perfect aesthetic and functional continuity.

This solution offers two major advantages: work can be carried out with millimetric precision, without losing efficiency, and the brightness can be maintained constant along the entire perimeter.


Floor mounting

Thanks to the quick-release steel bracket, D-WAVE can be mounted on any floor. Positioned at a 19.7° pitch, the bracket ensures firm and continuous anchoring over the entire length of the luminaire.



Ground mounting

For this type of installation, a small steel stake has been provided, which is also adjustable and can be placed at a certain pitch, ensuring continuous and safe anchoring over the entire length of the perimeter.

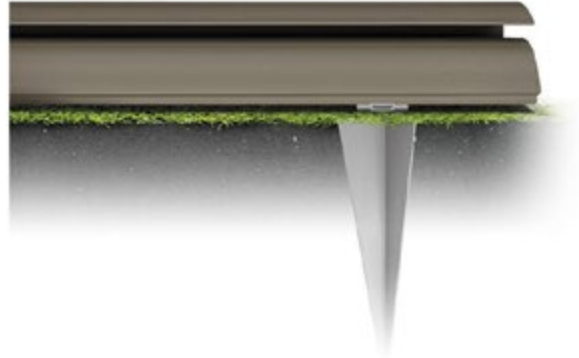


Quick-release bracket


We have designed a quick-release bracket system. This is ideal in case of maintenance, replacement or relocation of the luminaire. Thanks to the rear lever, the bracket is quickly released from the profile, leaving it free, thus facilitating the planned operations.

All-in-one

D-WAVE is an all-in-one extruded profile that contains the light source in the front channel: Rubber 3D, Rubber 2D, or Silicon_C, all the wiring required for your project is protected in the rear channel. The duct passing under the light source is used to support the lighting profile inserted. All the technological components that make up the D-WAVE system are housed in a single profile.

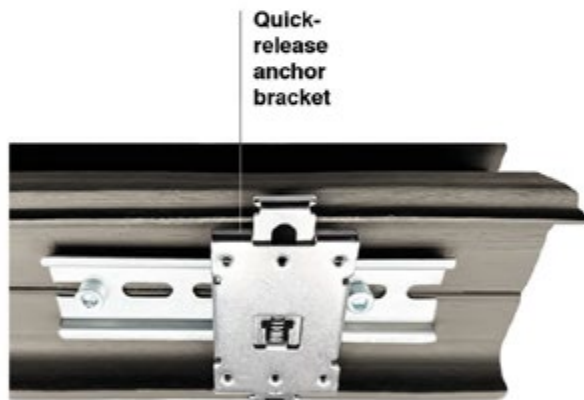

Quick-release anchor bracket

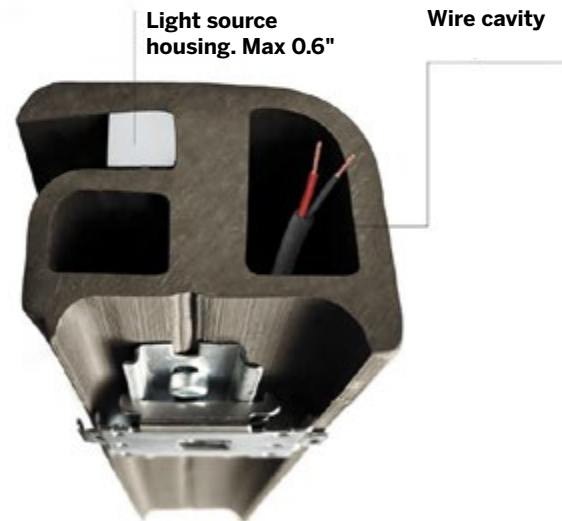

Light source housing. Max 0.6"

Wire cavity

Connecting element

We have designed an invisible connecting element that contributes to the maximum aesthetic and functional continuity of D-WAVE. The intermediate joint, linear or angular, allows for the continuous passage of cables and light sources without interruptions or fallout.

Anchor brackets

Positioned every 19.7", they ensure secure and stable installation on any floor or ground and with any zenithal or lateral curvature. The brackets guarantee completely safe installation in any location and in all surface conditions.

Closing element

The end element that closes D-WAVE completes the marker light, making it perfectly unified and continuous along the entire length. An essential accessory from a functional and aesthetic point of view.



78.7"