


Eclipse 50

inter•lux

PENDANT

Direct, indirect or direct-indirect illumination





Model 1670



Size

24.8" (631mm)
36.3" (921mm)
47.7" (1211mm)
59.1" (1500mm)
70.5" (1790mm)
Custom

STRAIGHT CABLES WITH REMOTE DRIVER

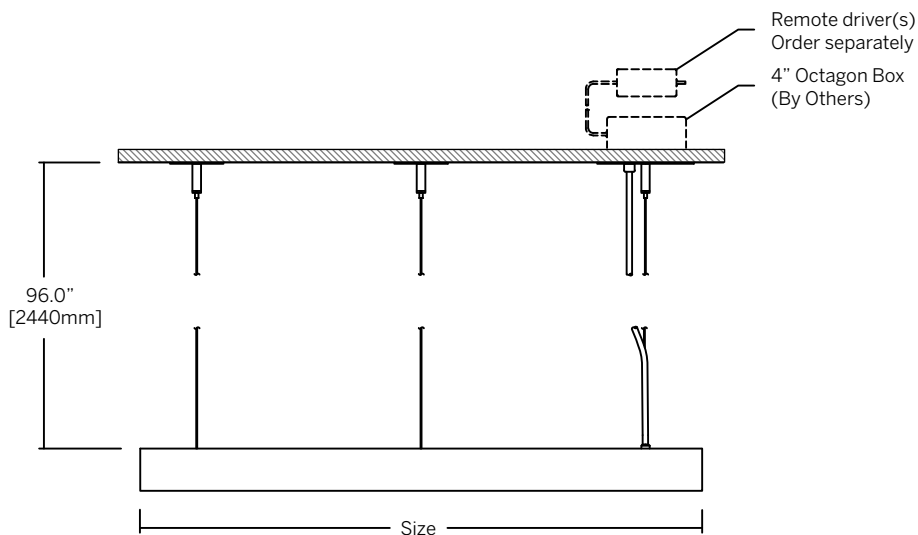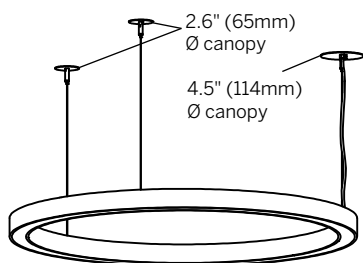

CENTER CANOPY WITH REMOTE DRIVER

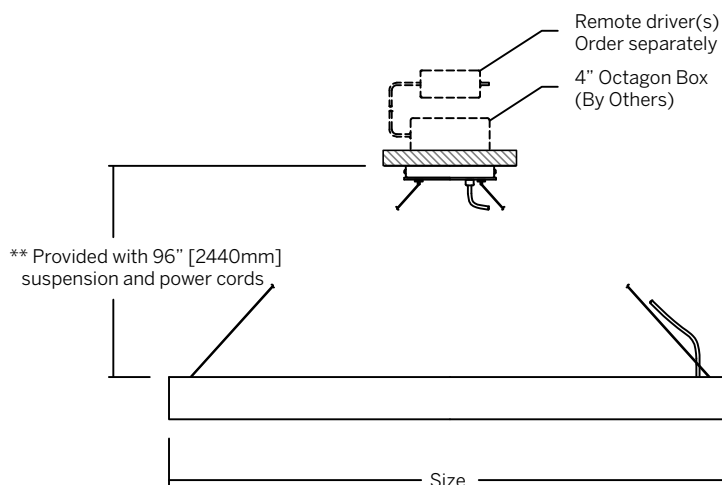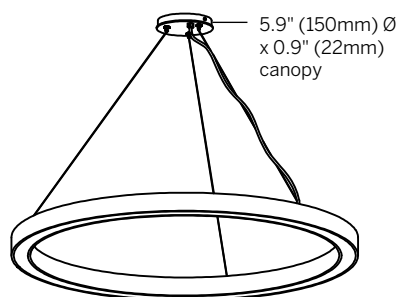

Minimum mounting height per fixture size for center canopy options:

Fixture Size (Diameter)	Minimum Mounting Height
24.8" (631mm)	15" (380mm)
36.3" (921mm)	20" (510mm)
47.7" (1211mm)	30" (760mm)
59.1" (1500mm)	40" (1,015mm)
70.5" (1790mm)	50" (1,270mm)



scan or click
for info



410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.




inter-lux.com/alm 1

Eclipse 50

PENDANT

Direct, indirect or direct-indirect illumination

CENTER CANOPY WITH INTEGRAL DRIVER

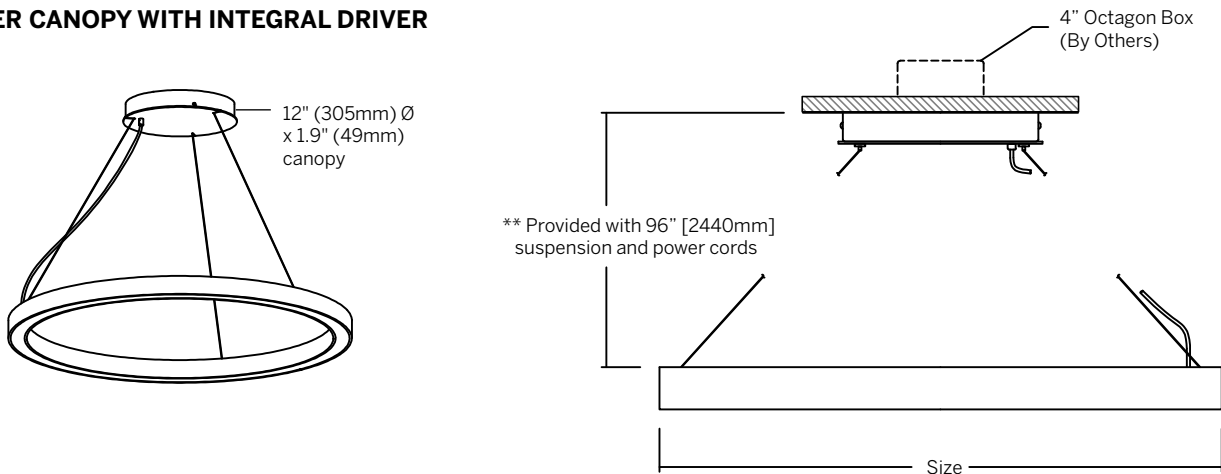

Minimum mounting height per fixture size for center canopy options:

Fixture Size (Diameter)	Minimum Mounting Height
24.8" (631mm)	15" (380mm)
36.3" (921mm)	20" (510mm)
47.7" (1211mm)	30" (760mm)
59.1" (1500mm)	40" (1,015mm)
70.5" (1790mm)	50" (1,270mm)



scan or click
for info





Eclipse 50

inter•lux

PENDANT



Direct, indirect or direct-indirect illumination

POWER FEED / SUSPENSION

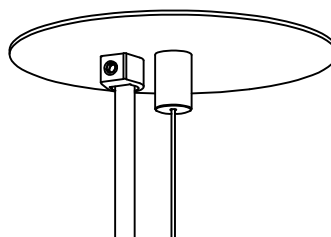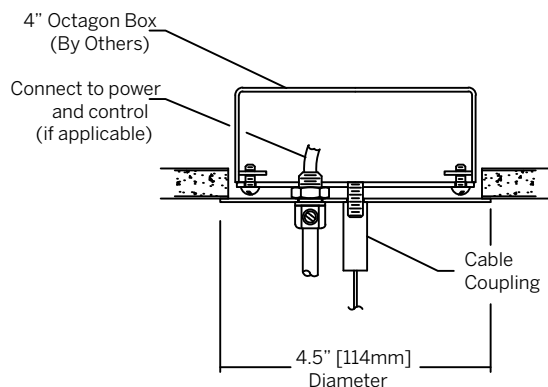



Mounting Option Power
Octagon Box (By Others)
Installed in drywall, wood or concrete ceiling

SUSPENSION - NON POWER (ACCESSIBLE CEILING)

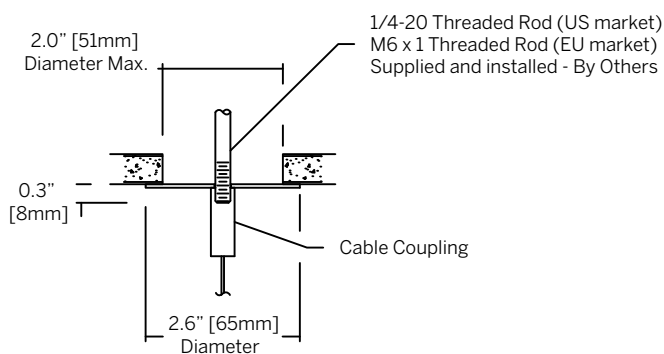

Mounting Option - Non Power
Threaded Rod installed
to structural ceiling (By Others)

SUSPENSION - NON POWER (NON-ACCESSIBLE CEILING)

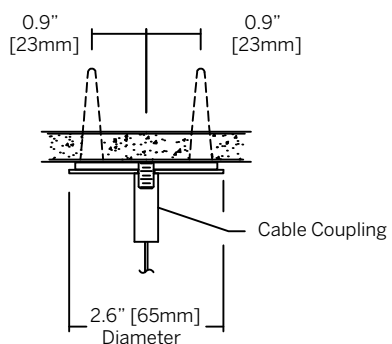

Mounting Option - Non Power
Suspension Assembly
Installed in drywall, wood or concrete ceiling



scan or click
for info

