

Frame 70

PENDANT

Direct illumination

Model 1545

Type

P Pendant

Size

24	24.0" (610mm)
36	36.0" (914mm)
48	48.0" (1219mm)
Custom	

Wattage^{1,2}

24"	
L	20W (2665lm)
M	40W (4955lm)
36"	
L	32W (4265lm)
M	64W (7925lm)
48"	
L	44W (5865lm)
M	88W (10895lm)

Color Temp³

30	3000
35	3500
40	4000

Voltage

U 120/277 Volt

Driver

RD Remote

Control - RD

S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

Finish⁴

16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting


SC	Straight cables
CE	Center canopy

Power Cable⁵


CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes


- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard
- 4 Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
- 5 96" standard cable length

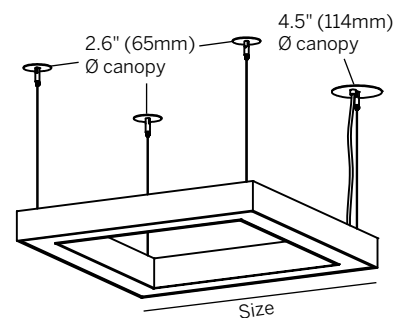


Straight cables with remote driver

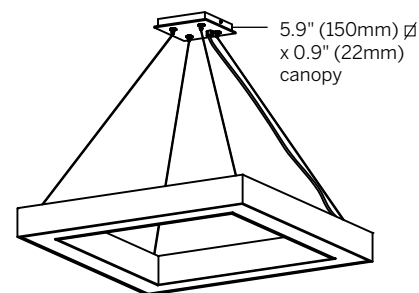

Center canopy with remote driver

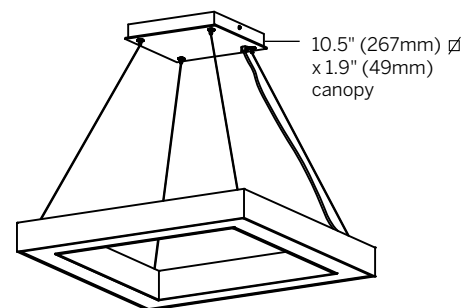

Center canopy with integral driver



Section