



HUSH LIGHT - MICRO

Designed in association with David Trubridge Design Studio


inter•lux




COLOR

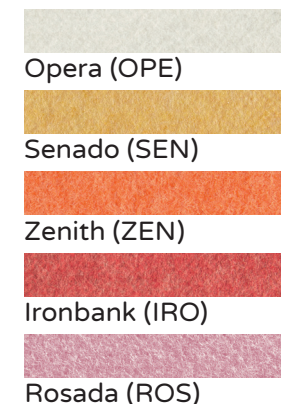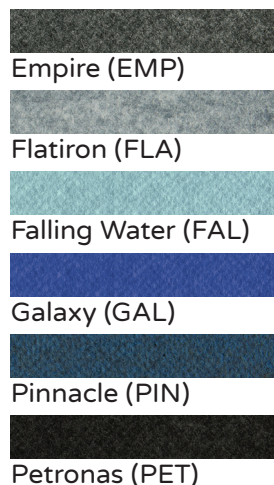

LAMPING OPTIONS:

- ☐ ¹ Hood Only
- ☐ ² E26 
- ☐ ³ LED Pinpoint 3000K
*Ships standard with driver
Meanwell PCD-16-700A*

VOLTAGE OPTIONS:

- ☐ ^A 110V
- ☐ ^B 277V
- 

LED CUSTOM OPTIONS:

Contact wakaNINE for available options

- ☐ _____ K
- ☐ _____ Lumens
- ☐ _____ Driver

SPECS:

Felt Panels:

Assembled size:

Net weight:

Lamping Options:


.24 in / 6mm thick, 100% polyester. Minimum 65% post-consumer recycled PET bottle flake

30 in L x 30 in W x 14 in H
750 mm L x 750 mm W x 350 mm H

3.7 lb / 1.7 kg


- ¹ Hood Only
- ² 1 x E26 cordset (suggest frosted G40) / max 100W
- ³ 5 x Integrated, replaceable, energy-efficient LEDs 3000 Kelvin, CRI 90+, 10W, 1800 lumens

Declare.
Material only

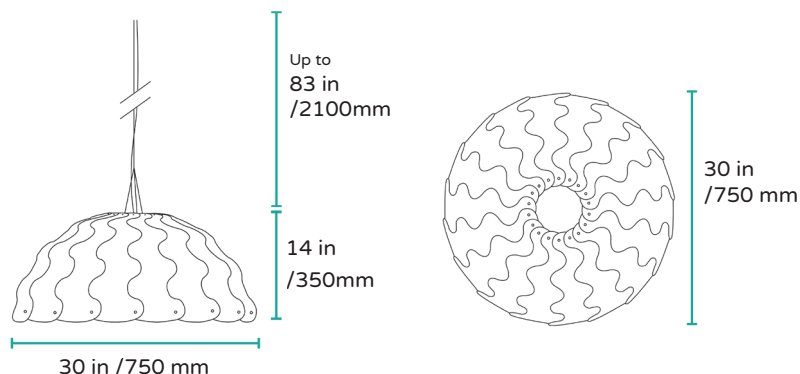


HUSH


410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.

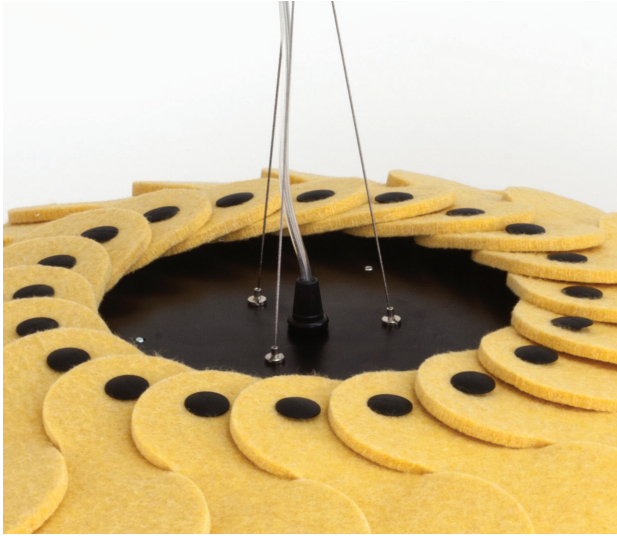


Top of lighting panel with suspension wires. Three adjustable length wires join into a central wire for easy hanging.

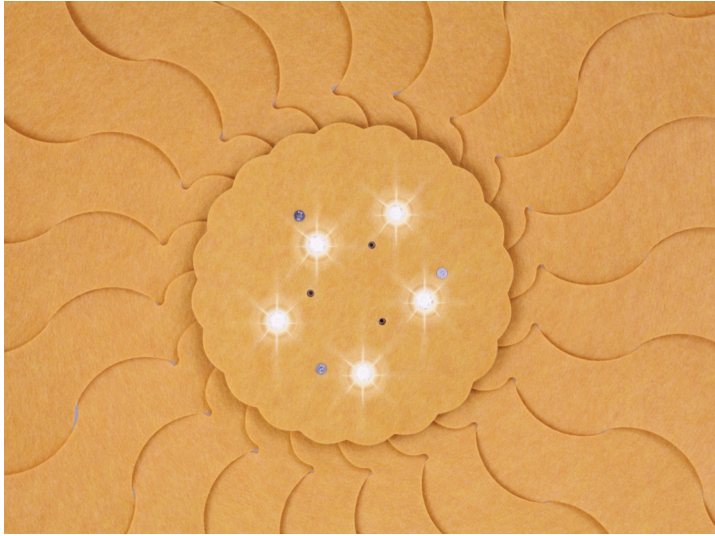

Hush Mini LED is illuminated by 5 pinpoint LEDs.

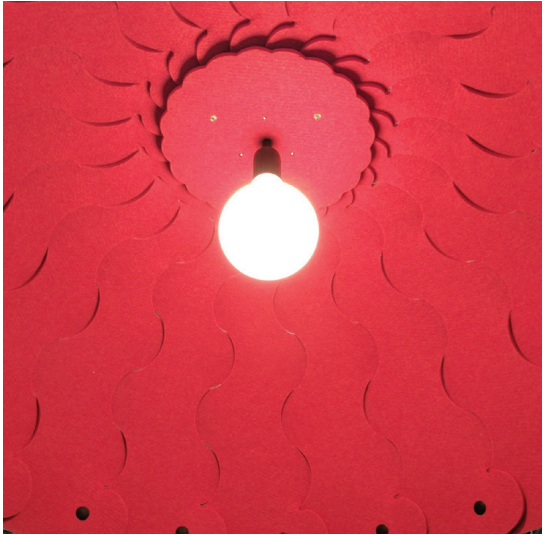

E26 lamping. Hush Mini shown with G40 frosted bulb (not included).

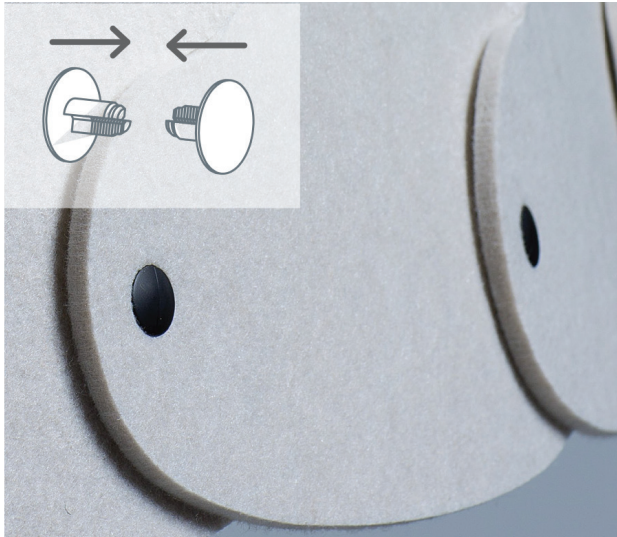

Hush lights are assembled using plastic ratchet rivets that push from each side and lock in place to hold the component pieces together.



LEAD TIME:
Average lead time: 6-8 weeks
(expediting possible for an upcharge)

Hush can be shipped as a kitset, or fully assembled.

inter•lux

HUSH