



Solar Powered Bollard  
Automatic Operation

**reed M solar**      **color**      **item no.**      **system performance**




● **deep black**  
**RAL 9005**      93821-BL      **1.1 W/22 lm**

**reed L solar**      **color**      **item no.**      **system performance**

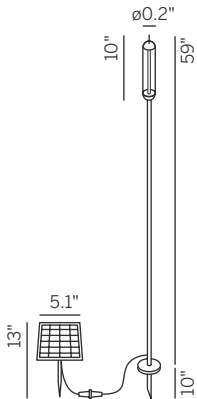

● **deep black**  
**RAL 9005**      93822-BL      **1.1 W/22 lm**

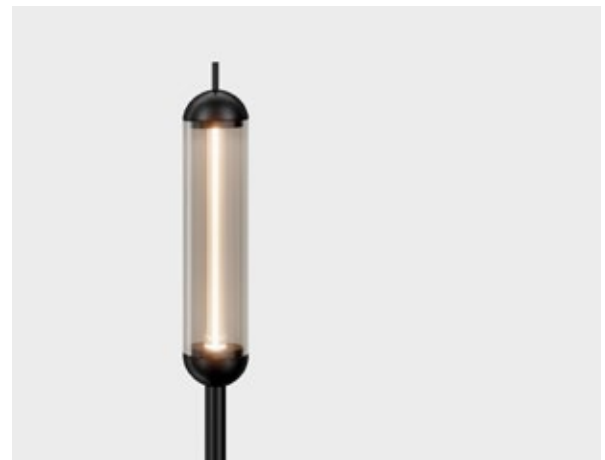

**technical information:**

LED  
lithium-ion battery  
1x 2600 mAh  
2700K  
solar panel S

**operating time:**

automatic switch-on at dusk  
for a duration of approx. 5 hrs

**connection:**

4.6 ft (reed M)/3.9 ft (reed L)  
supply cable luminaire  
(H05RN8-F 2x0.03"²)  
+ 3.3 ft supply cable solar panel  
(H05RN8-F 2x0.03"²)

**movable**

**material:**

luminaire: aluminum die-casting  
powder-coated  
+ smoke-colored glass  
solar panel: head: aluminium-diecasting  
powder-coated; pole:  
stainless steel powder-coated;  
clear glass

**protection class:**

**IP65**



**light direction:**

