

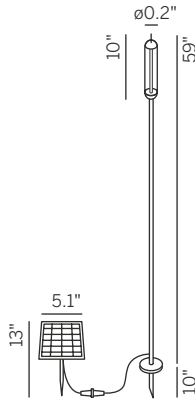

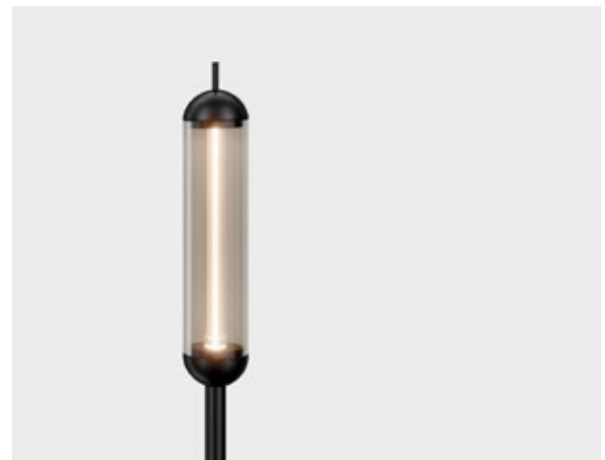


Solar Powered Bollard Automatic Operation

reed M solar	color	item no.	system performance
	 deep black RAL 9005	93821-BL	1.1 W/22 lm

reed L solar	color	item no.	system performance
	 deep black RAL 9005	93822-BL	1.1 W/22 lm



technical information:

LED
lithium-ion battery
1x 2600 mAh
2700K
solar panel S

operating time:

automatic switch-on at dusk
for a duration of approx. 5 hrs

connection:

4.6 ft (reed M)/3.9 ft (reed L)
supply cable luminaire
(H05RN8-F 2x0.03"²)
+ 3.3 ft supply cable solar panel
(H05RN8-F 2x0.03"²)

movable

material:

luminaire: aluminum die-casting
powder-coated
+ smoke-colored glass
solar panel: head: aluminium-diecasting
powder-coated; pole:
stainless steel powder-coated;
clear glass

protection class:

IP65



light direction:

