

Ring 100

PENDANT

Direct, indirect or direct-indirect illumination

Model 1692

Type

P Pendant

Size

24 25.5" (647mm)
36 36.9" (938mm)
48 48.4" (1229mm)
60 59.8" (1519mm)
72 71.2" (1808mm)
Custom

Wattage^{1,2}

Direct³

24"
LD 18W (2400lm)
MD 36W (4460lm)

Indirect⁴

LI 18W (2400lm)
MI 36W (4460lm)

36"

LD 27W (3600lm)
MD 54W (6685lm)

LI 27W (3600lm)
MI 54W (6685lm)

48"

LD 36W (4800lm)
MD 72W (8915lm)

LI 36W (4800lm)
MI 72W (8915lm)

60"

LD 45W (6000lm)
MD 90W (11145lm)

LI 45W (6000lm)
MI 90W (11145lm)

72"

LD 54W (7200lm)
MD 108W (13375lm)

LI 54W (7200lm)
MI 108W (13375lm)

XD-No Direct

XI-No Indirect

Color Temp⁵

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote
ID Integral

Control - RD

S Non-dim
D010 0-10V 1%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem
X If integral driver is selected

Control-ID (in canopy - if selected)

S Non-dim
D010 0-10V 1%
X If remote driver is selected

Diffuser Bottom

SW Satin opal acrylic
CB Aluminum-painted to match the fixture

Diffuser Top

SA Satin clear acrylic
CT Aluminum-painted to match the fixture

Finish⁶

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting

SC Straight cables - remote driver
CERD Center canopy - remote driver
CEID Center canopy - integral driver

Circuit


CS Circuit - Single
CD Circuit - Dual

Power Cable⁷


CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes


- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 For no Direct light specify XD
- 4 For no Indirect light specify XI
- 5 90+ CRI standard
- 6 Canopy finish matches housing
- 7 96" standard cable length

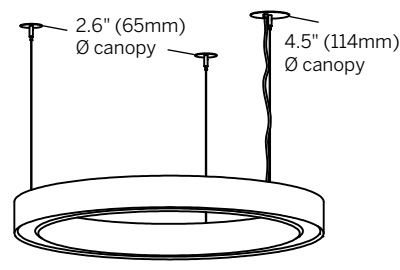


Size
Straight cables with remote driver

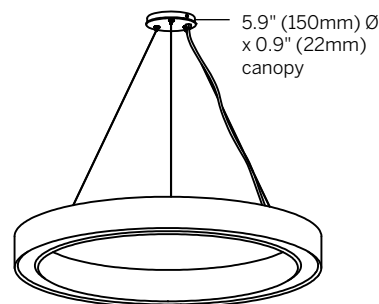

Center canopy with remote driver

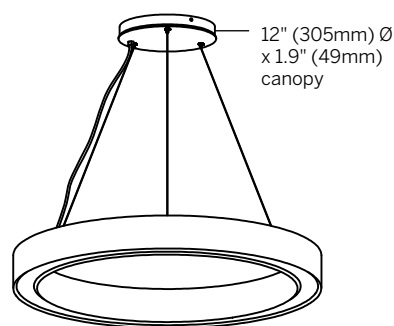

Center canopy with integral driver



Section