


# Ring 65

PENDANT

Direct, indirect or direct-indirect illumination





Model 1691



Size

- 25.5" (647mm)
- 36.9" (938mm)
- 48.4" (1229mm)
- 59.8" (1519mm)
- 71.2" (1808mm)
- Custom

STRAIGHT CABLES WITH REMOTE DRIVER

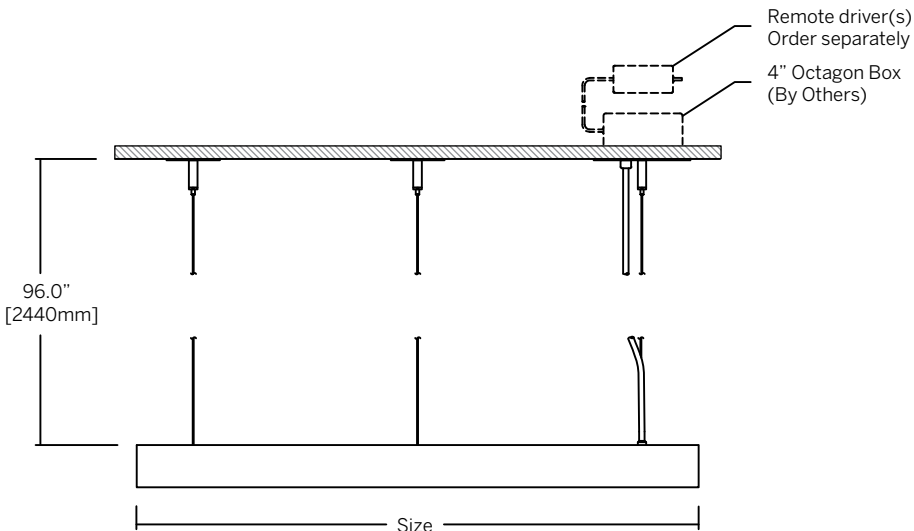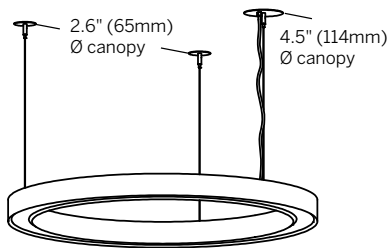

CENTER CANOPY WITH REMOTE DRIVER

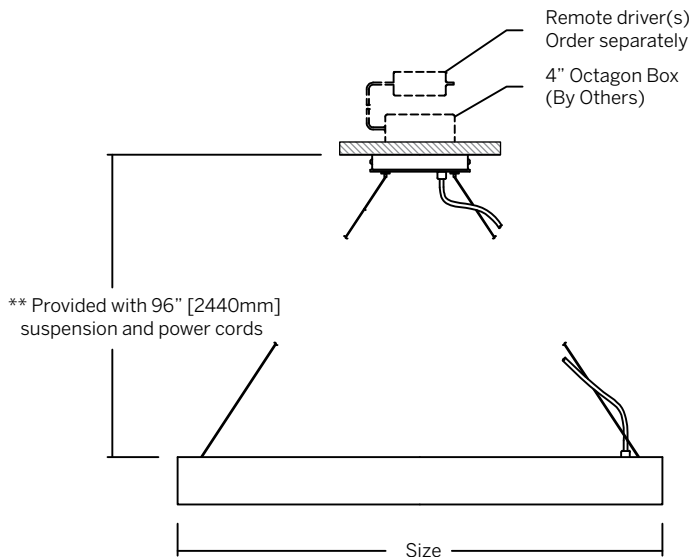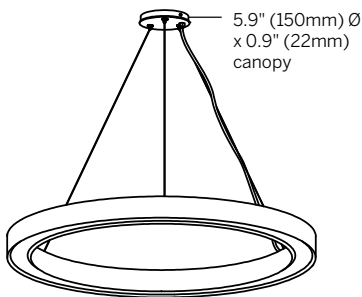

Minimum mounting height per fixture size for center canopy options:

Fixture Size (Diameter)	Minimum Mounting Height
25.5" (647mm)	15" (380mm)
36.9" (938mm)	20" (510mm)
48.4" (1229mm)	30" (760mm)
59.8" (1519mm)	40" (1,015mm)
71.2" (1808mm)	50" (1,270mm)



scan or click  
for info





# Ring 65

## PENDANT

Direct, indirect or direct-indirect illumination

inter•lux

### CENTER CANOPY WITH INTEGRAL DRIVER

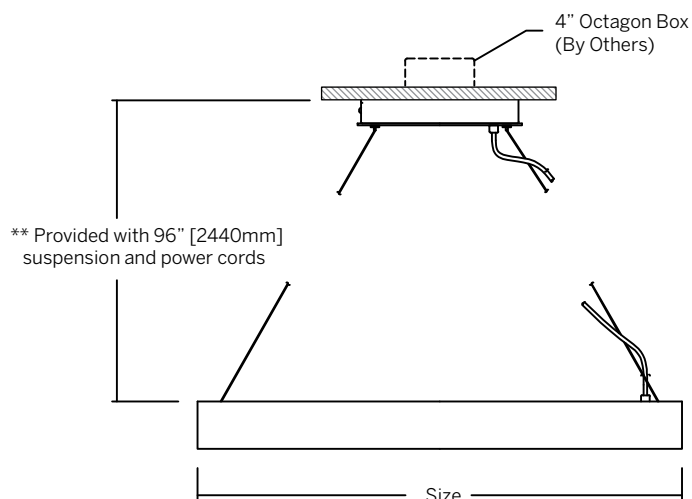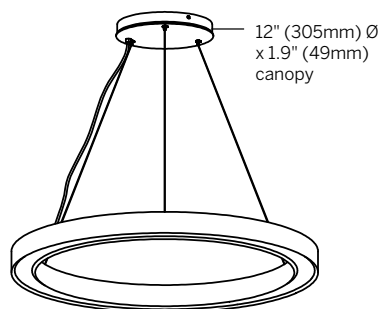

#### Minimum mounting height per fixture size for center canopy options:

Fixture Size (Diameter)	Minimum Mounting Height
25.5" (647mm)	15" (380mm)
36.9" (938mm)	20" (510mm)
48.4" (1229mm)	30" (760mm)
59.8" (1519mm)	40" (1,015mm)
71.2" (1808mm)	50" (1,270mm)



scan or click  
for info



410 381 1497 inter-lux.com answers@inter-lux.com  
Inter-lux reserves the right to make technical changes without notice.



inter-lux.com/alm 2



# Ring 65

inter•lux

## PENDANT



Direct, indirect or direct-indirect illumination

## POWER FEED / SUSPENSION

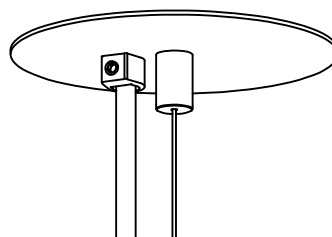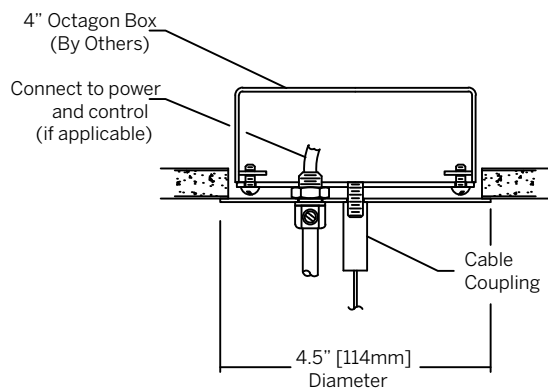



Mounting Option Power  
Octagon Box (By Others)  
Installed in drywall, wood or concrete ceiling

## SUSPENSION - NON POWER (ACCESSIBLE CEILING)

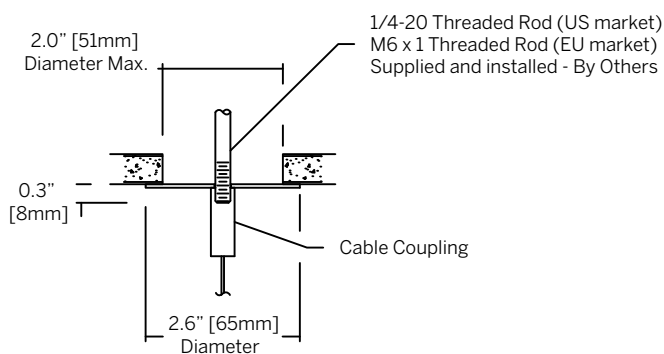

Mounting Option - Non Power  
Threaded Rod installed  
to structural ceiling (By Others)

## SUSPENSION - NON POWER (NON-ACCESSIBLE CEILING)

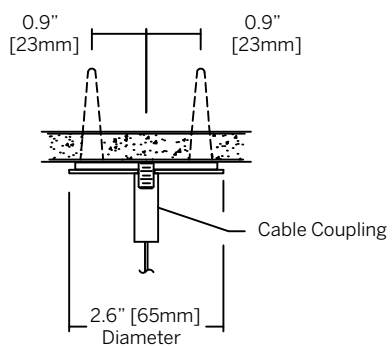

Mounting Option - Non Power  
Suspension Assembly  
Installed in drywall, wood or concrete ceiling



scan or click  
for info

