





Lighting defined





Since our foundation in 1998, ALM's mission is to be a leader in the manufacturing of architectural lighting. We understand light and endeavor to improve the integration between light and architecture. ALM is a manufacturer of innovative, high-quality lighting. With both a standard fixture series and custom design, we offer an unlimited choice of designs, materials, finishes, and lighting options. We are a complete design, engineering, and manufacturing resource for architectural lighting products that are delivered throughout the world.

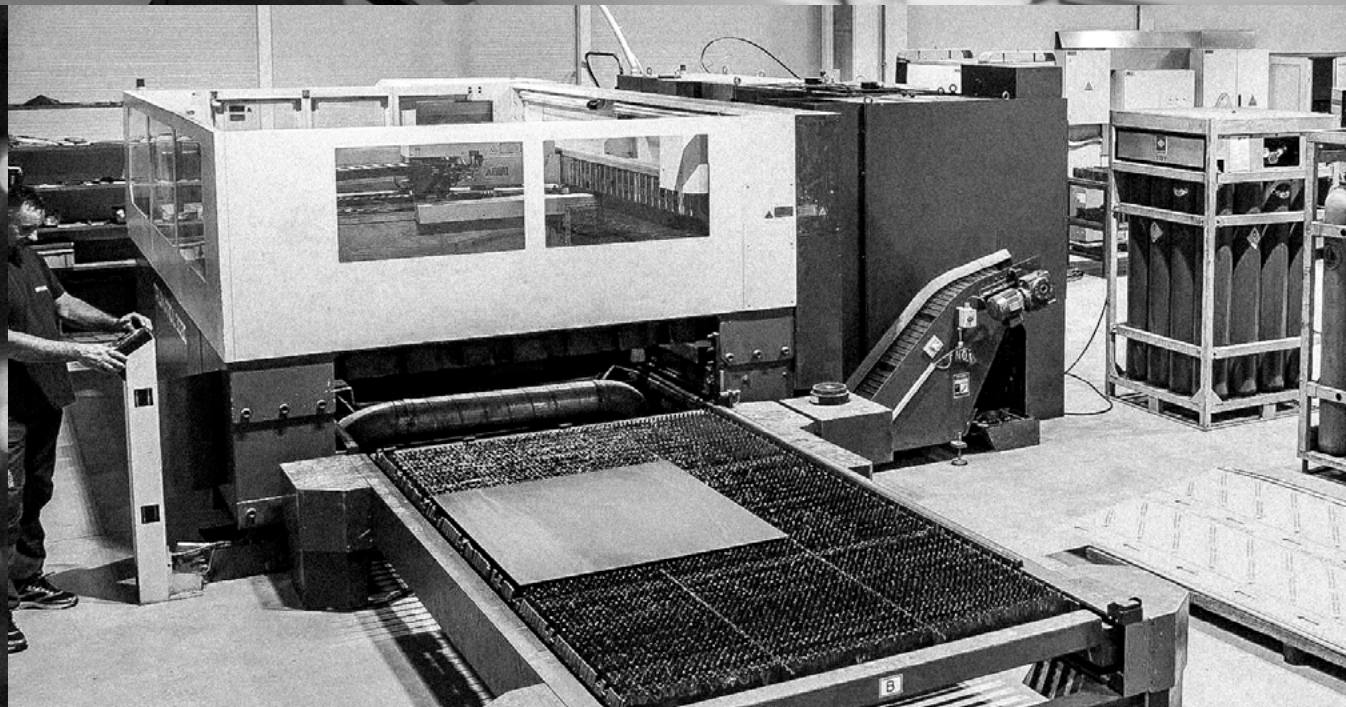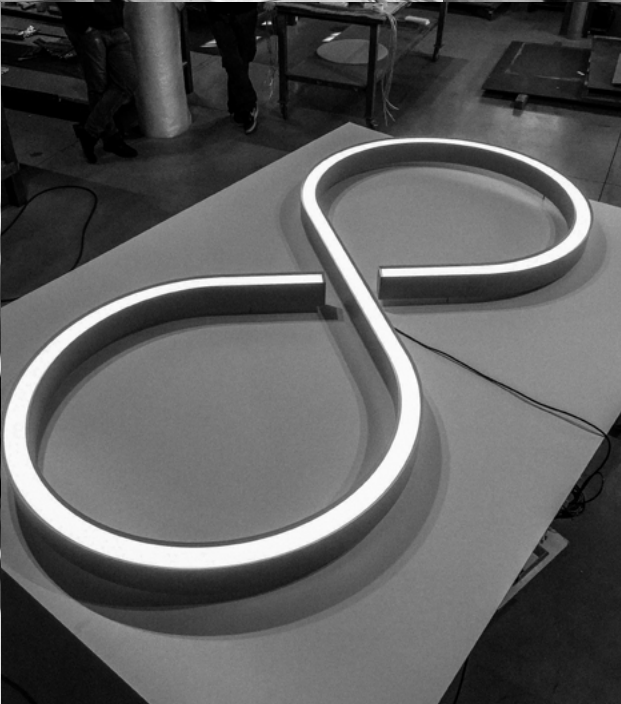

Project Lighting

A combination of standard and customizable products lending themselves to large projects that require multiple versions of the same style luminaires to accomplish the desired design intent. ALM is singularly focused on budget conscious opportunities that can take advantage of a flexible design approach and prime manufacturing to deliver value to the project.

inter•lux

The Standard Product Range




The ALM Standards range is characterized by clean lines, architectural shapes and the latest, most efficient LED lighting sources and controls. By maintaining a no-frills approach to the standard products, ALM leaves a lot of room for the designer to tailor to their requirements and budget.





Assemblies

By combining Standards into Assemblies, new and significantly larger scale products can be configured that will extend the reach of the product range, as well as deliver continuity to the overall aesthetic and performance of the design.

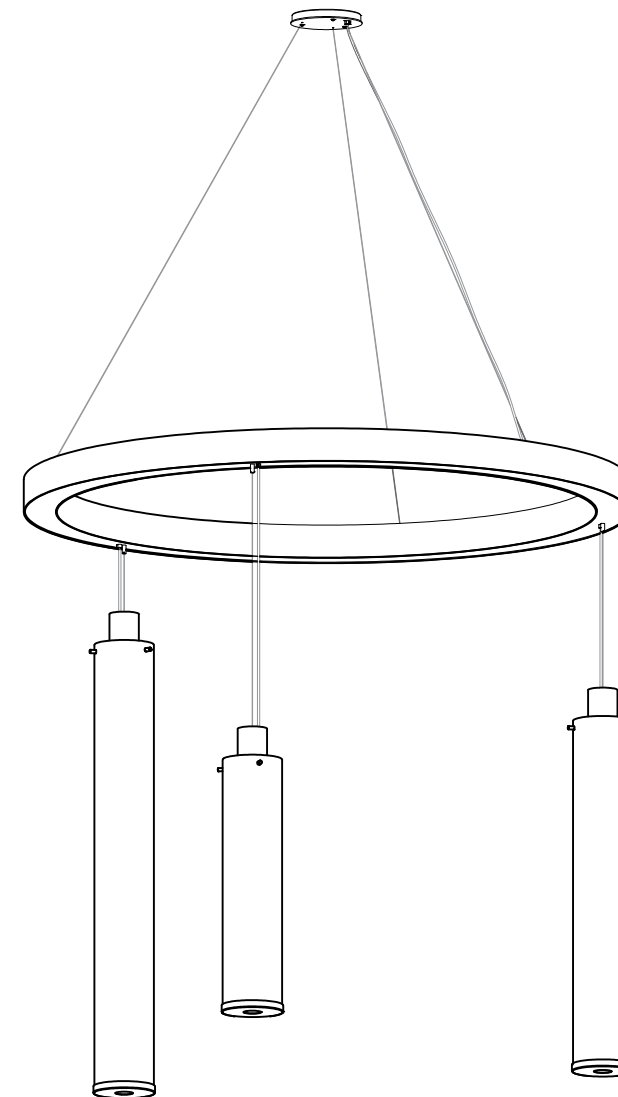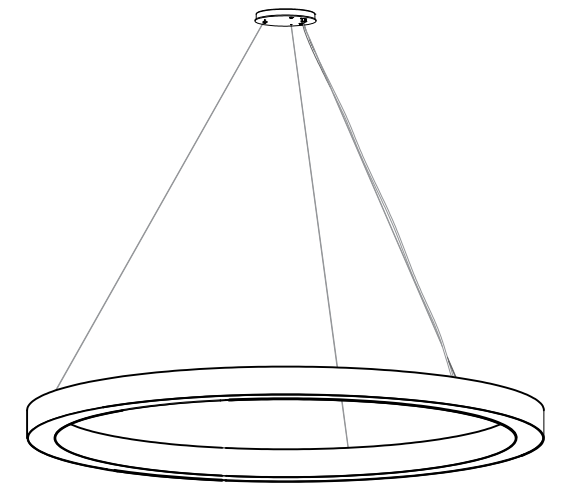


Modified Standards

Families of luminaires in multiple sizes provide a wide selection of lighting performance characteristics that will accomplish the aesthetic as well as the illumination tasks. Often a modification is required to augment an architectural detail or to illuminate a feature. In that case, ALM is fully capable of meeting the design requirements.





Modifications may include size, shape, finish and performance variants. ALM may be asked to take an indoor product outdoor, change the mounting from pendant to wall mount or add architectural details to an existing product that totally changes the aesthetic.

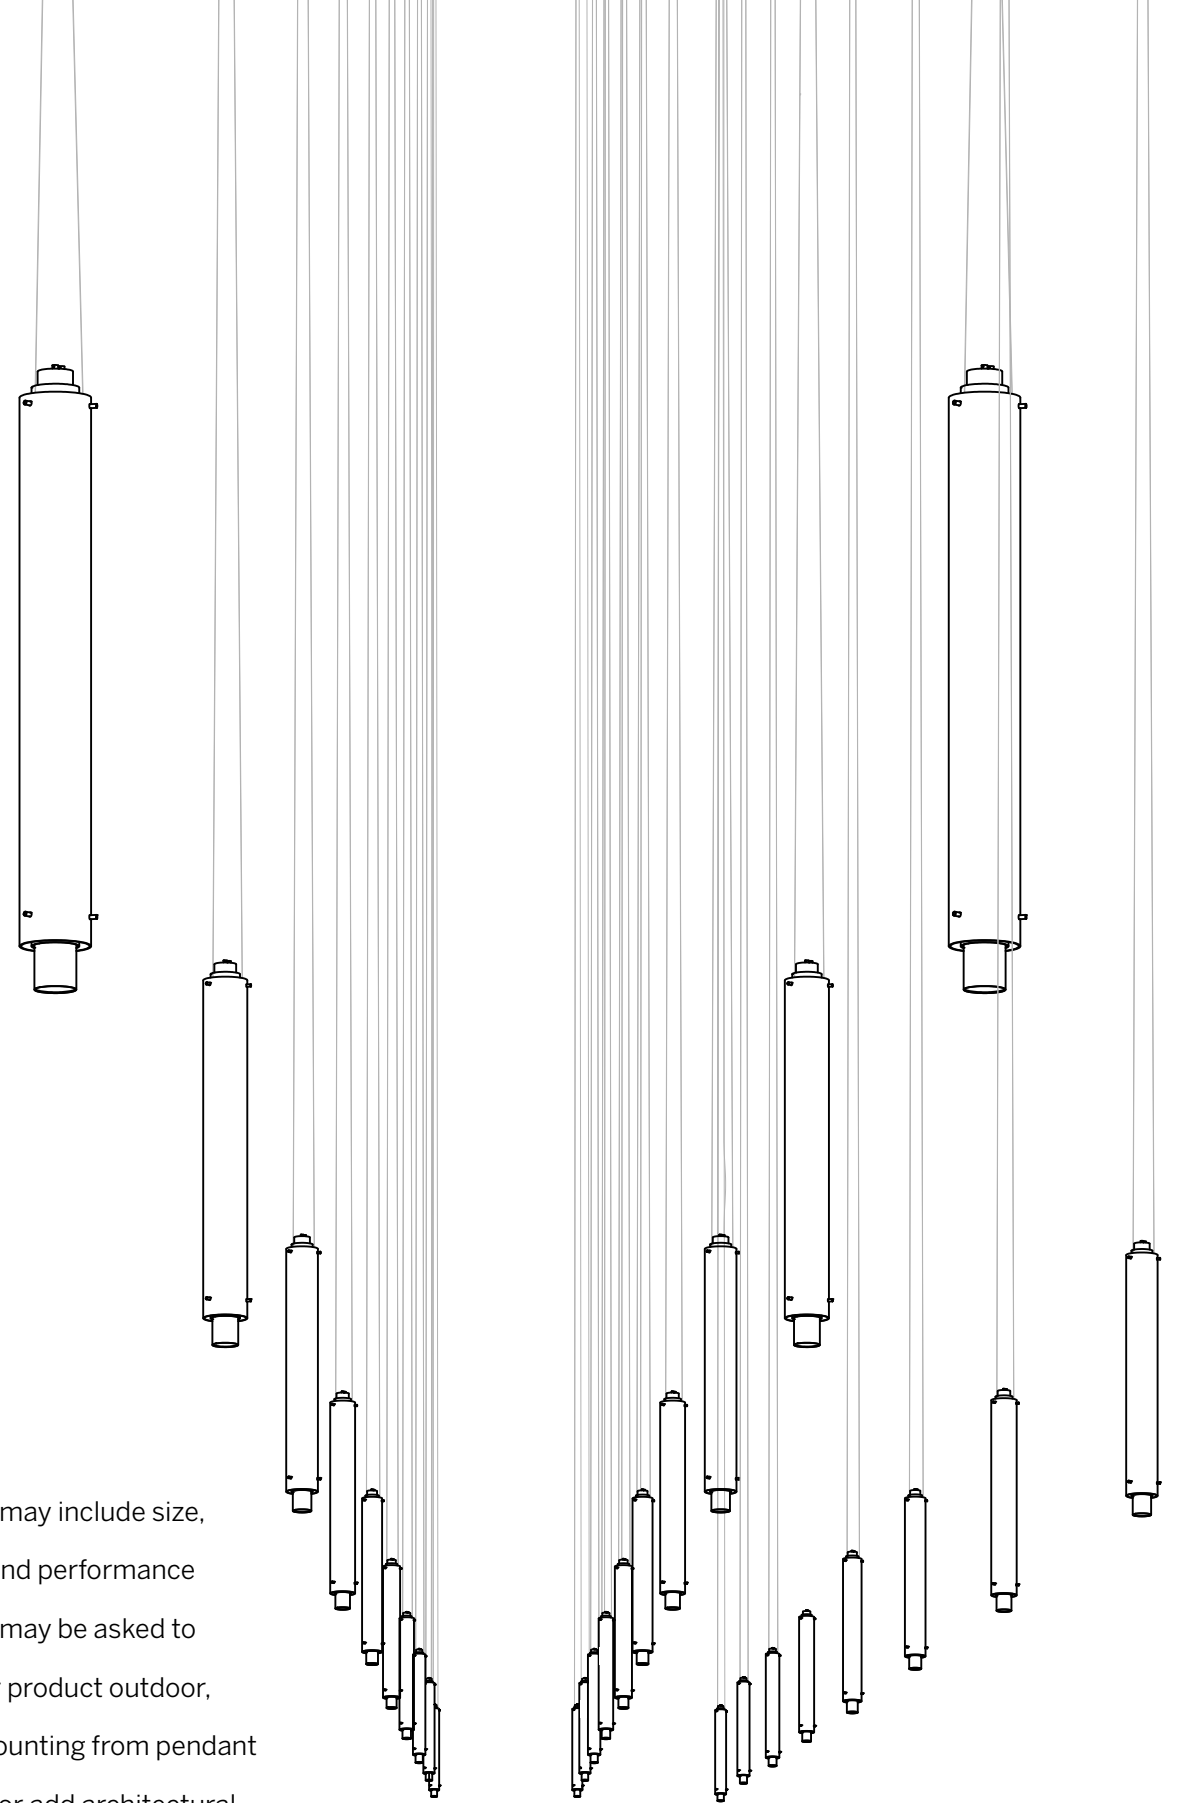

Custom

Often a truly unique product is required to accommodate differing scale spaces, and lighting applications while maintaining a common appearance and language.

ALM will produce custom lighting products to fit most commercial projects while maintaining a budget.

- Larger or smaller scale
- Outdoor versions of indoor products
- Adding separately controlled uplight or downlight components
- Designed hanging structures for single or multiple products
- Color changing or dynamic white light
- Finish or material changes to match or contrast architectural elements
- Standard, modified and or complete custom





Technology

ALM utilizes the same state-of-the-art and fully supported LED solutions as Whitegoods and other Inter-lux products in order to maintain a consistency of performance and appearance throughout the project. Regardless of which product in the ALM and Whitegoods lines are utilized, the same high-standards

are applied, bringing you consistency of CRI, lumen output, dimming characteristics and performance data. Look for the Inter-lux CV or CC LED board data on all linear products, as well as the Cree LED reference to ensure that you are adequately matching your LED products.

Linear LED

- Replaceable boards for sustainability.
- Available in any continuous length to accommodate exacting installations.
- Multiple wattages and lumen output for maximum flexibility within any application.
- 90 + CRI.
- 3 step MacAdam.
- Three standard color temperatures 3000K, 3500K, 4000K.
- Compatible with all common dimmer and control standards.
- High efficiency design delivers more lumens per watt.
- Consistent throughout ALM products for color and performance consistency.
- 5-year warranty.



For discrete LED engine requirements, ALM standardizes on the latest state-of-the-art devices, and maintains consistency throughout the range, as well as matching with other Inter-lux Brand offerings.

Contents

ceiling



Stick M 21

pendant



Arc 65 25



Arc 100 27



Aura 31



Aline 70 33




Delta 40 34



Delta 50 36



Eclipse 50 39



Frame 50 41



Frame 70 43



Gran Fuse 45



Linea 50 47



Ring 65 49

pendant



Ring 100 51



Secant 50 53



Step 55



Step RC 57



Stick AT 59



Stick MT 61



Stick M 63



Wing AR 65

surface




Aline 70 67



Aura 71



Delta 40 73



Delta 50 75



Eclipse 50 77



Frame 50 79



Frame 70 81




Linea 50 83

Contents

surface



Secant 50 85



Step 87



Step RC 89



Wing AR 91

wall



City Indoor 95



Sigma Indoor 97



Wedge Indoor 99

outdoor



City Outdoor 103



Sigma Outdoor 105



Wedge Outdoor 107





Ceiling





Stick M

CEILING
Direct illumination

Model 1593

Type	
C	Ceiling
Size	
12	12.0" (305mm)
Custom	
Wattage ^{1,2}	
M	8.4W (1310lm)
H	12.6W (1710lm)
Color Temp	
30	3000
35	3500
40	4000
Voltage	
U	120/277 Volt
Driver	
RD	Remote
ID	Integral
Control - (RD/ID)	
S	Non-dim
D010	0-10V 1%
ECO30W	EldoLED 0-10V 1% (remote only) Lutron Hi-lume 1% EcoSystem (remote only)
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser	
SA	Satin clear acrylic
Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color
Notes	
1	Nominal lumens value specified
2	Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W
3	90+ CRI standard

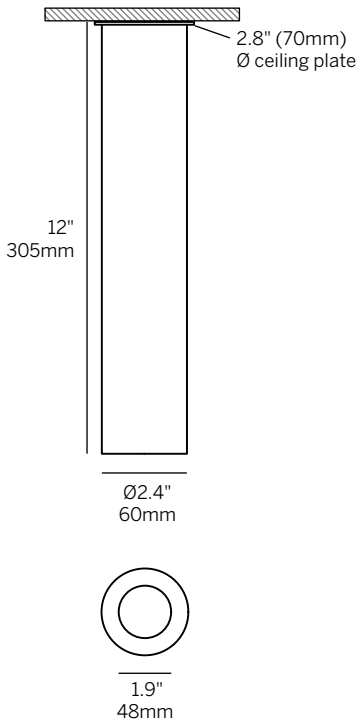

index

technical
information

ALM reserves the right to change any information without prior notice.



inter-lux.com/alm 22



Pendant



Arc 65

PENDANT

Direct, indirect or direct-indirect illumination

Model 1694¹

Type

P Pendant

Size

Specify radius
Specify length
For customized shapes, please include a layout drawing or advise desired shape

Wattage^{2,3}

Direct ⁴	Indirect ⁵
LD	LI
3 W/ft (400 lm/ft)	3 W/ft (400 lm/ft)
10 W/m (1,335 lm/m)	10 W/m (1,335 lm/m)
MD	MI
6 W/ft (743 lm/ft)	6 W/ft (743 lm/ft)
20 W/m (2,475 lm/m)	20 W/m (2,475 lm/m)

XD-No Direct XI-No Indirect

Color Temp⁶

30	3000
35	3500
40	4000

Voltage

U 120/277 Volt

Driver

RD Remote

Control - RD

S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW	Satin opal acrylic
CB	Aluminum-painted to match the fixture

Diffuser Top

SA	Satin clear acrylic
CT	Aluminum-painted to match the fixture

Finish⁷

19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting

SC Straight cables

Circuit



CS	Circuit - Single
CD	Circuit - Dual

Power Cable⁸

CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes

- 1 Separately specify any downlighting elements
- 2 Nominal lumens value specified
- 3 Linear LED board, constant voltage 24 Volt
- 4 For no Direct light specify XD
- 5 For no Indirect light specify XI
- 6 90+ CRI standard
- 7 Canopy finish matches housing
- 8 96" standard cable length

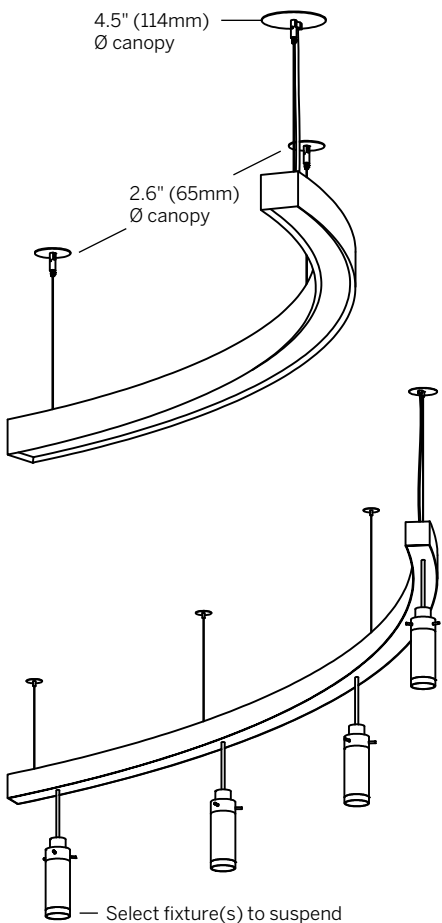

index

technical
information

ALM reserves the right to change any information without prior notice.



inter-lux.com/alm 26



Arc 100

PENDANT

Direct, indirect or direct-indirect illumination

Model 1695¹

Type

P Pendant

Size

Specify radius
Specify length
For customized shapes, please include a layout drawing or advise desired shape

Wattage^{2,3}

Direct⁴

LD
3 W/ft (400 lm/ft)
10 W/m (1,335 lm/m)
MD
6 W/ft (743 lm/ft)
20 W/m (2,475 lm/m)

Indirect⁵

LI
3 W/ft (400 lm/ft)
10 W/m (1,335 lm/m)
MI
6 W/ft (743 lm/ft)
20 W/m (2,475 lm/m)

XD-No Direct

XI-No Indirect

Color Temp⁶

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V 10%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic
CB Aluminum-painted to match the fixture

Diffuser Top

SA Satin clear acrylic
CT Aluminum-painted to match the fixture

Finish⁷

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting

SC Straight cables

Circuit



CS Circuit - Single
CD Circuit - Dual

Power Cable⁸

CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes

- 1 Separately specify any downlighting elements
- 2 Nominal lumens value specified
- 3 Linear LED board, constant voltage 24 Volt
- 4 For no Direct light specify XD
- 5 For no Indirect light specify XI
- 6 90+ CRI standard
- 7 Canopy finish matches housing
- 8 96" standard cable length

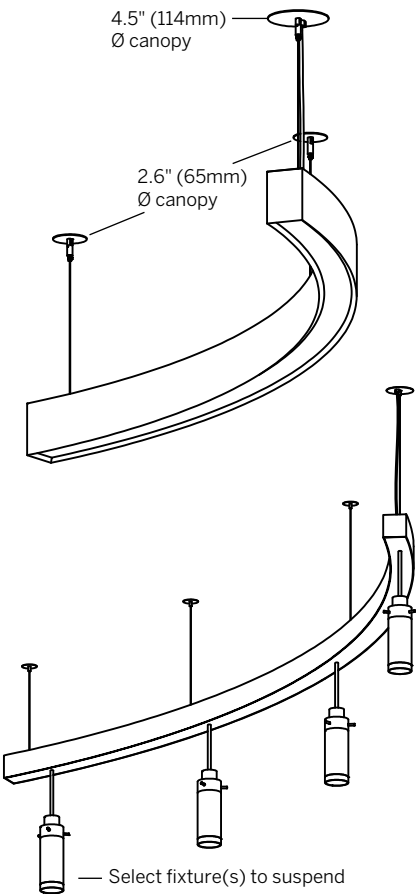



Aura

PENDANT

Direct illumination with indirect glow

Model 1520

Type	
P	Pendant

Size	
15	15.6" (396mm)
18	18.6" (472mm)
22	22.6" (574mm)
25	25.6" (651mm)
30	30.0" (763mm)
36	36.0" (915mm)
Custom	

Wattage ^{1,2}	
15"	
L	8W (1065lm)
M	16W (1980lm)
18"	
L	11W (1465lm)
M	22W (2725lm)
22"	
L	16W (2135lm)
M	32W (3965lm)
25"	
L	24W (3200lm)
M	48W (5945lm)
30"	
L	38W (5065lm)
M	76W (9410lm)
36"	
L	56W (7465lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver ^{4,5}	
RD	Remote
ID	Integral

Control - (RD/ID)	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom	
SW	Satin opal acrylic


Diffuser Top	
SA	Satin clear acrylic

Finish ⁶	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
CE	Center canopy

Power Cable ⁷	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard
4	Remote driver for 15" and 18" sizes
5	Integral or remote driver for 22", 25", 30" and 36" sizes
6	Canopy finish matches housing
7	96" standard cable length

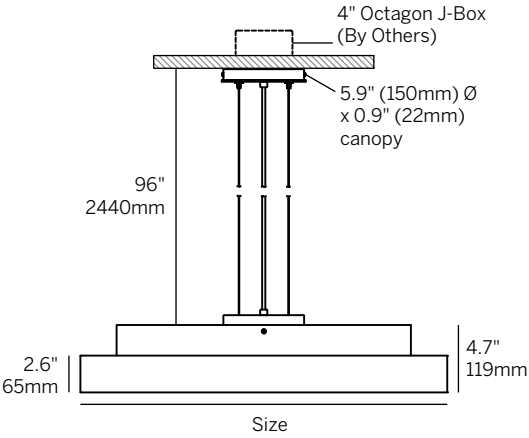

index

technical
information





Aline 70

PENDANT

Direct or direct-indirect illumination

Model 1550

Type

P Pendant

Size

48 49.1" (1246mm)
60 60.9" (1547mm)
72 72.8" (1848mm)
84 84.6" (2149mm)
Custom

Wattage^{1,2}

Direct

48"
LD 12W (1600lm)
MD 24W (2970lm)

Indirect³

LI 12W (1600lm)
MI 24W (2970lm)

60"

LD 15W (2000lm)
MD 30W (3715lm)
72"

LI 15W (2000lm)
MI 30W (3715lm)

LD 18W (2400lm)
MD 36W (4460lm)

LI 18W (2400lm)
MI 36W (4460lm)

84"

LD 21W (2800lm)
MD 42W (5200lm)

LI 21W (2800lm)
MI 42W (5200lm)

XI-No Indirect

Color Temp⁴

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V 10%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

SA Satin clear acrylic
CT Aluminum-painted to match the fixture

Finish⁵

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting

SC Straight cables

Circuit




CS Circuit - Single
CD Circuit - Dual

Power Cable^{6,2}

CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 For no indirect light specify XI
- 4 90+ CRI standard
- 5 Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
- 6 96" standard cable length

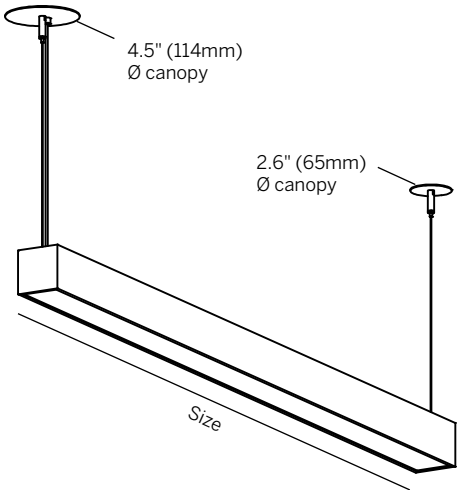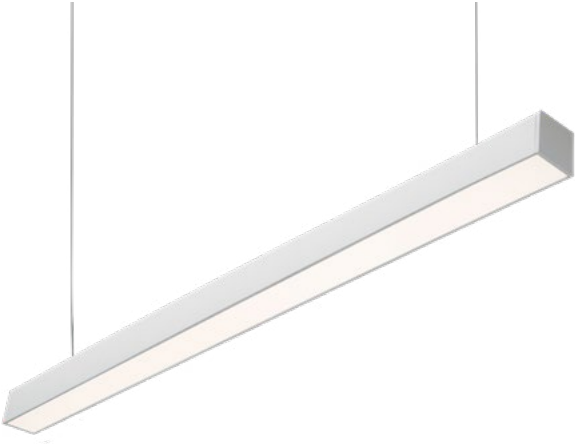



Delta 40



PENDANT

Direct illumination with indirect glow

Model 1770

Type	
P	Pendant
Size	
26	26.4" (670mm)
38	38.2" (971mm)
50	50.0" (1271mm)
Custom	
Wattage ^{1,2}	
26"	
L	6W (800lm)
M	12W (1485lm)
38"	
L	9W (1200lm)
M	18W (2230lm)
50"	
L	12W (1600lm)
M	24W (2970lm)
Color Temp ³	
30	3000
35	3500
40	4000
Voltage	
U	120/277 Volt
Driver	
RD	Remote
Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic
Finish ⁴	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color
Mounting	
PC	Power cable
Power Cable ⁵	
CC	Clear insulated cable
Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard
4	Canopy finish matches housing
5	96" standard power cable length

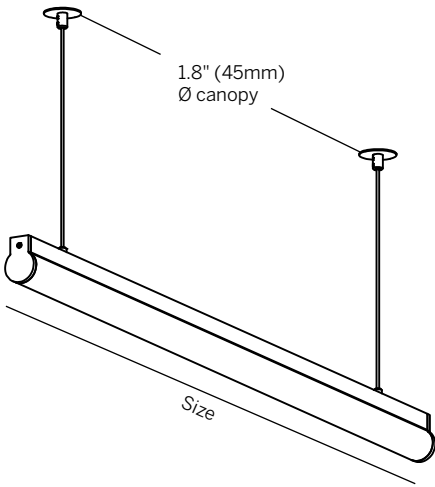



Delta 50

PENDANT

Direct illumination with indirect glow

Model 1771

Type	
P	Pendant

Size	
26	26.4" (670mm)
38	38.2" (971mm)
50	50.0" (1271mm)
Custom	

Wattage ^{1,2}	
26"	
L	6W (800lm)
M	12W (1485lm)
38"	
L	9W (1200lm)
M	18W (2230lm)
50"	
L	12W (1600lm)
M	24W (2970lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem



Diffuser	
SA	Satin clear acrylic

Finish ⁴	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
PC	Power cable

Power Cable ⁵	
CC	Clear insulated cable

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard
4	Canopy finish matches housing
5	96" standard power cable length

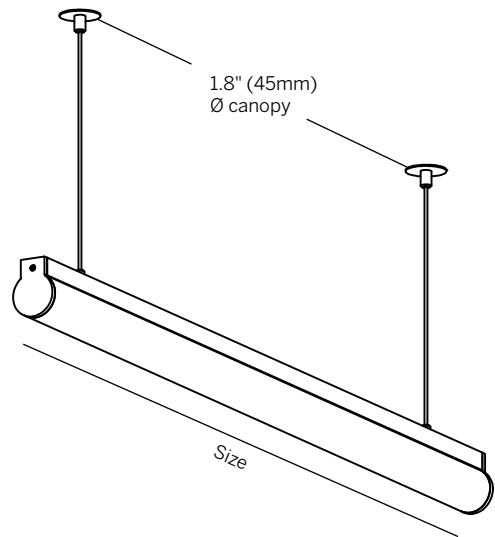



Eclipse 50

PENDANT

Direct, indirect or direct-indirect illumination

Model 1670

Type	
P	Pendant
Size	
24	24.8" (631mm)
36	36.3" (921mm)
48	47.7" (1211mm)
60	59.1" (1500mm)
72	70.5" (1790mm)
Custom	

Wattage¹²

Direct ³	Indirect ⁴
24"	
LD 18W (2400lm)	LI 18W (2400lm)
MD 36W (4460lm)	MI 36W (4460lm)
36"	
LD 27W (3600lm)	LI 27W (3600lm)
MD 54W (6685lm)	MI 54W (6685lm)
48"	
LD 36W (4800lm)	LI 36W (4800lm)
MD 72W (8915lm)	MI 72W (8915lm)
60"	
LD 45W (6000lm)	LI 45W (6000lm)
MD 90W (11145lm)	MI 90W (11145lm)
72"	
LD 54W (7200lm)	LI 54W (7200lm)
MD 108W (13375lm)	MI 108W (13375lm)

XD-No Direct	XI-No Indirect
--------------	----------------

Color Temp ⁵	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem
X	If integral driver is selected

Control-ID (in canopy - if selected)	
S	Non-dim
D010	0-10V 1%
X	If remote driver is selected

Diffuser Bottom	
SW	Satin opal acrylic
CB	Aluminum-painted to match the fixture

Diffuser Top	
SA	Satin clear acrylic
CT	Aluminum-painted to match the fixture


Finish ⁶	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
SC	Straight cables - remote driver
CERD	Center canopy - remote driver
CEID	Center canopy - integral driver


Circuit	
CS	Circuit - Single
CD	Circuit - Dual

Power Cable ⁷	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable


Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	For no Direct light specify XD
4	For no Indirect light specify XI
5	90+ CRI standard
6	Canopy finish matches housing
7	96" standard cable length

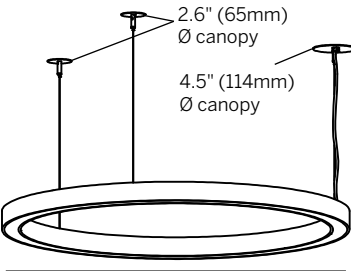


Size
Straight cables with remote driver

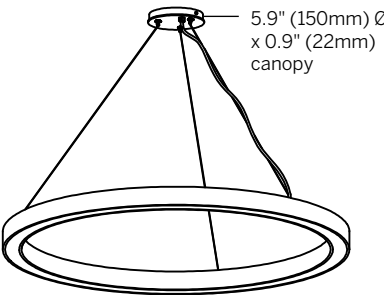

Center canopy with remote driver

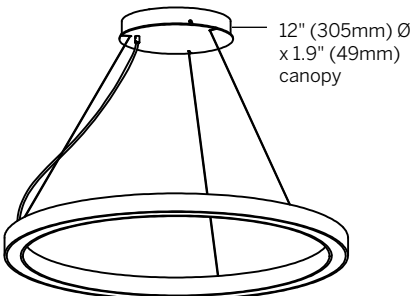

Center canopy with integral driver



Section



Frame 50

PENDANT

Direct or Direct-Indirect illumination

Model 1546

Type	
P	Pendant

Size	
26	26.0" [662mm]
38	37.9" [963mm]
50	49.7" [1262mm]
Custom	

Wattage^{1,2}

Direct ³	Indirect ⁴
26"	
LD 9W (1200lm)	LI 9W (1200lm)
MD 18W (2230lm)	MI 18W (2230lm)
38"	
LD 12W (1600lm)	LI 12W (1600lm)
MD 24W (2970lm)	MI 24W (2970lm)
50"	
LD 15W (2000lm)	LI 15W (2000lm)
MD 30W (3715lm)	MI 30W (3715lm)

XD-No Direct	XI-No Indirect
--------------	----------------

Color Temp ⁵	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral (in canopy)

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Control - ID (in canopy)	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom	
SA	Satin clear acrylic
CT	Aluminum – painted to match the fixture



Finish ⁵	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
SCRD	Straight cables - remote driver
SCID	Straight cables - driver in canopy
CERD	Center canopy - remote driver
CEID	Center canopy - driver in canopy


Circuit	
CS	Circuit - Single
CD	Circuit – Dual

Power Cable ⁶	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable


Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	For no Direct light specify XD
4	For no Indirect light specify X
5	90+ CRI standard
6	Canopy finish matches housing
	For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
7	96" standard cable length

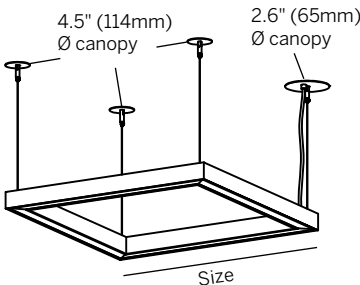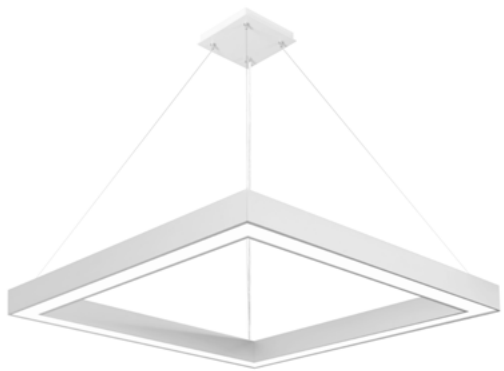


Straight cables with remote driver

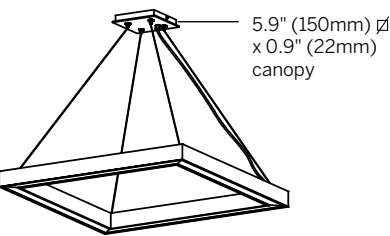

Center canopy with remote driver

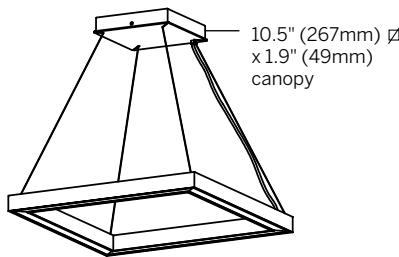

Center canopy with integral driver



Section

index

technical
information



Frame 70

PENDANT

Direct illumination

Model 1545

Type

P Pendant

Size

24 24.0" (610mm)
36 36.0" (914mm)
48 48.0" (1219mm)
Custom

Wattage^{1,2}

24" L 20W (2665lm)
M 40W (4955lm)
36"

L 32W (4265lm)
M 64W (7925lm)
48"

L 44W (5865lm)
M 88W (10895lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V 1%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

Finish⁴

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting


SC Straight cables
CE Center canopy

Power Cable⁵


CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes


- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard
- 4 Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
96" standard cable length
- 5

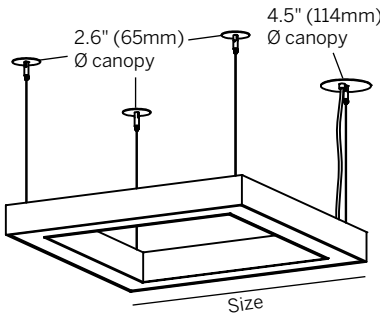


Straight cables with remote driver

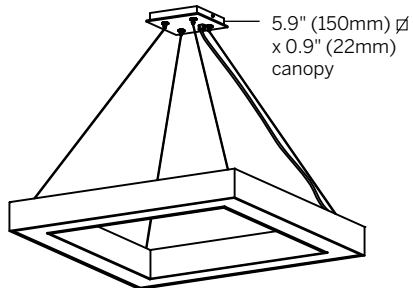

Center canopy with remote driver

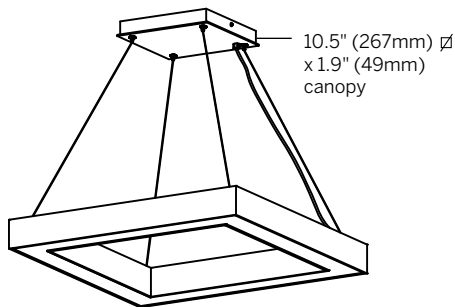

Center canopy with integral driver



Section

index

technical
information



Gran Fuse

PENDANT

General illumination, general illumination with downlight

Model 1575

Type

P Pendant

Size (general light only)

38 38.2" (971mm)
50 50.2" (1276mm)
62 62.2" (1581mm)
Custom

Size (general with downlight)

43 42.7" (1086mm)
55 54.7" (1390mm)
67 66.7" (1695mm)
Custom

Wattage (general illumination)^{1,2} 38/43"

L 24W (3200lm)
50/55"
L 36W (4800lm)
62/67"
L 48W (6400lm)

Wattage (downlight)³

M 8.4W (1310lm)
H 12.6W (1710lm)
X No Downlight

Color Temp⁴

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote
ID Integral

Control - (RD/ID - General)

S Non-dim
D010 0-10V 1%
L3DAE Lutron Hi-lume 1% EcoSystem (remote only)
L3DOE Hi-lume Premier 0.1% EcoSystem (remote only)

Control (RD/ID - Downlight)

S Non-dim
D010 0-10V 1%
ECO30W EldoLED 0-10V 1% (remote only)
Lutron Hi-lume 1% EcoSystem
PEQ0 Lutron Hi-lume Premier 0.1% EcoSystem
X No Downlight

Diffuser

AA Clear acrylic
SW Satin opal acrylic

Finish⁵

12 Satin nickel
19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting⁶

CE Center canopy

Downlight options


D Flush downlight
CL Extended cylinder light
X No Downlight

Power Cable⁷

CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes

- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 Downlight LED module, constant current 18 Volt
500 mA - 8.4 W, 700 mA - 12.6 W
- 4 90+ CRI standard
- 5 Canopy finish matches housing
- 6 Single canopy with multiple fixtures suspension available on request
- 7 96" standard cable length

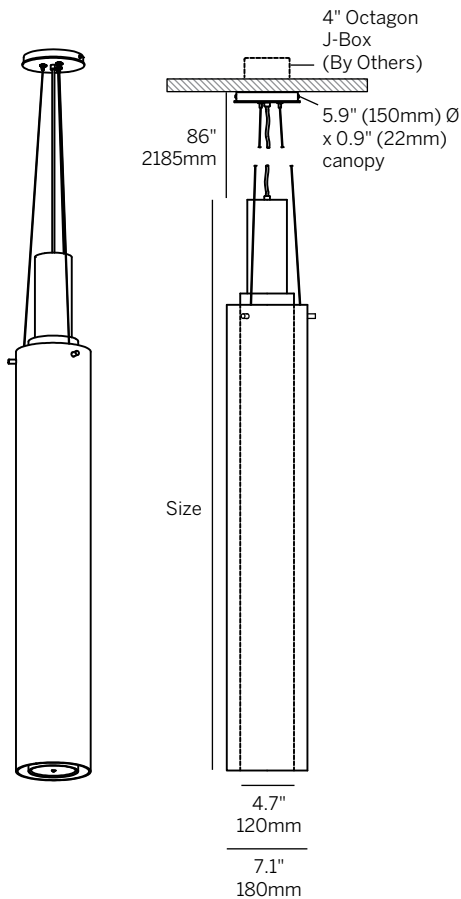

index

technical
information

ALM reserves the right to change any information without prior notice.



inter-lux.com/alm 46



Linea 50

PENDANT

Direct or direct-indirect illumination

Model 1672

Type	
P	Pendant

Size	
48	48.6" (1234mm)
60	60.4" (1535mm)
72	72.3" (1836mm)
84	84.1" (2137mm)
Custom	

Wattage ^{1,2}	
Direct	Indirect ³
48"	
LD 12W (1600lm)	LI 12W (1600lm)
MD 24W (2970lm)	MI 24W (2970lm)
60"	
LD 15W (2000lm)	LI 15W (2000lm)
MD 30W (3715lm)	MI 30W (3715lm)
72"	
LD 18W (2400lm)	LI 18W (2400lm)
MD 36W (4460lm)	MI 36W (4460lm)
84"	
LD 21W (2800lm)	LI 21W (2800lm)
MD 42W (5200lm)	MI 42W (5200lm)
	XI-No Indirect

Color Temp ⁴	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom	
SW	Satin opal acrylic

Diffuser Top	
SA	Satin clear acrylic
CT	Aluminum-painted to match the fixture




Finish ⁵	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
PC	Power cable

Circuit	
CS	Circuit - Single
CD	Circuit - Dual

Power Cable ⁶	
CC	Clear insulated cable

- Notes**
- 1 Nominal lumens value specified
 - 2 Linear LED board, constant voltage 24 Volt
 - 3 For no Indirect light specify XI
 - 4 90+ CRI standard
 - 5 Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
 - 6 96" standard power cable length

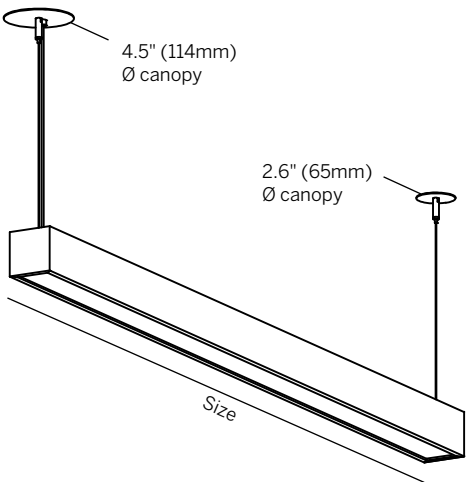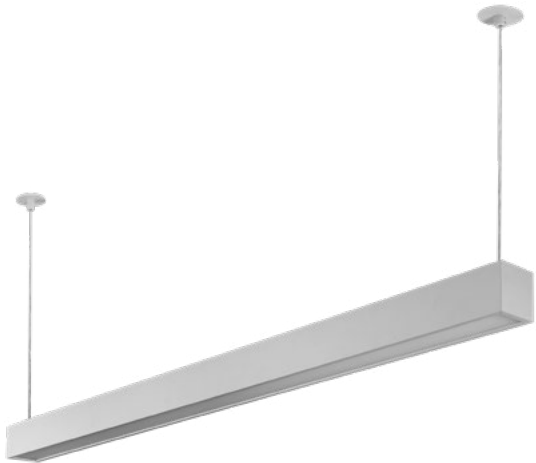

Ring 65

PENDANT

Direct, indirect or direct-indirect illumination

Model 1691

Type	
P	Pendant

Size	
24	25.5" (647mm)
36	36.9" (938mm)
48	48.4" (1229mm)
60	59.8" (1519mm)
72	71.2" (1808mm)
Custom	

Wattage^{1,2}

Direct ³	Indirect ⁴
24"	
LD 18W (2400lm)	LI 18W (2400lm)
MD 36W (4460lm)	MI 36W (4460lm)
36"	
LD 27W (3600lm)	LI 27W (3600lm)
MD 54W (6685lm)	MI 54W (6685lm)
48"	
LD 36W (4800lm)	LI 36W (4800lm)
MD 72W (8915lm)	MI 72W (8915lm)
60"	
LD 45W (6000lm)	LI 45W (6000lm)
MD 90W (11145lm)	MI 90W (11145lm)
72"	
LD 54W (7200lm)	LI 54W (7200lm)
MD 108W (13375lm)	MI 108W (13375lm)

XD-No Direct	XI-No Indirect
--------------	----------------

Color Temp ⁵	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem
X	If integral driver is selected

Control-ID (in canopy - if selected)	
S	Non-dim
D010	0-10V 1%
X	If remote driver is selected

Diffuser Bottom	
SW	Satin opal acrylic
CB	Aluminum-painted to match the fixture

Diffuser Top	
SA	Satin clear acrylic
CT	Aluminum-painted to match the fixture





Finish ⁶	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
SC	Straight cables - remote driver
CERD	Center canopy - remote driver
CEID	Center canopy - integral driver

Circuit	
CS	Circuit - Single
CD	Circuit - Dual

Power Cable ⁷	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	For no Direct light specify XD
4	For no Indirect light specify XI
5	90+ CRI standard
6	Canopy finish matches housing
7	96" standard cable length

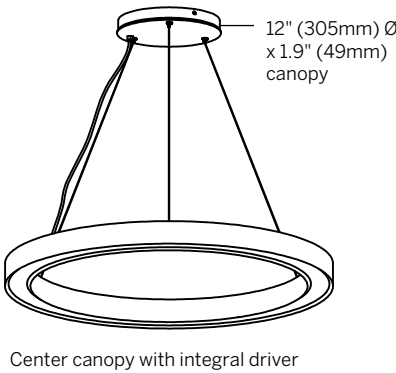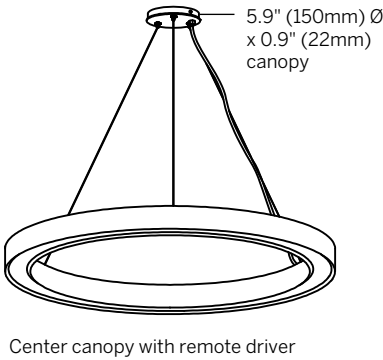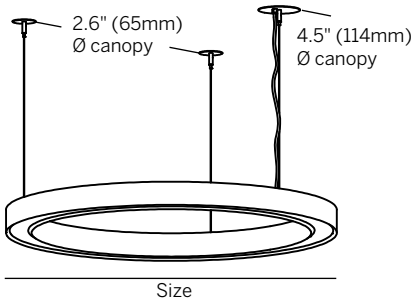

index

technical
information



Ring 100

PENDANT

Direct, indirect or direct-indirect illumination

Model 1692

Type	
P	Pendant

Size	
24	25.5" (647mm)
36	36.9" (938mm)
48	48.4" (1229mm)
60	59.8" (1519mm)
72	71.2" (1808mm)
Custom	

Wattage^{1,2}

Direct ³ 24"	Indirect ⁴
LD 18W (2400lm) MD 36W (4460lm)	LI 18W (2400lm) MI 36W (4460lm)
36"	
LD 27W (3600lm) MD 54W (6685lm)	LI 27W (3600lm) MI 54W (6685lm)
48"	
LD 36W (4800lm) MD 72W (8915lm)	LI 36W (4800lm) MI 72W (8915lm)
60"	
LD 45W (6000lm) MD 90W (11145lm)	LI 45W (6000lm) MI 90W (11145lm)
72"	
LD 54W (7200lm) MD 108W (13375lm)	LI 54W (7200lm) MI 108W (13375lm)

XD-No Direct	XI-No Indirect
--------------	----------------

Color Temp ⁵	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem
X	If integral driver is selected

Control-ID (in canopy - if selected)	
S	Non-dim
D010	0-10V 1%
X	If remote driver is selected

Diffuser Bottom	
SW	Satin opal acrylic
CB	Aluminum-painted to match the fixture

Diffuser Top	
SA	Satin clear acrylic
CT	Aluminum-painted to match the fixture


Finish ⁶	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
SC	Straight cables - remote driver
CERD	Center canopy - remote driver
CEID	Center canopy - integral driver


Circuit	
CS	Circuit - Single
CD	Circuit - Dual

Power Cable ⁷	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable


Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	For no Direct light specify XD
4	For no Indirect light specify XI
5	90+ CRI standard
6	Canopy finish matches housing
7	96" standard cable length

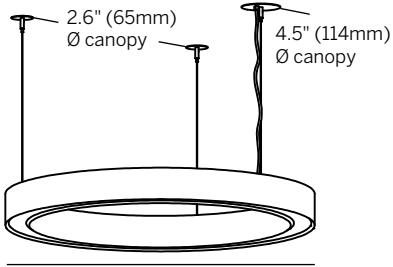


Size
Straight cables with remote driver

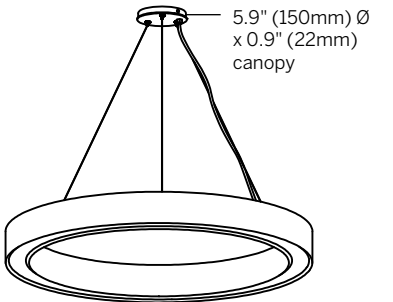

Center canopy with remote driver

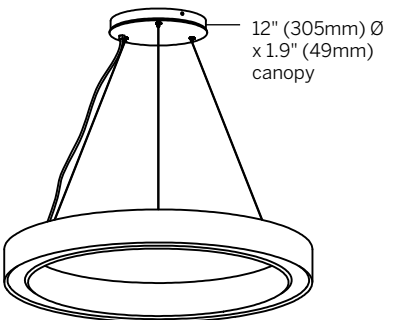

Center canopy with integral driver



Section

index

technical
information





Secant 50

PENDANT

Direct, indirect or direct-indirect illumination

Model 1671

Type	
P	Pendant
Size	
24	24.8" (631mm)
36	36.3" (921mm)
48	47.7" (1211mm)
60	59.1" (1500mm)
72	70.5" (1790mm)
Custom	

Wattage^{1,2}

Direct ³	Indirect ⁴
24"	
LD 16W (2135lm)	LI 16W (2135lm)
MD 32W (3965lm)	MI 32W (3965lm)
36"	
LD 24W (3200lm)	LI 24W (3200lm)
MD 48W (5945lm)	MI 48W (5945lm)
48"	
LD 32W (4265lm)	LI 32W (4265lm)
MD 64W (7925lm)	MI 64W (7925lm)
60"	
LD 40W (5335lm)	LI 40W (5335lm)
MD 80W (9905lm)	MI 80W (9905lm)
72"	
LD 48W (6400lm)	LI 48W (6400lm)
MD 96W (11890lm)	MI 96W (11890lm)

XD-No Direct	XI-No Indirect
--------------	----------------

Color Temp ⁵	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Lutron Hi-lume Premier 0.1% EcoSystem
X	If integral driver is selected

Control-ID (in canopy)	
S	Non-dim
D010	0-10V 1%
X	If remote driver is selected

Diffuser Bottom	
SW	Satin opal acrylic
CB	Aluminum-painted to match the fixture

Diffuser Top	
SA	Satin clear acrylic
CT	Aluminum-painted to match the fixture


Finish ⁶	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
SC	Straight cables - remote driver
CERD	Center canopy - remote driver
CEID	Center canopy - integral driver


Circuit	
CS	Circuit - Single
CD	Circuit - Dual

Power Cable ⁷	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable


Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	For no Direct light specify XD
4	For no Indirect light specify XI
5	90+ CRI standard
6	Canopy finish matches housing
7	96" standard cable length

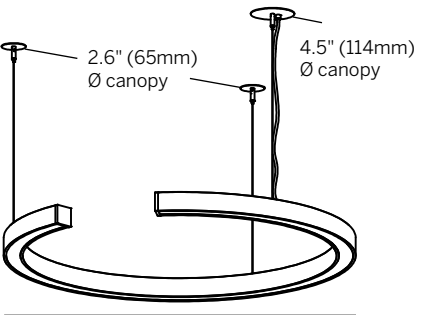


Straight cables with remote driver

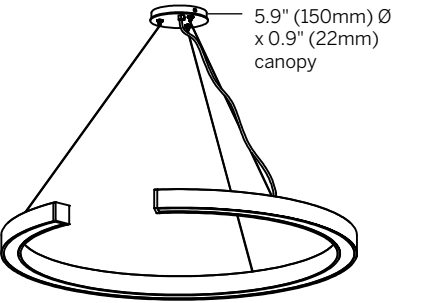

Center canopy with remote driver

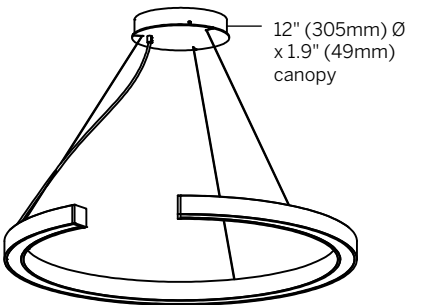

Center canopy with integral driver



Section





Step

PENDANT

Direct illumination with indirect glow

Model 1540

Type	
P	Pendant

Size	
24	24.0" (610mm)
28	28.0" (711mm)
32	32.0" (813mm)
36	36.0" (914mm)
Custom	

Wattage ^{1,2}	
24"	
L	28W (3735lm)
28"	
L	40W (5335lm)
32"	
L	54W (7200lm)
36"	
L	77W (10265lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral (inside fixture)

Control - (RD/ID)	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom	
SW	Satin opal acrylic



Diffuser Top	
CPS	Clear polycarbonate - sanded both sides

Finish ⁴	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
CE	Center canopy

Power Cable ⁵	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard
4	Canopy finish matches housing For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
5	96" standard cable length

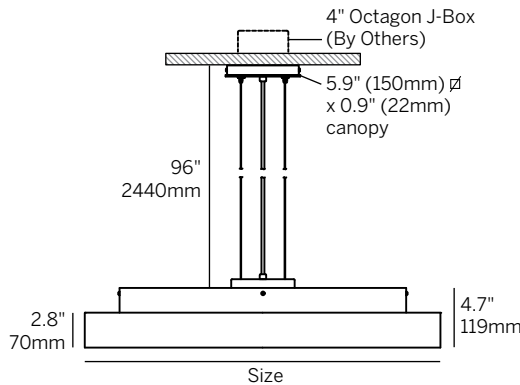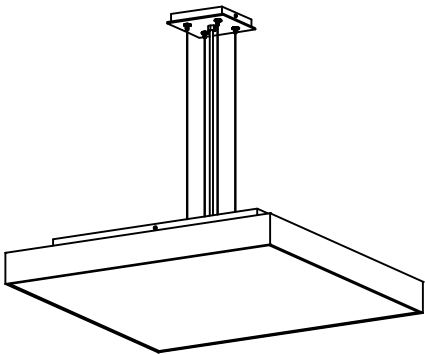



Step RC

PENDANT

Direct illumination with indirect glow

Model 1541

Type	
P	Pendant

Size	
24	24.0" (610mm)
28	28.0" (711mm)
32	32.0" (813mm)
36	36.0" (914mm)
48	48.0" (1219mm)
Custom	

Wattage ^{1,2}	
24"	
L	8W (1065lm)
M	16W (1980lm)
28"	
L	10W (1335lm)
M	20W (2475lm)
32"	
L	12W (1600lm)
M	24W (2970lm)
36"	
L	14W (1865lm)
M	28W (3465lm)
48"	
L	20W (2665lm)
M	40W (4955lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral

Control - (RD/ID)	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom	
SW	Satin opal acrylic




Diffuser Top	
CPS	Clear polycarbonate - sanded both sides

Finish ⁴	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
SC	Straight cables

Power Cable ⁵	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard
4	Canopy finish matches housing For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
5	96" standard cable length

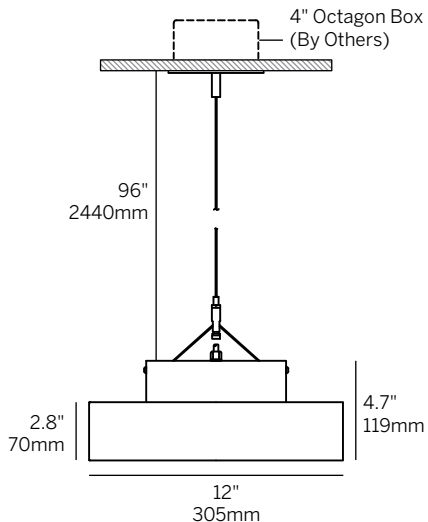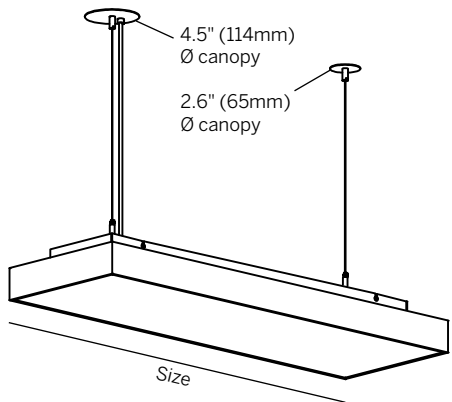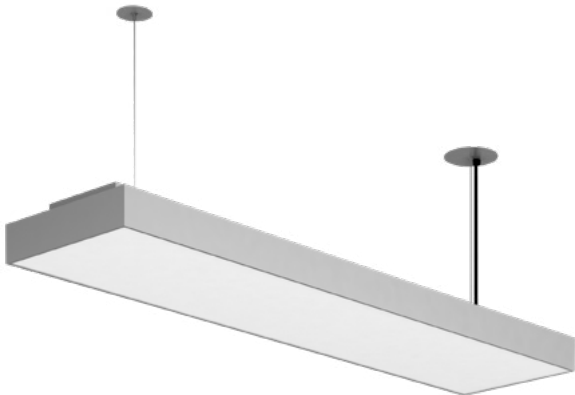

index

technical
information

ALM reserves the right to change any information without prior notice.



inter-lux.com/alm 58



Stick AT

PENDANT
General illumination

Model 1591

AT	Acrylic top
----	-------------

Type	
P	Pendant

Size	
18	18.0" (457mm)
22	22.0" (559mm)
Custom	

Wattage ^{1,2}	
M	8.4W (1310lm)
H	12.6W (1710lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 1%
ECO30W	EldoLED 0-10V 1%
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem



Diffuser	
SA	Satin clear acrylic

Finish ⁴	
21	Painted white - RAL 9010 matte
22	Painted custom color

Mounting	
PC	Power cable

Power Cable ⁵	
CC	Clear insulated cable

- Notes**
- 1 Nominal lumens value specified
 - 2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W 90+ CRI standard
 - 3
 - 4 AT fixture and canopy are painted white standard, other colors optional on canopy
 - 5 96" standard power cable length

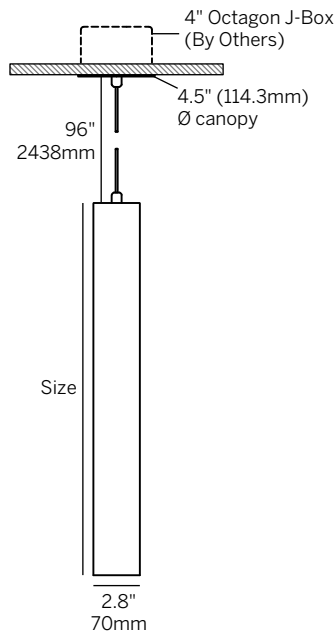



Stick MT

PENDANT
General illumination


Model 1592

MT	Metal top
Type	
P	Pendant
Size	
18	18.0" (457mm)
22	22.0" (559mm)
26	26.0" (660mm)
Custom	
Wattage ^{1,2}	
M	8.4W (1310lm)
H	12.6W (1710lm)
Color Temp ³	
30	3000
35	3500
40	4000
Voltage	
U	120/277 Volt
Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 1%
ECO30W	EldoLED 0-10V 1%
PEQ0	Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic
Finish ⁴	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color
Mounting	
PC	Power cable
Power Cable ⁵	
CC	Clear insulated cable

- Notes**
- 1 Nominal lumens value specified
 - 2 Downlight LED module, constant current 18 Volt 500 mA - 8.4 W, 700 mA - 12.6 W
 - 3 90+ CRI standard
 - 4 Canopy finish matches housing
 - 5 96" standard power cable length

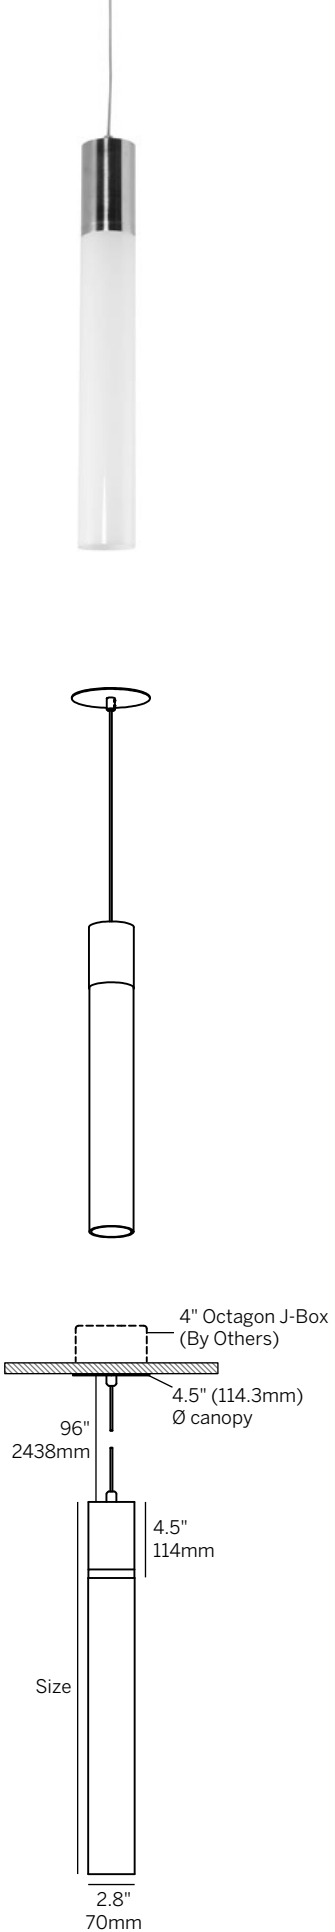



Stick M

PENDANT

Direct illumination

Model 1593

Type

P Pendant

Size

12 12.0" (305mm)
Custom

Wattage^{1,2}

M 8.4W (1310lm)
H 12.6W (1710lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote
ID Integral

Control - (RD/ID)

S Non-dim
D010 0-10V 1%
ECO30W EldoLED 0-10V 1% (remote only)
Lutron Hi-lume 1% EcoSystem (remote only)
PEQ0 Lutron Hi-lume Premier 0.1%
EcoSystem (remote only)

Diffuser

SA Satin clear acrylic

Finish⁴

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting


PC Power cable

Power Cable⁵

CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes

1 Nominal lumens value specified
2 Downlight LED module, constant current 18 Volt
500 mA - 8.4 W, 700 mA - 12.6 W
3 90+ CRI standard
4 Canopy finish matches housing
5 96" standard power cable length

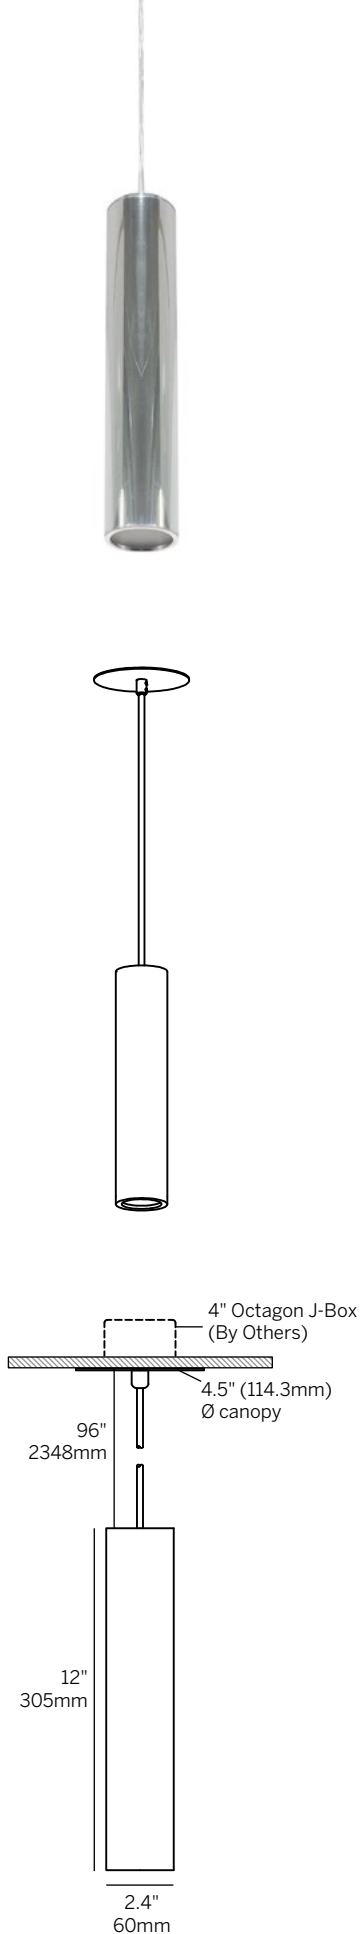

index

technical
information

ALM reserves the right to change any information without prior notice.



inter-lux.com/alm 64



Wing AR

PENDANT

Direct illumination with indirect glow

Model 1821

Type	
P	Pendant

Size	
26	26.0" (660mm)
37	37.0" (940mm)
49	49.0" (1245mm)
Custom	

Wattage ^{1,2}	
26"	
L	6W (800lm)
M	12W (1485lm)
37"	
L	9W (1200lm)
M	18W (2230lm)
49"	
L	12W (1600lm)
M	24W (2970lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem




Diffuser ⁴	
SW	Satin opal acrylic

Finish ⁵	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Mounting	
SC	Straight cables

Power Cable ⁶	
CC	Clear insulated cable (standard)
WC	White cable
BC	Black cable

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard
4	Reflector is opal acrylic
5	Canopy finish matches housing
6	96" standard cable length

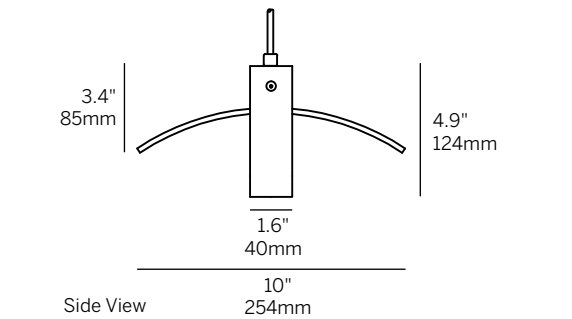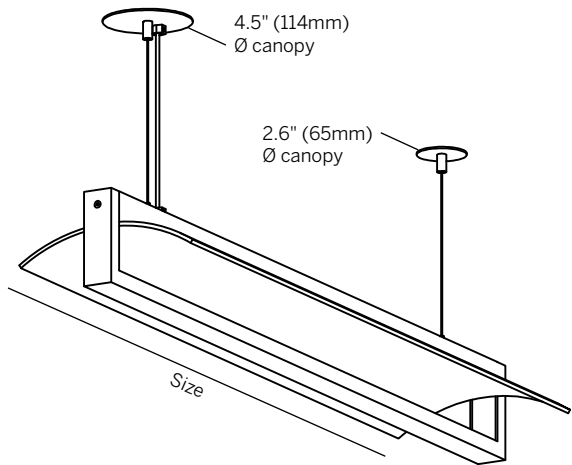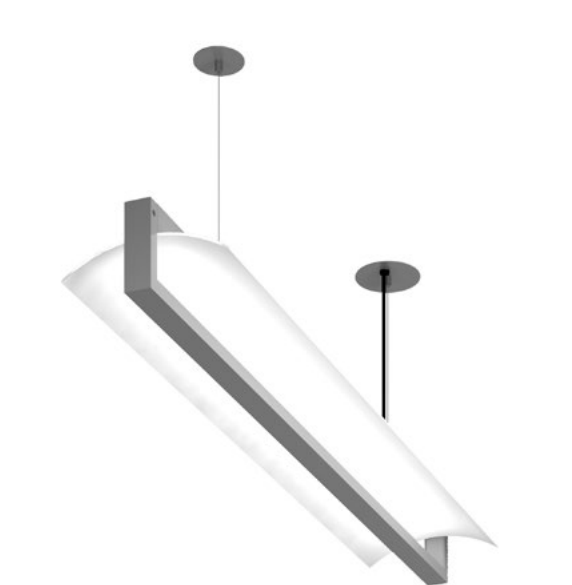

index

technical
information

ALM reserves the right to change any information without prior notice.



inter-lux.com/alm 66



Surface

Aline 70

SURFACE
Direct illumination

Model 1550

Type	
S	Surface

Size	
48	49.1" (1246mm)
60	60.9" (1547mm)
72	72.8" (1848mm)
84	84.6" (2149mm)
Custom	

Wattage ^{1,2}	
48"	
L	12W (1600lm)
M	24W (2970lm)
60"	
L	15W (2000lm)
M	30W (3715lm)
72"	
L	18W (2400lm)
M	36W (4460lm)
84"	
L	21W (2800lm)
M	42W (5200lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt




Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom	
SW	Satin opal acrylic

Finish	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

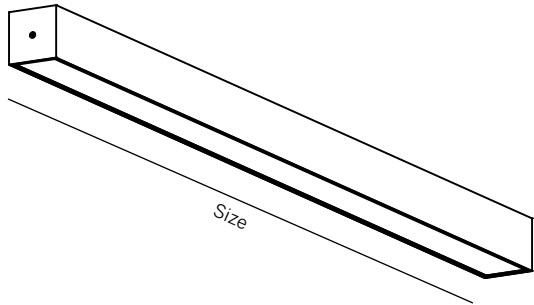
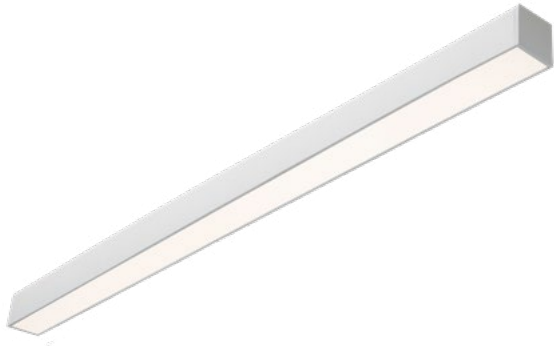




Aura

SURFACE

Direct illumination with indirect glow

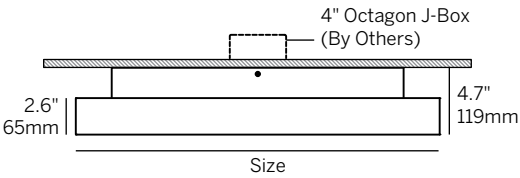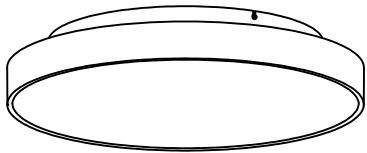

Model 1520

Type

S Surface

Size

15 15.6" (396mm)
18 18.6" (472mm)
22 22.6" (574mm)
25 25.6" (651mm)
30 30.0" (763mm)
36 36.0" (915mm)
Custom

Wattage^{1,2}

15"
L 8W (1065lm)
M 16W (1980lm)
18"
L 11W (1465lm)
M 22W (2725lm)
22"
L 16W (2135lm)
M 32W (3965lm)
25"
L 24W (3200lm)
M 48W (5945lm)
30"
L 38W (5065lm)
M 76W (9410lm)
36"
L 56W (7465lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver^{4,5}

RD Remote
ID Integral

Control - (RD/ID)

S Non-dim
D010 0-10V 1%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom

SW Satin opal acrylic

Diffuser Top

SA Satin clear acrylic

Finish

19 Painted anodized aluminum - RAL 9006 matte
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Notes

1 Nominal lumens value specified
2 Linear LED board, constant voltage 24 Volt
3 90+ CRI standard
4 Remote driver for 15" and 18" sizes
5 Integral or remote driver for 22", 25", 30" and 36" sizes



Delta 40

SURFACE

Direct illumination with indirect glow

Model 1770

Type	
S	Surface

Size	
26	26.4" (670mm)
38	38.2" (971mm)
50	50.0" (1271mm)
Custom	

Wattage ^{1,2}	
26"	
L	6W (800lm)
M	12W (1485lm)
38"	
L	9W (1200lm)
M	18W (2230lm)
50"	
L	12W (1600lm)
M	24W (2970lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard





Delta 50

SURFACE

Direct illumination with indirect glow

Model 1771

Type	
S	Surface

Size	
26	26.4" (670mm)
38	38.2" (971mm)
50	50.0" (1271mm)
Custom	

Wattage ^{1,2}	
26"	
L	6W (800lm)
M	12W (1485lm)
38"	
L	9W (1200lm)
M	18W (2230lm)
50"	
L	12W (1600lm)
M	24W (2970lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard





Eclipse 50

SURFACE

Direct illumination

Model 1670

Type	
S	Surface

Size	
24	24.8" (631mm)
36	36.3" (921mm)
48	47.7" (1211mm)
60	59.1" (1500mm)
72	70.5" (1790mm)
Custom	

Wattage ^{1,2}	
24"	
L	18W (2400lm)
M	36W (4460lm)
36"	
L	27W (3600lm)
M	54W (6685lm)
48"	
L	36W (4800lm)
M	72W (8915lm)
60"	
L	45W (6000lm)
M	90W (11145lm)
72"	
L	54W (7200lm)
M	108W (13375lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt
RD	Remote



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3D0E	Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom	
SW	Satin opal acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

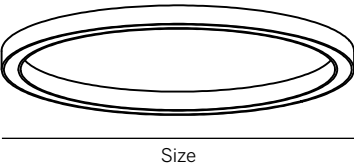






Frame 50

SURFACE
Direct illumination

Model 1546

Type	
S	Surface
Size	
26	26.0" (662mm)
38	37.9" (963mm)
50	49.7" (1262mm)
Custom	
Wattage ^{1,2}	
24"	
L	24W (3200lm)
M	48W (5945lm)
38"	
L	36W (4800lm)
M	72W (8915lm)
50"	
L	48W (6400lm)
M	96W (11888lm)
Color Temp ³	
30	3000
35	3500
40	4000
Voltage	
U	120/277 Volt
Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3D0E	Lutron Hi-lume Premier 0.1% EcoSystem
Diffuser Bottom	
SW	Satin opal acrylic
Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color
Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

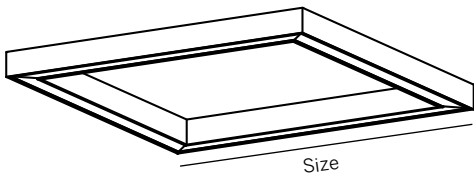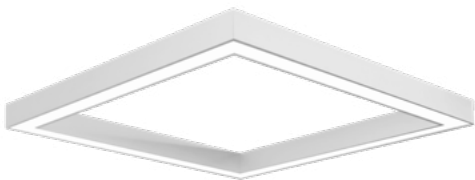

Frame 70

SURFACE

Direct illumination

Model 1545

Type	
S	Surface

Size	
24	24.0" (610mm)
36	36.0" (914mm)
48	48.0" (1219mm)
Custom	

Wattage ^{1,2}	
24"	
L	20W (2665lm)
M	40W (4955lm)
36"	
L	32W (4265lm)
M	64W (7925lm)
48"	
L	44W (5865lm)
M	88W (10895lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom	
SW	Satin opal acrylic

Finish	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

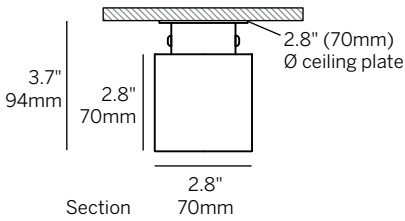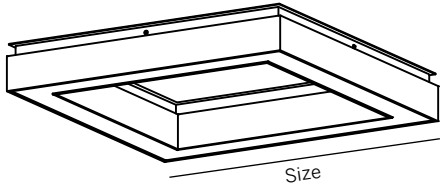



Linea 50

SURFACE

Direct illumination

Model 1672

Type	
S	Surface

Size	
48	48.6" (1234mm)
60	60.4" (1535mm)
72	72.3" (1836mm)
84	84.1" (2137mm)
Custom	

Wattage ^{1,2}	
48"	
L	12W (1600lm)
M	24W (2970lm)
60"	
L	15W (2000lm)
M	30W (3715lm)
72"	
L	18W (2400lm)
M	36W (4460lm)
84"	
L	21W (2800lm)
M	42W (5200lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom	
SW	Satin opal acrylic

Finish	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

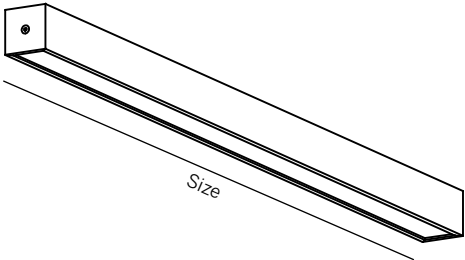



Secant 50

SURFACE

Direct illumination

Model 1671

Type	
S	Surface

Size	
24	24.8" (631mm)
36	36.3" (921mm)
48	47.7" (1211mm)
60	59.1" (1500mm)
72	70.5" (1790mm)
Custom	

Wattage ^{1,2}	
24"	
L	16W (2135lm)
M	32W (3965lm)
36"	
L	24W (3200lm)
M	48W (5945lm)
48"	
L	32W (4265lm)
M	64W (7925lm)
60"	
L	40W (5335lm)
M	80W (9905lm)
72"	
L	48W (6400lm)
M	96W (11890lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3D0E	Lutron Hi-lume Premier 0.1% EcoSystem


Diffuser Bottom	
SW	Satin opal acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard



Size





Step

SURFACE



Direct illumination with indirect glow



Model 1540

Type	
S	Surface
Size	
24	24.0" (610mm)
28	28.0" (711mm)
32	32.0" (813mm)
36	36.0" (914mm)
Custom	
Wattage ^{1,2}	
24"	
L	28W (3735lm)
28"	
L	40W (5335lm)
32"	
L	54W (7200lm)
36"	
L	77W (10265lm)
Color Temp ³	
30	3000
35	3500
40	4000
Voltage	
U	120/277 Volt
Driver	
RD	Remote
ID	Integral

Control - (RD/ID)	
S	Non-dim
D010	0-10V 1%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)
Diffuser Bottom	
SW	Satin opal acrylic
Diffuser Top	
CPS	Clear polycarbonate - sanded both sides
Finish	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color
Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

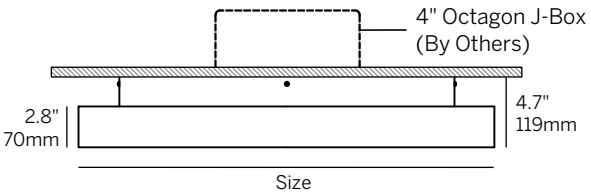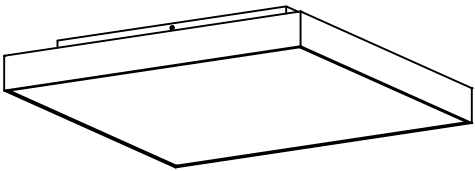



Step RC

SURFACE

Direct illumination with indirect glow



Model 1541

Type	
S	Surface

Size	
24	24.0" (610mm)
28	28.0" (711mm)
32	32.0" (813mm)
36	36.0" (914mm)
48	48.0" (1219mm)
Custom	

Wattage ^{1,2}	
24"	
L	8W (1065lm)
M	16W (1980lm)
28"	
L	10W (1335lm)
M	20W (2475lm)
32"	
L	12W (1600lm)
M	24W (2970lm)
36"	
L	14W (1865lm)
M	28W (3465lm)
48"	
L	20W (2665lm)
M	40W (4955lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt

Driver	
RD	Remote
ID	Integral



Control - (RD/ID)	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser Bottom	
SW	Satin opal acrylic

Diffuser Top	
CPS	Clear polycarbonate - sanded both sides

Finish	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

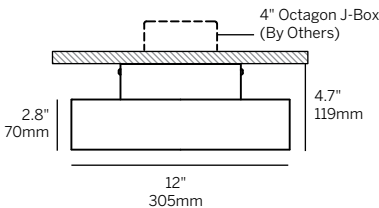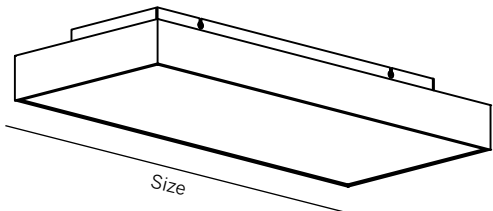



Wing AR

SURFACE

Direct illumination with indirect glow

Model 1821

Type	
S	Surface

Size	
26	26.0" (660mm)
37	37.0" (940mm)
49	49.0" (1245mm)
Custom	

Wattage ^{1,2}	
26"	
L	6W (800lm)
M	12W (1485lm)
37"	
L	9W (1200lm)
M	18W (2230lm)
49"	
L	12W (1600lm)
M	24W (2970lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser ⁴	
SW	Satin opal acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard
4	Reflector is opal acrylic

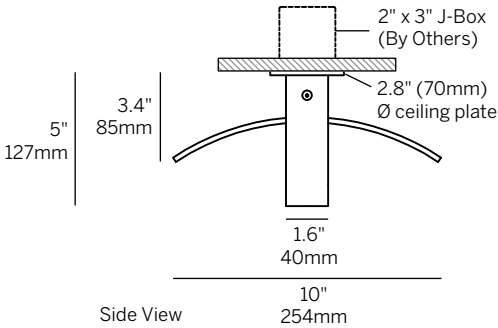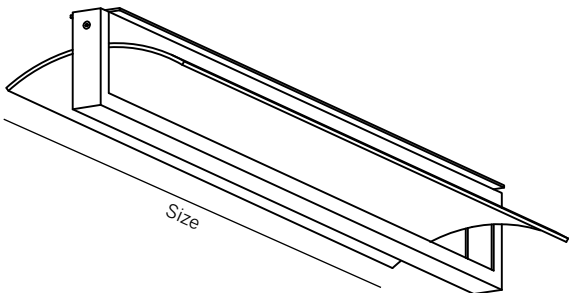



WALL



City Indoor

WALL
Indirect illumination

Model 1825

Type	
W	Wall

Size	
27	27.0" (686mm)
39	39.0" (991mm)
51	51.0" (1295mm)
63	63.0" (1600mm)
Custom	

Wattage ^{1,2}	
27"	
L	5W (665lm)
M	10W (1240lm)
39"	
L	8W (1065lm)
M	16W (1980lm)
51"	
L	11W (1465lm)
M	22W (2725lm)
63"	
L	14W (1865lm)
M	28W (3465lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

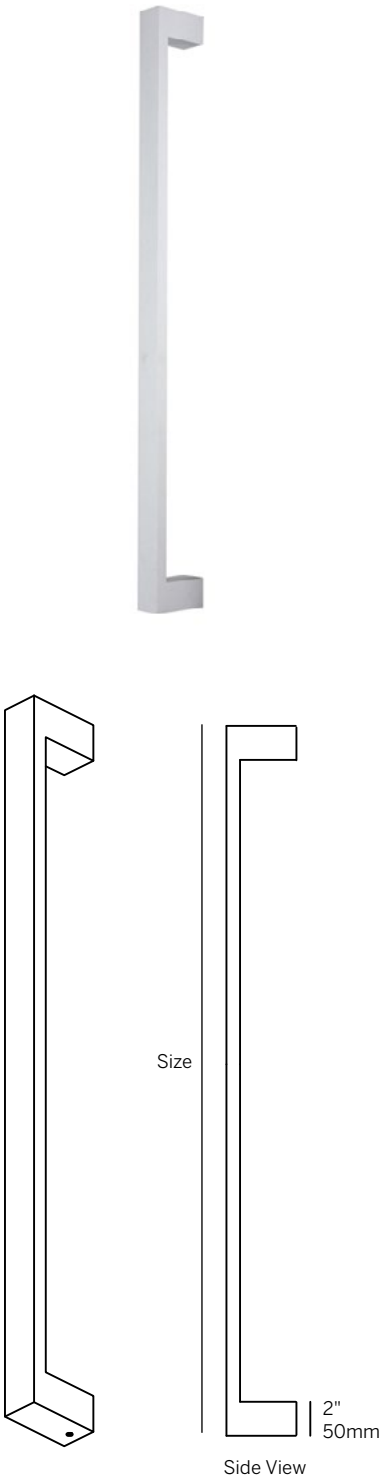



Sigma Indoor

WALL

General illumination


Model 1740

Type	
W	Wall
Size	
27	27.0" (686mm)
39	39.0" (991mm)
51	51.0" (1295mm)
Custom	
Wattage ^{1,2}	
27"	
L	6W (800lm)
M	12W (1485lm)
39"	
L	9W (1200lm)
M	18W (2230lm)
51"	
L	12W (1600lm)
M	24W (2970lm)
Color Temp ³	
30	3000
35	3500
40	4000
Voltage	
U	120/277 Volt
Driver	
RD	Remote
ID	Integral

Control - (RD/ID)	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem (remote only)

Diffuser	
SA	Satin clear acrylic
Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard





Wedge Indoor

WALL
Indirect illumination



Model 2537

Type	
W	Wall

Size	
12	12.2" (311mm)
24	24.1" (612mm)
48	48.0" (1219mm)
72	72.0" (1829mm)
96	96.0" (2,438mm)
Custom	
For customized shapes, please include a layout drawing or advise desired length	

Wattage ^{1,2}	
L	
3	W/ft (400 lm/ft)
10	W/m (1,335 lm/m)
M	
6	W/ft (743 lm/ft)
20	W/m (2,475 lm/m)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

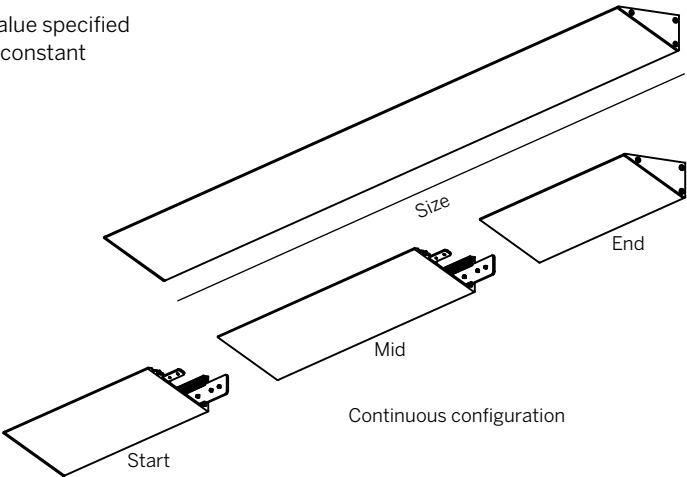



OUTDOOR



City Outdoor

WALL
Indirect illumination

Model 1825WL¹

Type	
W	Wall

Size	
27	27.0" (686mm)
39	39.0" (991mm)
51	51.0" (1295mm)
63	63.0" (1600mm)
Custom	

Wattage ^{2,3}	
27"	
L	8W (765lm)
39"	
L	12W (1,225lm)
51"	
L	17W (1,685lm)
63"	
L	21W (2,140lm)

Color Temp ⁴	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt



Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Suitable for wet location, IP65 rated LED tape
2	Nominal lumens value specified
3	LED tape, constant voltage 24 Volt
4	90+ CRI standard

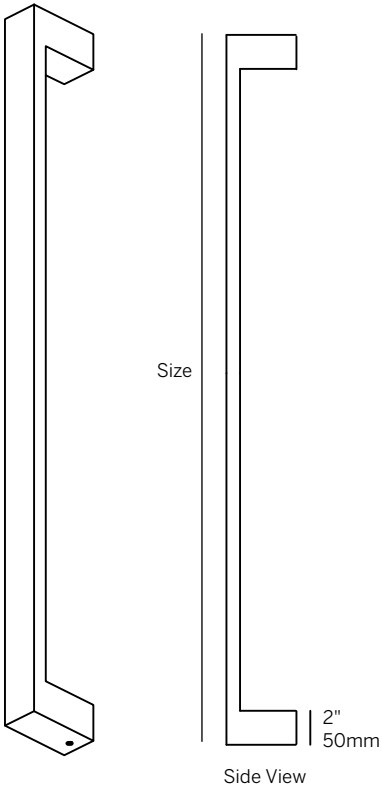



Sigma Outdoor

WALL

General illumination

Model 1740WL¹

Type	
W	Wall

Size	
27	27.0" (686mm)
39	39.0" (991mm)
51	51.0" (1295mm)
Custom	

Wattage ^{2,3}	
27"	
L	9W (920lm)
39"	
L	13W (1375lm)
51"	
L	18W (1835lm)

Color Temp ⁴	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt


Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic

Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Suitable for wet location, IP65 rated LED tape
2	Nominal lumens value specified
3	LED tape, constant voltage 24 Volt
4	90+ CRI standard





Wedge Outdoor

WALL
Indirect illumination



Model 2537WL¹

Type	
W	Wall
Size	
12	12.0" (305mm)
24	24.0" (610mm)
48	48.0" (1219mm)
72	72.0" (1829mm)
96	96.0" (2,438mm)
Custom	
For customized shapes, please include a layout drawing or advise desired length	
Wattage ^{2,3}	
L	4.4 W/ft (465 lm/ft)
	14.4 W/m (1,528 lm/m)
Color Temp ⁴	
30	3000
35	3500
40	4000
Voltage	
U	120/277 Volt
Driver	
RD	Remote
Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser	
SA	Satin clear acrylic
Finish	
19	Painted anodized aluminum - RAL 9006 matte
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

- Notes**
- 1 Suitable for wet location, IP65 rated LED tape
 - 2 Nominal lumens value specified
 - 3 LED tape, constant voltage 24 Volt
 - 4 90+ CRI standard


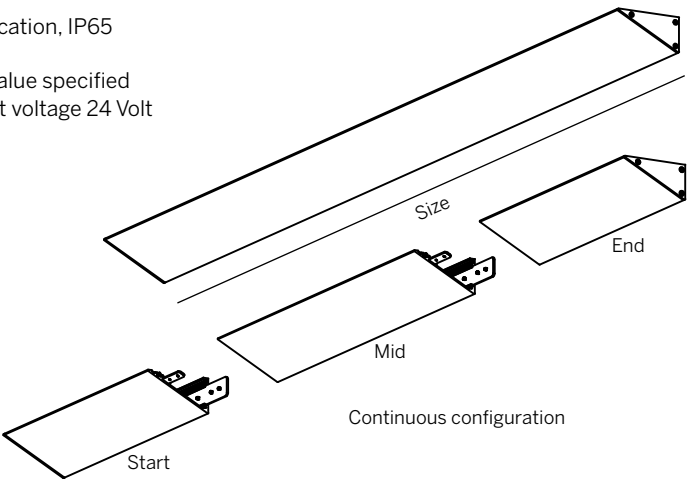


Photo Credits

cover, page 43
project
location
architect
photography
product

Laurel Library
Laurel, MD
Grimm + Parker
Michael K. Wilkinson
Frame 70

page 1/2
project
location
architect
photography
product

Laurel Library
Laurel, MD
Grimm + Parker
Michael K. Wilkinson
Arc 65

page 5
project
location
architect
photography
product

Laurel Library
Laurel, MD
Grimm + Parker
Michael K. Wilkinson
Arc 65 / Fuse

page 8
project
location
architect

lighting design
product

W Hotel
Fort Lauderdale, FL
Adache Associates/
Clodagh
MCLA
Ring

page 9
project
location
architect
lighting design
photography
product

Salisbury University
Salisbury, MD
Sasaki
MCLA
Michael K. Wilkinson
Gran Fuse

page 11
project
location
architect
lighting design
product

Dulles International Airport
Washington, DC
SOM
MCLA
Custom

page 12
project
location
architect
photography
product

St. Coletta School
Washington, DC
Robert AM Stern arch
Bliss Fassman LD
Custom

page 18
project
location
architect
photography
product

Carroll Community College
Carroll Community, MD
Grimm + Parker
Alain Jaramillo
Gran Fuse

page 25
project
location
architect
photography
product

Laurel Library
Laurel, MD
Grimm + Parker
Michael K. Wilkinson
Arc 65

page 27
project

location
architect
photography
product

Northern VA Community
College
Northern, VA
Grimm & Parker
Ken Wyner
Arc 100

page 45
project
location
architect
lighting design
photography
product

Salisbury University
Salisbury, MD
Sasaki
MCLA
Michael K. Wilkinson
Gran Fuse

page 50
project
location
architect
photography
product

Carroll Community College
Carroll Community, MD
Grimm + Parker
Alain Jaramillo
Ring 65

page 52
project
location
architect
photography
product

Elkridge Library
Elkridge, MD
Grimm + Parker
Sam Kittner
Ring 100

page 67/68
project
location
architect
photography
product

Amanda Manufacturing
Logan, Ohio
MPdL Studio
James Haefner Photography
Aura

page 87
project
location
architect
photography
product

AARP
Washington, DC
OPX PLLC
Judy Davis, Architectural
Step

page 99
project

location
architect

lighting design

New York Public Library,
Macombs Bridge Branch
New York, NY
Michielli + Wyetzner
Architects
Anita Jorgensen Lighting
Design

photography
product

Alexander Severin
Custom ALM Wedge

page 101/102, 103
project
location
architect
photography
product

AARP
Washington, DC
OPX PLLC
Judy Davis, Architectural
City

page 107
project
location
architect
lighting design
product

First Residences
Washington, DC
Hickok Cole
CM Kling
Wedge

page 110
project
location
architect

lighting design
photographer
product

Temple Adath Israel
Merion Station, PA
Atkin Olshin Schade
Architects
BEAM, Ltd.
Stephen Hoppe
Custom Hex Assembly &
Candle Sticks

page 111-112
project

location
architect
photography
product

Northern VA Community
College
Northern, VA
Grimm + Parker
Ken Wyner
Gran Fuse





Lighting is about creating an environment that uses light as the main medium of expression. It means having one's work blend seamlessly with the architecture, often at the risk of not being seen. It's about giving definition to a space.