

Aline 70

SURFACE
Direct illumination

Model 1550

Type	
S	Surface

Size	
48	49.1" (1246mm)
60	60.9" (1547mm)
72	72.8" (1848mm)
84	84.6" (2149mm)
Custom	

Wattage ^{1,2}	
48"	
L	12W (1600lm)
M	24W (2970lm)
60"	
L	15W (2000lm)
M	30W (3715lm)
72"	
L	18W (2400lm)
M	36W (4460lm)
84"	
L	21W (2800lm)
M	42W (5200lm)

Color Temp ³	
30	3000
35	3500
40	4000

Voltage	
U	120/277 Volt




Driver	
RD	Remote

Control - RD	
S	Non-dim
D010	0-10V 10%
L3DAE	Lutron Hi-lume 1% EcoSystem
L3DOE	Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom	
SW	Satin opal acrylic

Finish	
16	Clear anodized aluminum
21	Painted white - RAL 9010 matte
26	Painted black - RAL 9005 matte
22	Painted custom color

Notes	
1	Nominal lumens value specified
2	Linear LED board, constant voltage 24 Volt
3	90+ CRI standard

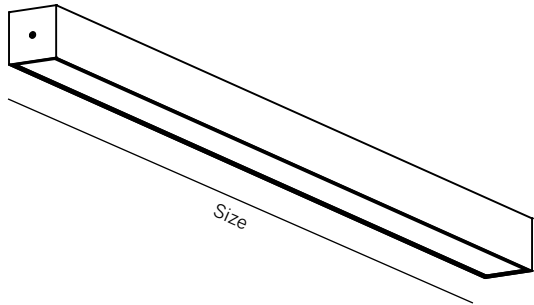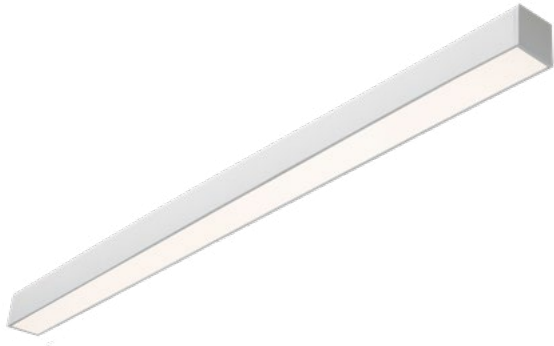

technical
information

