

Arc 65

PENDANT

Direct, indirect or direct-indirect illumination

Model 1694¹

Type

P Pendant

Size

Specify radius

Specify length

For customized shapes, please include a layout drawing or advise desired shape

Wattage^{2,3}

Direct⁴

LD

3 W/ft (400 lm/ft)

10 W/m (1,335 lm/m)

MD

6 W/ft (743 lm/ft)

20 W/m (2,475 lm/m)

Indirect⁵

LI

3 W/ft (400 lm/ft)

10 W/m (1,335 lm/m)

MI

6 W/ft (743 lm/ft)

20 W/m (2,475 lm/m)

XD-No Direct

XI-No Indirect

Color Temp⁶

30 3000

35 3500

40 4000

Voltage

U 120/277 Volt

Driver

RD Remote

Control - RD

S Non-dim

D010 0-10V 10%

L3DAE Lutron Hi-lume 1% EcoSystem

L3DOE Lutron Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

CB Aluminum-painted to match the fixture

Diffuser Top

SA Satin clear acrylic

CT Aluminum-painted to match the fixture

Finish⁷

19 Painted anodized aluminum - RAL 9006 matte

21 Painted white - RAL 9010 matte

26 Painted black - RAL 9005 matte

22 Painted custom color

Mounting

SC Straight cables

Circuit

CS Circuit - Single

CD Circuit - Dual

Power Cable⁸



CC Clear insulated cable (standard)

WC White cable

BC Black cable

Notes

- 1 Separately specify any downlighting elements
- 2 Nominal lumens value specified
- 3 Linear LED board, constant voltage 24 Volt
- 4 For no Direct light specify XD
- 5 For no Indirect light specify XI
- 6 90+ CRI standard
- 7 Canopy finish matches housing
- 8 96" standard cable length

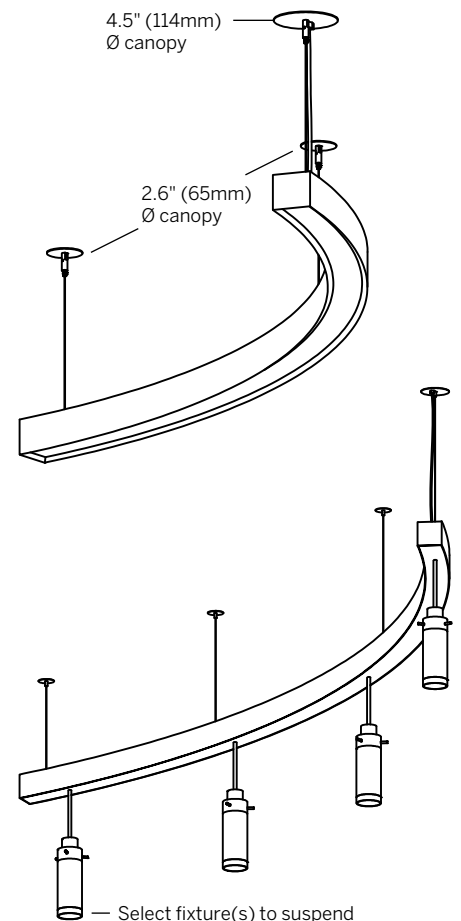

Section