



Frame 50

PENDANT

Direct or Direct-Indirect illumination

Model 1546

Type

P Pendant

Size

26 26.0" [662mm]
38 37.9" [963mm]
50 49.7" [1262mm]
Custom

Wattage^{1,2}

Direct³

26"
LD 9W (1200lm)
MD 18W (2230lm)
38"
LD 12W (1600lm)
MD 24W (2970lm)
50"
LD 15W (2000lm)
MD 30W (3715lm)

Indirect⁴

LI 9W (1200lm)
MI 18W (2230lm)
LI 12W (1600lm)
MI 24W (2970lm)
LI 15W (2000lm)
MI 30W (3715lm)

XD-No Direct

XI-No Indirect

Color Temp⁵

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote
ID Integral (in canopy)

Control - RD

S Non-dim
D010 0-10V 1%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem

Control - ID (in canopy)

S Non-dim
D010 0-10V 1%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SA Satin clear acrylic
CT Aluminum – painted to match the fixture

Finish⁵

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting

SCRD Straight cables - remote driver
SCID Straight cables - driver in canopy
CERD Center canopy - remote driver
CEID Center canopy - driver in canopy

Circuit



CS Circuit - Single
CD Circuit – Dual

Power Cable⁶


CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes


- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 For no Direct light specify XD
- 4 For no Indirect light specify X
- 5 90+ CRI standard
- 6 Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
- 7 96" standard cable length

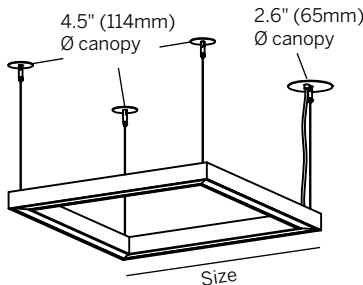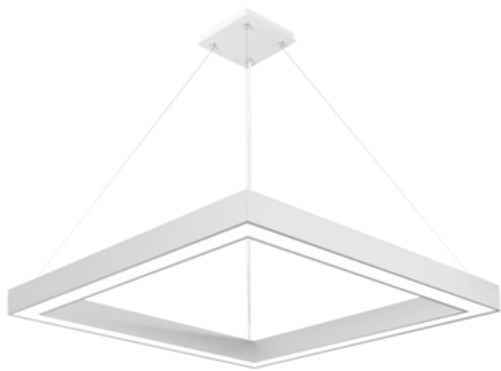


Straight cables with remote driver

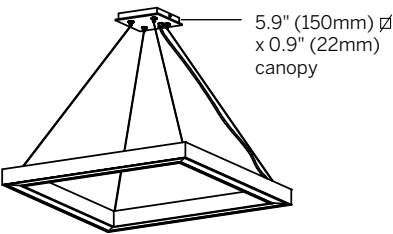

Center canopy with remote driver

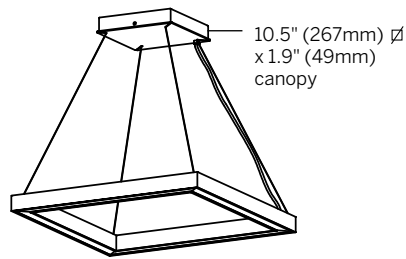

Center canopy with integral driver



Section

technical
information