



Frame 70

PENDANT

Direct illumination

Model 1545

Type

P Pendant

Size

24 24.0" (610mm)
36 36.0" (914mm)
48 48.0" (1219mm)
Custom

Wattage^{1,2}

24" L 20W (2665lm)
M 40W (4955lm)
36"

L 32W (4265lm)
M 64W (7925lm)
48"

L 44W (5865lm)
M 88W (10895lm)

Color Temp³

30 3000
35 3500
40 4000

Voltage

U 120/277 Volt

Driver

RD Remote

Control - RD

S Non-dim
D010 0-10V 1%
L3DAE Lutron Hi-lume 1% EcoSystem
L3DOE Hi-lume Premier 0.1% EcoSystem

Diffuser Bottom

SW Satin opal acrylic

Finish⁴

16 Clear anodized aluminum
21 Painted white - RAL 9010 matte
26 Painted black - RAL 9005 matte
22 Painted custom color

Mounting


SC Straight cables
CE Center canopy

Power Cable⁵


CC Clear insulated cable (standard)
WC White cable
BC Black cable

Notes


- 1 Nominal lumens value specified
- 2 Linear LED board, constant voltage 24 Volt
- 3 90+ CRI standard
- 4 Canopy finish matches housing
For Clear anodized aluminum finish, canopy finish will be painted anodized aluminum
96" standard cable length
- 5

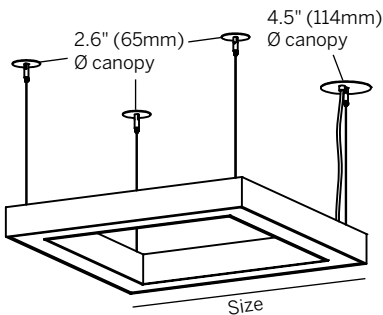


Straight cables with remote driver

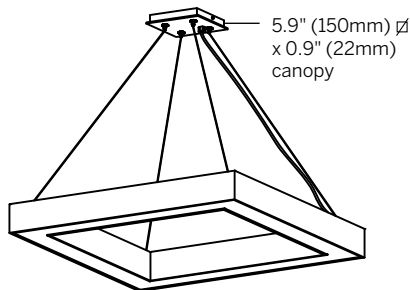

Center canopy with remote driver

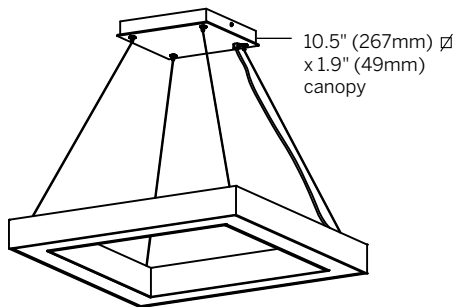

Center canopy with integral driver



Section

technical
information