


Secant 50

inter•lux

PENDANT

Direct, indirect or direct-indirect illumination

2.0"
50mm



2.0"
50mm

Section

Model 1671

Size

24.8" (631mm)

36.3" (921mm)



47.7" (1211mm)

59.1" (1500mm)

70.5" (1790mm)

Custom



STRAIGHT CABLES WITH REMOTE DRIVER

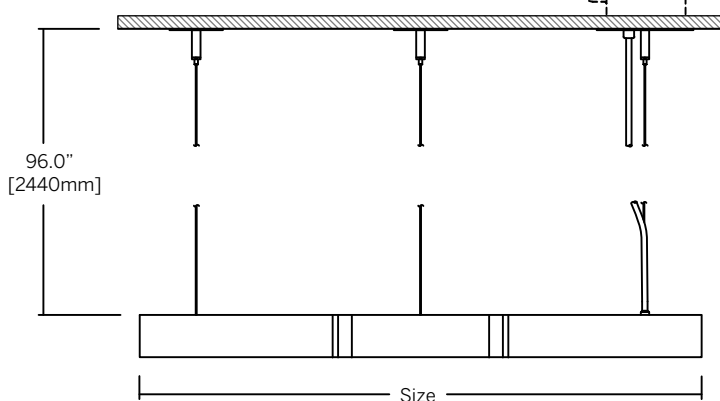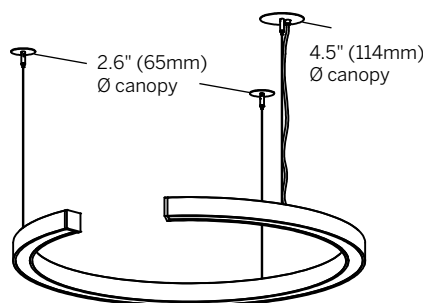

Remote driver(s)
Order separately

4" Octagon Box
(By Others)

CENTER CANOPY WITH REMOTE DRIVER

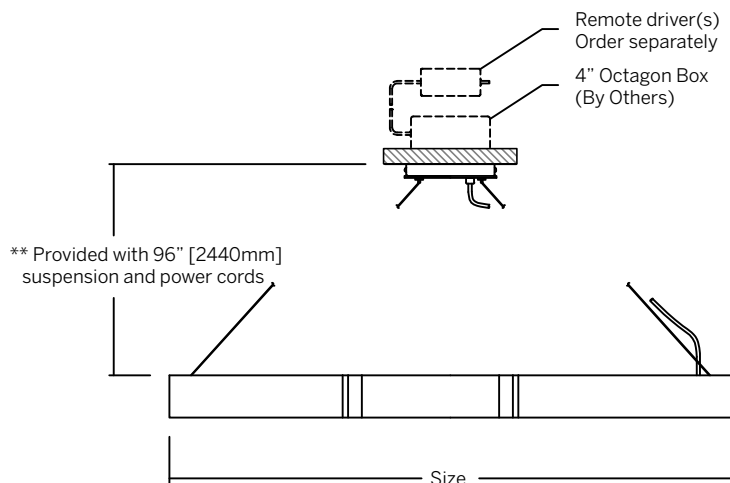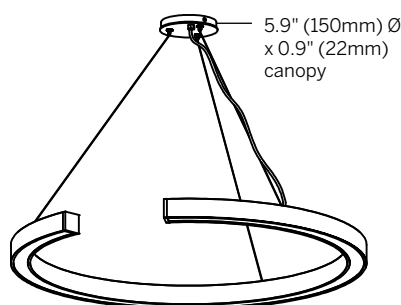

Remote driver(s)
Order separately

4" Octagon Box
(By Others)

** Provided with 96" [2440mm]
suspension and power cords.

Minimum mounting height per fixture size for center canopy options:

Fixture Size (Diameter)	Minimum Mounting Height
24.8" (631mm)	15" (380mm)
36.3" (921mm)	20" (510mm)
47.7" (1211mm)	30" (760mm)
59.1" (1500mm)	40" (1,015mm)
70.5" (1790mm)	50" (1,270mm)



scan or click
for info



410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



inter-lux.com/alm 1



Secant 50

inter•lux

PENDANT

Direct, indirect or direct-indirect illumination

CENTER CANOPY WITH INTEGRAL DRIVER

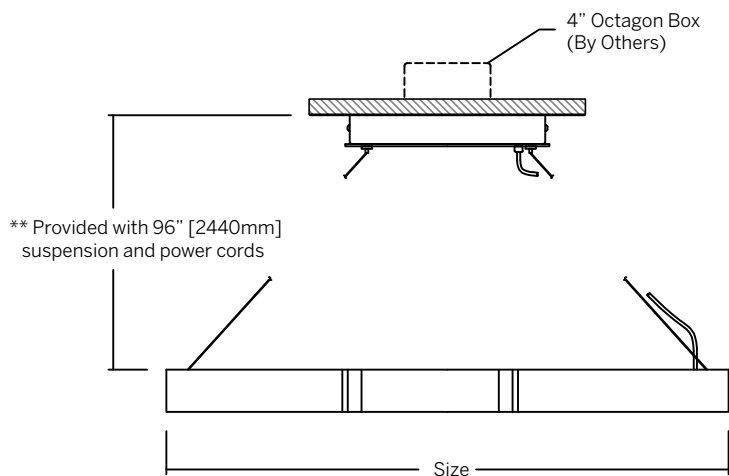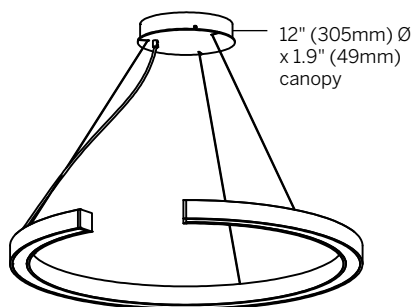

Minimum mounting height per fixture size for center canopy options:

Fixture Size (Diameter)	Minimum Mounting Height
24.8" (631mm)	15" (380mm)
36.3" (921mm)	20" (510mm)
47.7" (1211mm)	30" (760mm)
59.1" (1500mm)	40" (1,015mm)
70.5" (1790mm)	50" (1,270mm)



scan or click
for info



410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



inter-lux.com/alm 2



Secant 50

inter•lux

PENDANT



Direct, indirect or direct-indirect illumination

POWER FEED / SUSPENSION

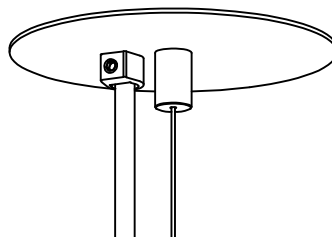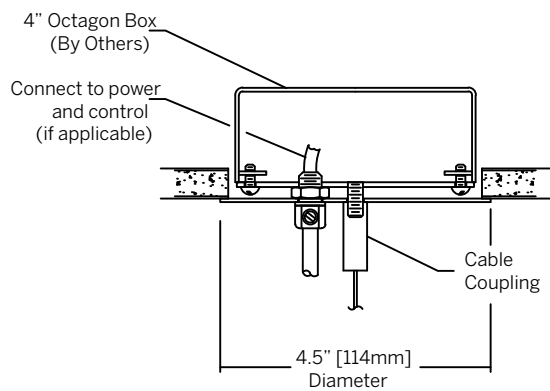



Mounting Option Power
Octagon Box (By Others)
Installed in drywall, wood or concrete ceiling

SUSPENSION - NON POWER (ACCESSIBLE CEILING)

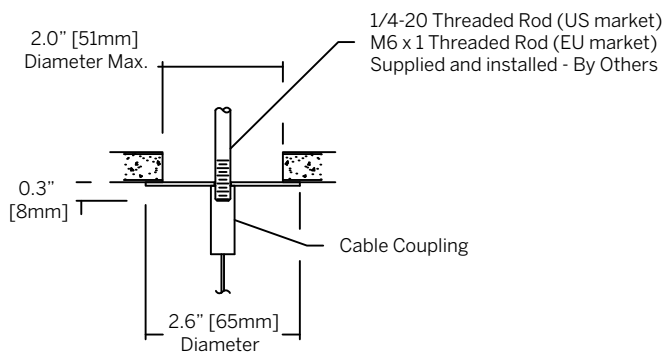

Mounting Option - Non Power
Threaded Rod installed
to structural ceiling (By Others)

SUSPENSION - NON POWER (NON-ACCESSIBLE CEILING)

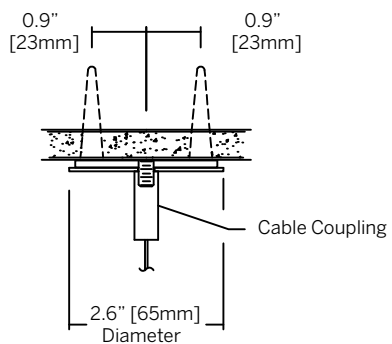

Mounting Option - Non Power
Suspension Assembly
Installed in drywall, wood or concrete ceiling



scan or click
for info

