


1. **GDL Housing** (WG-60RGDL-RBT)
2. **Round Wall Wash - Silver** (WG-60RGDL-RBT ... RWW-S)
3. **Round Wall Wash - White** (WG-60RGDL-RBT ... RWW-W)
4. **Round Regressed Cone - Silver** (WG-60RGDL-RBT ... RRC-S)
5. **Flush Round Opal Diffuser** (WG-60RGDL-RBT ... FROD-W)
6. **Round Regressed Cone - White** (WG-60RGDL-RBT ... RRC-W)
7. **Driver**



2/3 2.4" General Downlight Round Wall Wash

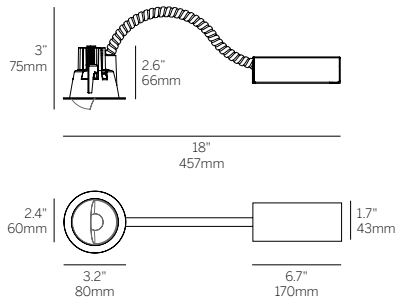

Fixation

- RBT = Recessed bezel trim

Power¹

- L = Low power, 5.9W @ 350mA
- M = Mid power, 8.6W @ 500mA
- H = High power, 12.4W @ 700mA

CRI/CCT^{2,3} 90+ CRI (Low/Medium/High Power)

- 927 = 2700K, (364/495/654 lm)
- 930 = 3000K, (392/533/704 lm)
- 935 = 3500K, (392/533/704 lm)
- 940 = 4000K, (419/571/753 lm)

Driver

- X = Driver ordered separately

Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

Remote

- D010 = EidoLED, 1%, 0-10V dimming, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC only

Lens

- RWW = Round Wall Wash

Finish⁴



- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL

Options

- CP = Chicago Plenum Housing⁵
- IC = Insulated Ceiling Housing⁵
- NC = New Construction Housing⁵
- LP = Landing Pan⁵
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Delivered lumens shown. See photometry page for additional details.
- 4 See Tiger Drylac color chart: inter-lux.com/tiger
- 5 See housings page for details.

4/6 2.4" General Downlight Round Regressed Cone

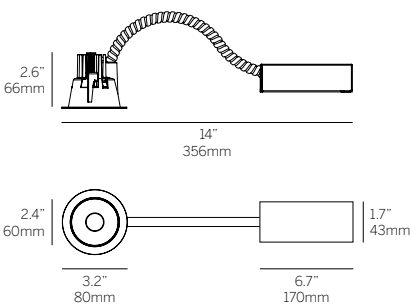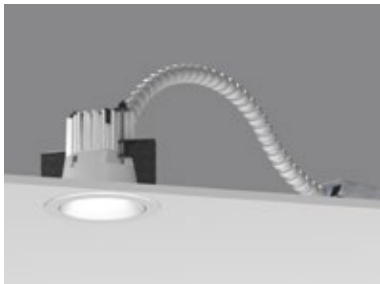

Fixation

- RBT = Recessed bezel trim

Power¹

- L = Low power, 5.9W @ 350mA
- M = Mid power, 8.6W @ 500mA
- H = High power, 12.4W @ 700mA

CRI/CCT^{2,3} 90+ CRI (Low/Medium/High Power)

- 927 = 2700K, (399/543/717 lm)
- 930 = 3000K, (429/584/771 lm)
- 935 = 3500K, (429/584/771 lm)
- 940 = 4000K, (459/625/826 lm)

Driver

- X = Driver ordered separately

Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

Remote

- D010 = EidoLED, 1%, 0-10V dimming, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC only

Lens

- RRC = Round regressed cone

Finish⁴



- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL

Options

- CP = Chicago Plenum Housing⁵
- IC = Insulated Ceiling Housing⁵
- NC = New Construction Housing⁵
- LP = Landing Pan⁵
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Delivered lumens shown. See photometry page for additional details.
- 4 See Tiger Drylac color chart: inter-lux.com/tiger
- 5 See housings page for details.

5 2.4" General Downlight Flush Round Opal Diffuser

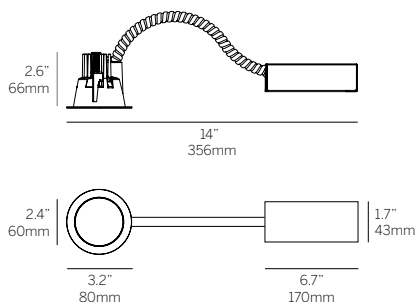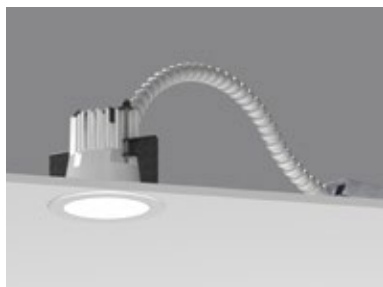

Fixation

- RBT = Recessed bezel trim

Power¹

- L = Low power, 5.9W @ 350mA
- M = Mid power, 8.6W @ 500mA
- H = High power, 12.4W @ 700mA

CRI/CCT^{2,3} 90+ CRI (Low/Medium/High Power)

- 927 = 2700K, (364/495/654 lm/ft)
- 930 = 3000K, (392/533/704 lm/ft)
- 935 = 3500K, (392/533/704 lm/ft)
- 940 = 4000K, (419/571/753 lm/ft)

Driver

- X = Driver ordered separately

Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

Remote

- D010 = EldoLED, 1%, 0-10V dimming, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC only

Lens

- FROD = Flush round opal diffuser

Finish

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL

Options

- CP = Chicago Plenum Housing⁵
- IC = Insulated Ceiling Housing⁵
- NC = New Construction Housing⁵
- LP = Landing Pan⁵
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location

1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.

2 Other lumen packages available, consult factory.

3 Delivered lumens shown. See photometry page for additional details.

4 See Tiger Drylac color chart: inter-lux.com/tiger

5 See housings page for details.