

5.5" ProTools Cylinders - Remote driver information


Please refer to driver manufacturer's website for current data sheets and wiring guidelines.

Driver	Wattage	Control	Dimming	FIXTURES PER DRIVER		
				L (6.3W)	M (9W)	H (12W)
RDALI	30W	DALI-2	1%	1	1	1
RDMX	30W	DMX	Dim To Off	1	1	1

RDALI = eldoLED DALI-2 1% dimming, 120-277V, 30W [spec sheet](#)



Dry Location Enclosure

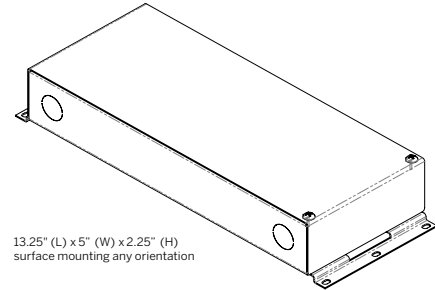


Wire gauge	Maximum wiring distance ¹
AWG 20 (0.52 mm ²)	46 ft (14 m)
AWG 19 (0.65 mm ²)	59 ft (18 m)
AWG 18 (0.82 mm ²)	72 ft (22 m)
AWG 17 (1.04 mm ²)	92 ft (28 m)
AWG 16 (1.31 mm ²)	118 ft (36 m)

¹Actual distance must be calculated by installer. Must comply with NEC code.

RDMX = eldoLED DMX 0.1% dimming, 120-277V, 30W [spec sheet](#)



Dry Location Enclosure

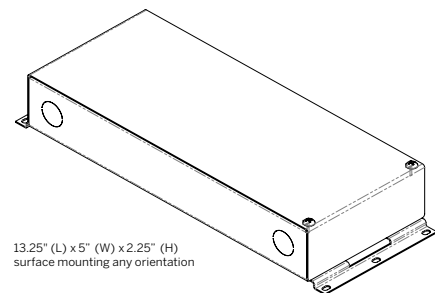

Wire gauge	Maximum wiring distance ¹
AWG 20 (0.52 mm ²)	46 ft (14 m)
AWG 19 (0.65 mm ²)	59 ft (18 m)
AWG 18 (0.82 mm ²)	72 ft (22 m)
AWG 17 (1.04 mm ²)	92 ft (28 m)
AWG 16 (1.31 mm ²)	118 ft (36 m)

¹Actual distance must be calculated by installer. Must comply with NEC code.