


5.5" ProTools Downlight Round Cylinder






5.5" round ceiling mounted cylinder downlight with 2.5" diameter regressed light aperture.

Luminaire	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; surface and suspended EZ clip mounting for secure installation Round open aperture with minimal ceiling interruption and regressed optical chamber Housing / Reflector Finishes: White, Black, Silver and custom
Mounting	SM - Surface Mount SC - Suspended Cable (field adjustable) SR - Suspended Rigid swivel stem 5" dia. for mounting to 4" j-box
Cover	RRC - Round Recessed Cone for low brightness, general illumination
LED	Constant Current, 92+ CRI (standard), 98+ CRI (optional), 2-Step MacAdam High / Extra High / Super High choices (delivers up to 150 lumens per watt) 2700K, 3000K, 3500K, 4000K Warm Dim (1800 - 3000K) L70 (TM21 Projected 85°C) Static White = 66,000 hours Warm Dim = 55,000 hours
Lens	OA - Open Aperture SOL - Solite Lens LSL - Linear Spread Lens HL - Honeycomb Louver
Beam	20°, 25°, 35°, 50°, 60°
Driver	Integral and remote drivers for all dimming and non-dimming applications 0-10V, Phase, Lutron and DALI driver options POE driver compatibility
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, WL Wet Location (IP65) optional

Canopy (5" dia, 4" j-box)



Surface mount (SM)

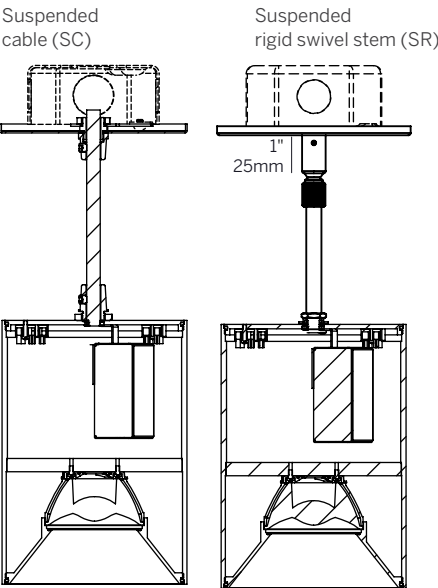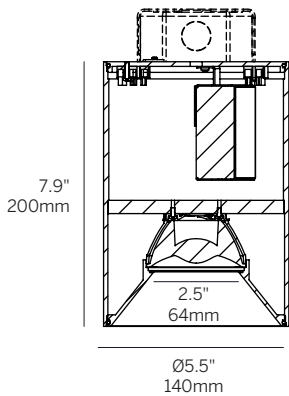

5.5" ProTools Downlight Round Cylinder

Model	Mounting	Canopy	Power <sup>2</sup>	CRI	CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Housing Finish <sup>6</sup>	Reflector Finish	Options
WG-140RPTDL	SM SC1 <sup>1</sup> SC2 <sup>1</sup> SC3 <sup>1</sup> SR1 SR2 SR3 SRX	5 X	H XH SH	92 98	27 30 35 40 WD	S010 D010 SPH PEQ0 D2S RS010 RD010 RD2S X <sup>5</sup>	RRC	OA SOL LSL HL	20 25 35 50 60	W (std) B S F	W (std) B S F	EM WL AWNRF

<b>Model</b> <ul style="list-style-type: none"><li>WG-140RPTDL = 5.5" ProTools Downlight Round Cylinder</li></ul>	<b>Remote Driver<sup>4</sup></b> <ul style="list-style-type: none"><li>RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (50W or 100W)</li><li>RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (50W or 100W)</li><li>RD2S = Remote DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (50W or 100W)</li><li>X = No Driver<sup>5</sup></li></ul>
<b>Mounting</b> <ul style="list-style-type: none"><li>SM = Surface Mounted</li><li>SC1 = Suspended cable 39.4" (1m)<sup>1</sup></li><li>SC2 = Suspended cable 78.7" (2m)<sup>1</sup></li><li>SC3 = Suspended cable 118.1" (3m)<sup>1</sup></li><li>SR1 = Suspended rigid swivel stem 39.4" (1m)</li><li>SR2 = Suspended rigid swivel stem 78.7" (2m)</li><li>SR3 = Suspended rigid swivel stem 118.1" (3m)</li><li>SRX = Suspended rigid swivel stem (specify to nearest 0.25", 118.1" max.)</li></ul>	<b>Cover</b> <ul style="list-style-type: none"><li>RRC = Round Recessed Cone</li></ul>
<b>Canopy</b> <ul style="list-style-type: none"><li>5 = 5" dia. for 4" j-box</li><li>X = No Canopy (surface mount only)</li></ul>	<b>Lens (one accessory per fixture)</b> <ul style="list-style-type: none"><li>OA = Open Aperture</li><li>SOL = Solite Lens</li><li>LSL = Linear Spread Lens</li><li>HL = Honeycomb Louver</li></ul>
<b>Power<sup>2</sup></b> <ul style="list-style-type: none"><li>H = High Power, 12W @ 350mA (n/a for WD)</li><li>XH = Extra High, 19W @ 550mA</li><li>SH = Super High, 26W @ 700 mA</li></ul>	<b>Beam</b> <ul style="list-style-type: none"><li>20 = 20° Beam Angle</li><li>25 = 25° Beam Angle</li><li>35 = 35° Beam Angle</li><li>50 = 50° Beam Angle (55° for WD)</li><li>60 = 60° Beam Angle (n/a for WD)</li></ul>
<b>CRI</b> <ul style="list-style-type: none"><li>92 = 92 CRI</li><li>98 = 98 CRI (n/a for WD)</li></ul>	<b>Housing Finish<sup>6</sup></b> <ul style="list-style-type: none"><li>W = White, RAL 9003 (standard)</li><li>B = Black, RAL 9017</li><li>S = Silver, RAL 9006</li><li>F = Custom finish, specify RAL code</li></ul>
<b>CCT<sup>3</sup></b> <ul style="list-style-type: none"><li>27 = 2700K</li><li>30 = 3000K</li><li>35 = 3500K</li><li>40 = 4000K</li><li>WD = Warm Dimming 1800 - 3000K</li></ul>	<b>Reflector Finish</b> <ul style="list-style-type: none"><li>W = White, RAL 9003 (standard)</li><li>B = Black, RAL 9017</li><li>S = Silver, RAL 9006</li><li>F = Custom finish, specify RAL code</li></ul>
<b>Integral Driver<sup>4</sup></b> <ul style="list-style-type: none"><li>S010 = Standard 0-10V 1% dimming, 120-277V (30W)</li><li>D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W) [n/a for Super High power]</li><li>SPH = Standard Phase 1% dimming, 120V only (30W)</li><li>PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W) [High power only]</li><li>D2S = DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W) [n/a for Super High power]</li></ul>	<b>Options</b> <ul style="list-style-type: none"><li>EM = Emergency LED battery backup (remote only)</li><li>WL = Wet location (IP65)</li><li>AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)</li></ul>

Powered by I B L Whitegoods reserves the right to change any information without prior notice.

- Notes**
- Suspended cable field adjustable.
  - Wattage shown does not include power supplies/drivers.
  - See photometric data sheet for delivered lumens.
  - See driver information for details.
  - Refer to driver information page for driver options that can power multiple fixtures. Ordered separately.
  - Fixture, stem and canopy finish match.