





## Ordering Information

WG-CLWL	SW					OD		
Model	Fixation	Length	Power <sup>1</sup>	CRI/CCT <sup>2</sup>	Driver <sup>3</sup>	Lens	Finish	Options
WG-CLWL	SW	24 36 48 60 XX	XL L M	927 930 935 940	X S D010 DPH L3DAE L3D0E EL96	OD	W B S BR F	MP EM

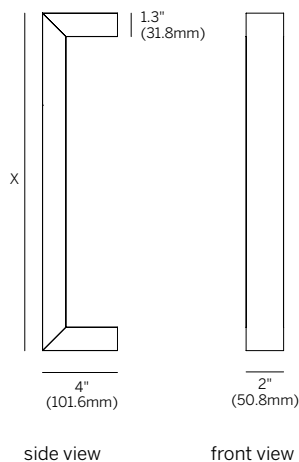

Direct mount or optional mounting (MP) to horizontal J-box (by others)



## Luminaire

- Surface wall or ceiling mounted fixture with indirect lighting for Outdoor use.
- Extruded aluminum housing, easily installed internal LED tray assembly. Remote driver. Field replaceable LED boards.
- Satin opal diffuser for high efficiency and soft edge beam without striations. Efficacy up to 76 lumens per watt (delivered).
- Powdercoat painted.
- 90+ CRI, 3 Step MacAdam.
- L70 (TM21 Projected 85C) Static White 50,000 hours.
- ETL and ETL-C for dry, damp or wet locations.

## Fixation

- SW = Surface wall or ceiling

## Length

- 24 = 24.0" (609.6mm)
- 36 = 36.0" (914.4mm)
- 48 = 48.0" (1219.2mm)
- 60 = 60.0" (1524mm)
- XX = Specify inches to the nearest 0.25 (i.e. 72.25") (max length 96")

## Power<sup>1</sup>

- XL = 1.5 W/ft extra low power (24V)
- L = 3.0 W/ft low power (24V)
- M = 6.5 W/ft mid power (24V)

## CRI/CCT (90+ CRI)<sup>2</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

## Driver (remote)<sup>3</sup>

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming

## Lens

- OD = Satin opal diffuser (standard)

## Finish

- W = White, 15% gloss, RAL 9003
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- BR = Bronze, 15% gloss, RAL8019
- F = Custom finish, specify RAL code

## Options

- MP = Mounting plate for horizontal J-box
- EM = Emergency LED driver (remote)

<sup>1</sup> Wattage shown does not include power supplies/drivers.

<sup>2</sup> See photometric data sheet for delivered lumens.

<sup>3</sup> See power supply page for details.