
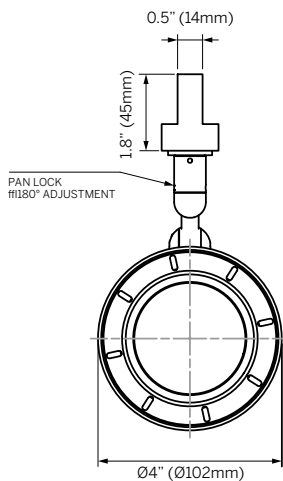


# ZTA.100 Mains Track

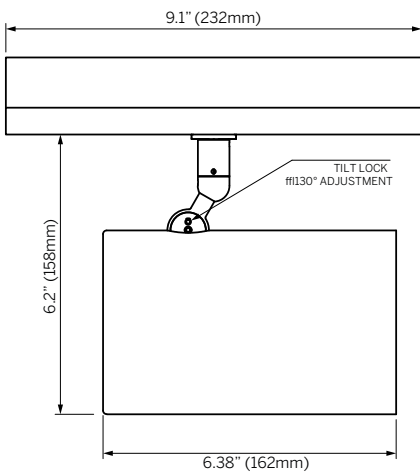

### Luminaire

- Interior rated track spot light with zoomable lens or fixed focus.
- Track mounted (Stucchi Onetrack UL 120V 3 Circuits Common Neutral).
- Precision machined from 70 - 90% recycled aluminum.
- 95+ CRI with multiple CCTs and optics available.
- Fixture includes 0-10V dimming, driver remote.

### Mounting<sup>1</sup>

- TR = Stucchi Onetrack UL 120V 3 Circuits Common Neutral

### Power<sup>2</sup>

- 36 = 36W (3850lm initial at 1050mA, 37V)

### CCT (95+ CRI)<sup>3</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

### Optic

- N = Narrow (22°)
- M = Medium (25°)
- F1 = Flood 1 (32°)
- F2 = Flood 2 (46°)
- WF = Wide Flood (61°)
- WW = Wall Wash (77° x 36°)

### Finish (fixture and track adapter)

- W = Pure White, RAL9010
- BL = Matte Black, RAL9005
- CF = Custom finish, specify RAL

### Accessories<sup>4</sup>

- CL = Clear Lens
- DL = Diffused Lens
- HCL = Honeycomb Louver
- SOL = Solite Lens
- SHS = Sharp Spread Lens
- SOS = Soft Spread Lens

### Controls (Dimming)<sup>5</sup>

- 010 = 0-10V
- DL = DALI
- W = Wireless (Casambi or Xicato)
- MD = Manual on-board dim
- PC = Phase cut

1. Order track separately. See Stucchi Onetrack data sheet for details.
2. Wattage shown is for LED only, system wattage varies depending on driver selected.
3. See photometric data sheet for delivered lumens.
4. Holds one option or accessory. See options on page 4 and accessories on page 5 for details.
5. See driver information for details. Additional drivers available. contact factory.

### Ordering Information

Model	Mounting <sup>1</sup>	Power <sup>2</sup>	CRI/ CCT <sup>3</sup>	Optic	Finish	Accessories <sup>4</sup>	+	Controls <sup>5</sup>
MS-ZTA100MT	TR	36						
MS-TA100MT	TR	36	927 930 935 940	N M F1 F2 WF WW	W BL CF	CL DL HCL SOL SHS SOS		010 DL W MD PC

