



## Ordering Information


WG-WC	SM						MPL		
Model	Fixation	Pattern	Length	Power <sup>3</sup>	CRI/CCT <sup>4</sup>	Driver <sup>5</sup>	Lens	Finish	Options
WG-WC	SM	S <sup>1</sup> PC <sup>2</sup> PR <sup>2</sup>	A A x B A x B x C A x B x A x B	L M	927 930 935 940	X S D010 DPH L3DAE L3D0E EL96	MPL	W (std) B S F	EM




Wall Mounted Uplight



Wall Mounted Down Light



Ceiling Mounted Wall Wash

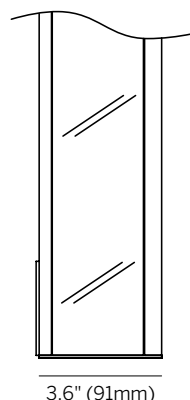

## Luminaire

- Continuous surface wall, ceiling or mullion mounted cove system that delivers an even wash of directed light to the ceiling above, and redirected light to softly illuminate the wall behind the fixture.
- WedgeCove can be mounted as a Wall Mounted Uplight, Wall Mounted Down Light or Ceiling Mounted Wall Wash.
- Light source positioned for optimum vertical spread of illumination.
- Extruded aluminum housing (powdercoat painted), easily installed internal LED tray assembly. Remote driver. Field replaceable LED boards.
- Satin clear diffuser for high efficiency and soft edge beam without striations. Efficacy up to 99 lumens per watt (delivered).
- 90+ CRI, 3 Step MacAdam.
- L70 (TM21 Projected 85C) Static White 60,000 hours.
- ETL and ETL-C for dry and damp locations.

## Fixation

- SM = Surface Mount to wall, ceiling or mullion

## Pattern

- S = Straight run<sup>1</sup>
- PC = Standard patterns coffer 2, 3 or 4 sided with 90° inside corners<sup>2</sup>
- PR = Standard patterns raft 2, 3 or 4 sided with 90° outside corners<sup>2</sup>

## Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25") For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)

## Power<sup>3</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft mid power (24V)

## CRI/CCT (90+ CRI)<sup>4</sup>

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

## Driver (remote)<sup>5</sup>

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- DPH = Phase Dimming, 1% dimming, 120V only
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming

## Lens

- MPL = Micro-prismatic lens (standard)



## Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

## Options

- EM = Emergency LED driver (remote)




- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- See pattern specs sheet.
- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See power supply page for details.



Mounts to 4" J-box (by others)




PATTERN COFFER (PC)

WG-WC-SM-PC-...



PATTERN RAFT (PR)

WG-WC-SM-PR-...

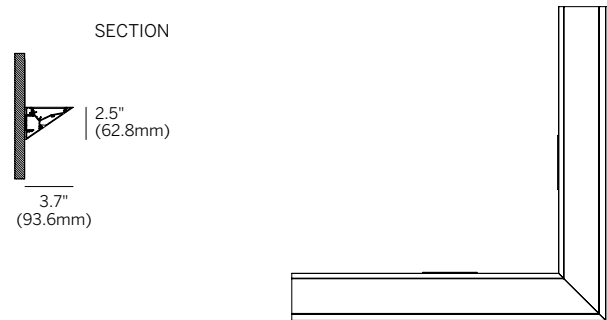


WG-WC-...-MPL-W  
DELIVERED LUMENS PER FOOT


POWER			
		L [3 W/ft]	M [6 W/ft]
CCT	927	308	621
	930	326	657
	935	331	666
	940	340	684

Power Multiplier		
		M [6 W/ft]
		1.00

CCT Multiplier			
927	930	935	940
0.93	0.99	1.00	1.03



ISOILLUMINANCE - 48" MPL M 3500K  
WG-WC-...-S-48-M-935-...-MPL-W'

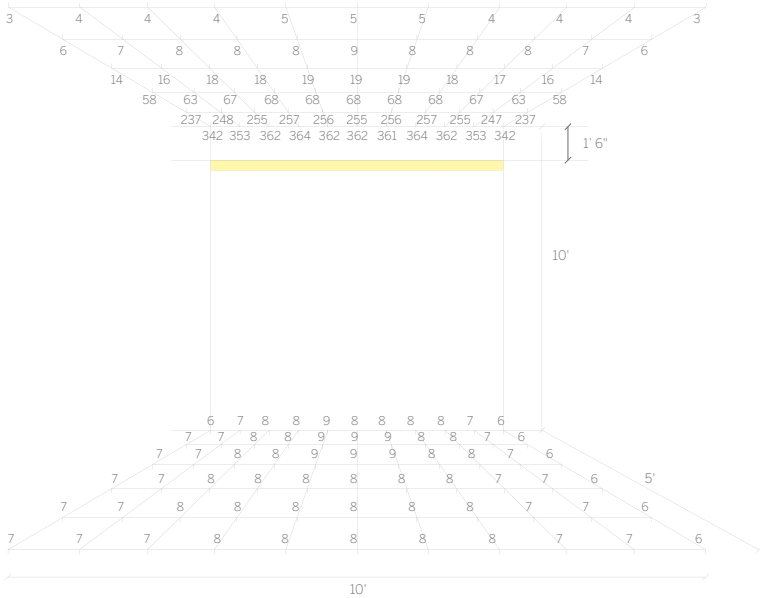

\*Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.