


60 Linear Perimeter Recessed Flush Lens



WG-60LDLP-...-OD-W					
Delivered Lumens Per Foot					
		Power			
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
CCT	927	361	678	1042	1534
	930	376	705	1085	1598
	935	389	731	1124	1673
	940	399	750	1154	1718
	TW ¹	-	337	518	-
Power Multiplier					
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
		0.23	0.44	0.67	1.00
CCT Multiplier					
		927	930	935	940
		0.96	1.00	1.05	1.08

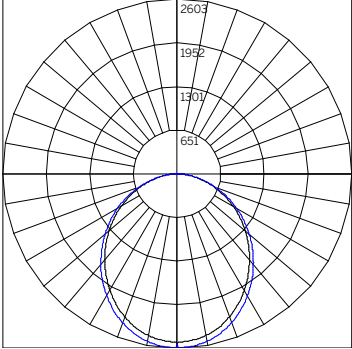

BEAM ANGLE (0-180) = 104.4
 BEAM ANGLE (90-270) = 103.2

ILLUMINANCE - 48" OD P4 3000K		
WG-60LDL-...-S-48-930-P4-...-OD-W ²		
Mounting Height [ft]	Illuminance [fc at max cd]	Beam Width [ft]
2	651	5.2
4	163	10.3
6	72	15.5
8	41	20.6
10	26	25.8
12	18	30.9
14	13	36.1
16	10	41.2
18	8	46.4
20	7	51.6

1 TW Tuneable White lumen data at maximum output / 4000K CCT.
 2 Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.

