

60 Linear Perimeter Recessed Flush Lens



inter•lux



Ordering Information

WG-60LDLP							OD		
Model	Fixation	Pattern	Length	Power ²	CRI/CCT ³	Driver ⁵	Lens	Finish	Options
WG-60LDLP	RPT RBT RGT9 RGT15	S P ¹ PI ¹ PO ¹ PZ ¹	A A x B A x B x C A x B x A x B	P1 P2 P3 P4	927 930 935 940 TW ⁴	E1 L1 BT DALI	OD (std)	W (std) B S F	EM NYC

Luminaire

- Multiple fixation options for recessed ceiling applications.
- Continuous, evenly illuminated snap-in opal diffuser for even illumination standard.
- Easily installed internal LED tray assembly with integral driver. Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.
- Lengths and angles factory cut to exact field dimensions. Standard and custom corners.
- Powdercoat painted.

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed bezel trim
- RGT9 = Recessed grid trim 9/16"
- RGT15 = Recessed grid trim 15/16"

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25"). For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B).

Power²

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

CRI/CCT (90+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K⁴

Driver (Integral)⁵

- E1 = EdoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EdoLED Dali DT8 0.1% (120-277V)

Lens

- OD = Satin opal diffuser (standard diffuse)

Finish

- W = White, 15% gloss, RAL 9010 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

Options

- EM = Emergency LED driver (remote only)
- NYC = 6' whip per run


1 See pattern spec sheet.

2 Wattage shown does not include power supplies/drivers.


3 See photometric data sheet for delivered lumens.

4 TW only available with P2 and P3.

5 See power supply page for details.

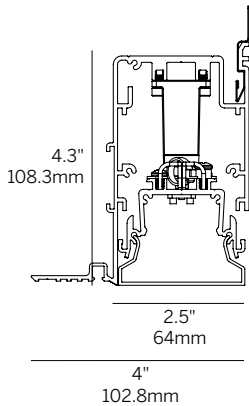

RPT

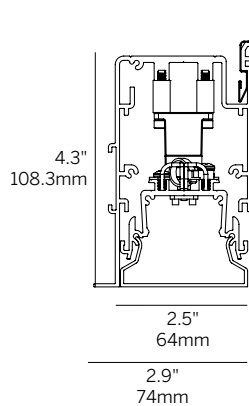

RBT / RGT

Cutout Dimensions

RPT – 2.65" width / length + 1/4"

RBT – 2.5" width / length + 1/4"

whitegoods

410 381 1497 inter-lux.com answers@inter-lux.com
Inter-lux reserves the right to make technical changes without notice.



Updated 5.2025 1