




Contents	
1	overview
2	specifications / configurator
3	photometry




Designed for Armstrong® AXIOM® indirect light coves.


- Designed for Armstrong® AXIOM® indirect light coves.
- Easy Installation, Minimal Electrical Circuits. Simply drops into cove.
- Continuous surface wall mounted cove system that delivers an even wash of directed light to the ceiling above, and redirected light to softly illuminate the wall behind the fixture.
- Light source positioned for optimum vertical spread of illumination.
- Efficacy up to 169 lumens per watt (delivered) @ 3000K, see photometry page for details.
- 90+ CRI, 3 Step MacAdam.
- L70 (TM21 Projected 85°C) Static White / Tunable White 50,000 hours.
- ETL and ETL-C for dry and damp locations.
- Satin clear diffuser for high efficiency and soft edge beam without striations.
- Lengths and angles factory cut to exact field dimensions. Standard and custom corners.
- Powdercoat painted.



Snap On Satin Diffuser (SSD)



Satin Clear Dust Cover (SDC)

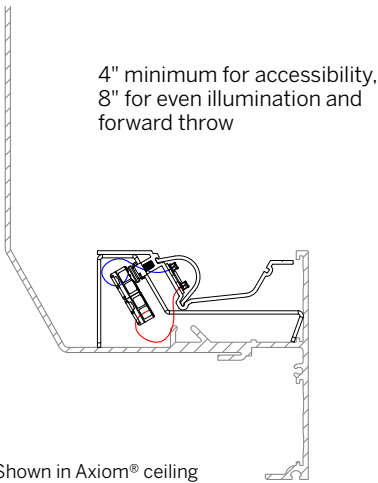

Shown in Axiom® ceiling

Ordering Information									
WG-MC	CM	S							
Model	Fixation	Pattern	Length	Power ¹	CRI/CCT ²	Driver ³	Lens	Finish	Options
WG-MC	CM	S	A	P0 P1 P2 P3 P4	927 930 935 940 TW1840 TW2765	E1 L1 D2DT6 D2DT8	SSD (std) SDC	W (std) F	AWNRF BT EM

Model

- WG-MC = Mini Cove

Fixation

- CM = Cove Mount

Pattern

- S = Straight run

Length

- A = specify inches to the nearest 0.25" (i.e. 72.25")

Power¹

- P0 = 1.5 W/ft
- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft

CRI / CCT (90+ CRI minimum)²

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K

Driver (remote)³

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, EcoSystem (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8), 0.1% dimming (120-277V) [TW only]

Lens

- SSD = Snap On Satin Diffuser (standard)
- SDC = Satin Clear Dust Cover

Finish

- W = White, 15% gloss, RAL 9010 (standard)
- F = Custom finish, specify RAL

Options

- AAWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6, or D2DT8)
- BT = Wireless CAS – Casambi (specify with E1, D2DT6, or D2DT8)
- EM = Emergency LED driver (remote)

1 Wattage shown does not include power supplies/drivers.


2 See photometric data sheet for delivered lumens.

3 See power supply page for details.

WG-MC-...-SSD-W

Delivered Lumens Per Foot

	Power							
	P0	P1	P2	P3	P4	L	M	H
	[1.5 W/ft]	[3 W/ft]	[6 W/ft]	[10 W/ft]	[15 W/ft]	[2.7 W/ft]	[5.5 W/ft] ²	[8.0 W/ft]
cct								
927	243	470	884	1358	2001	-	-	-
930	254	490	920	1415	2084	-	-	-
935	263	507	953	1466	2182	-	-	-
940	265	520	978	1505	2241	-	-	-
TW ¹	141	255	457	694	-	-	-	-
WD ¹	-	-	-	-	-	204	424	613
RGBW ²	-	-	-	-	-	-	346	-



Beam Angle (0-180) = 53.4
Beam Angle (90-270) = 115.9


- 1 TW lumen data at maximum output (4000K).
WD lumen data at maximum output (3000K).
- 2 RGBW lumen data at maximum output with 3000K White LED.
M-RGBW power level wattage is 7.6W/ft.

	Power Multiplier							
	P0	P1	P2	P3	P4	L	M	H
	[1.5 W/ft]	[3 W/ft]	[6 W/ft]	[10 W/ft]	[15 W/ft]	[2.7 W/ft]	[5.5 W/ft] ²	[8.0 W/ft]
9XX	0.12	0.23	0.44	0.67	1.00	-	-	-
TW	0.06	0.12	0.21	0.32	-	-	-	-
WD	-	-	-	-	-	0.09	0.19	0.28
RGBW	-	-	-	-	-	-	0.16	-

CCT Multiplier			
927	930	935	940
0.92	0.95	1.00	1.03

WG-MC-...-S-...-P2-935-SSD-W

10'-0" ceiling height

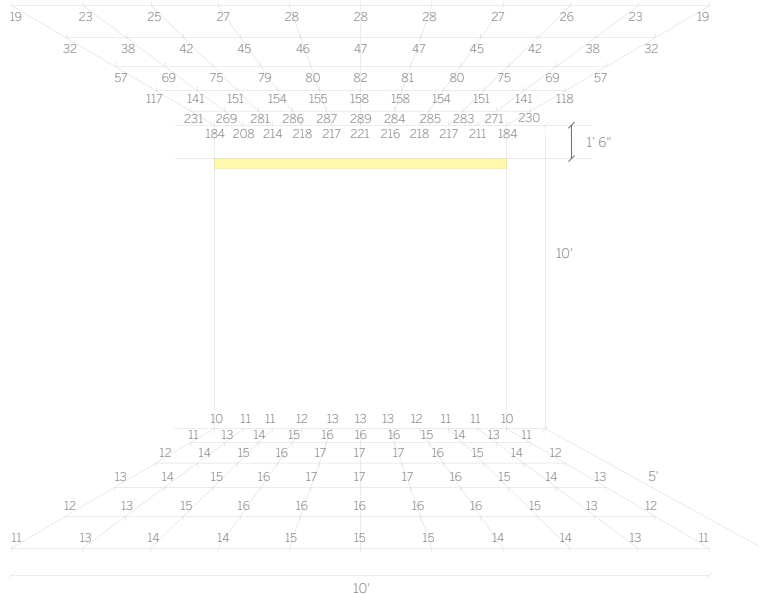

Surface reflectances:

80% Ceiling
50% Wall
20% Floor

Illuminance points are spaced 1'-0" on center.
Illuminance values are shown in units of foot-candles.

WG-MC-...-S-...-P4-935-SSD-W

20'-0" ceiling height

