


Mini Edgeless Cove Soft Shapes




The original continuous linear knife edge cove system featuring plaster-in precision knife edge for clean, minimal effect. Visual curve created by small, segmented sections that can be combined in standard available patterns or customized for specific applications.


Housing	Precision extruded aluminum for true dimensions and tolerances Alignment hardware for invisible seam from below Housing provided in any exact length Unitized gear tray with LEDs for easy final installation Standard and tailored lengths Corners: standard and non-standard Finishes: RAL 9010 white 15% gloss
Integration	Seamless, architectural integration into gypsum for minimal visual detail and true knife edge
Distribution	Low angle forward throw reflector with max beam at 130 degrees Back light reflector delivers soft, even illumination to the cove
LED	Static White, 2700K - 4000K, 1.5 W - 15W/ft, constant current, >90 CRI, 3-Step MacAdam Tunable White, 1800K - 4000K / 2700K - 6500K, 1.5 W - 15W/ft, constant current, >90 CRI L70 (TM21 Projected 85°C) Static White / Tunable White = 50,000 hours
Lens	SSD - snap-on satin diffuser for high efficiency and soft edge beam without striations SDC - satin clear dust cover for wipe down applications
Driver	Remote driver Compatible with quality constant current drivers
Connectivity	Lutron Athena Wireless Node RF Casambi BlueTooth
Weight	2lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE
Voltages	Low Voltage Fixture, 120-277VAC Driver (remote)

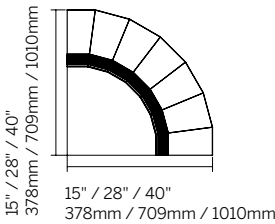


90° Corner Coffered (Inside)
CC90 / 15 - 28 - 40

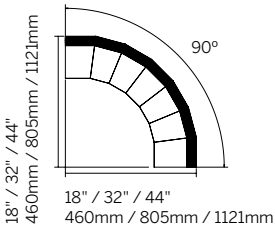

90° Corner Rafted (Outside)
CR90 / 18 - 32 - 44

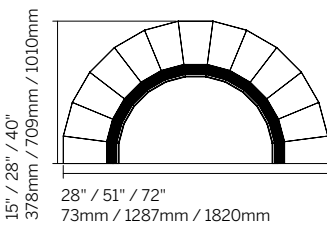

180° Corner Coffered (Inside)
CC180 / 1528 - 2851 - 4072

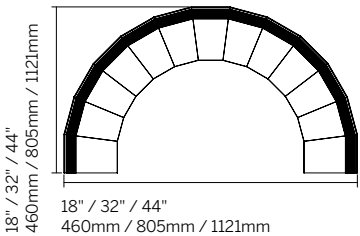

180° Corner Rafted (Outside)
CR180 / 1832 - 3256 - 4478

Specify straight runs to the nearest 0.25" (i.e. 72.25")

Mini Edgeless Cove Soft Shapes

Model	Fixation	Pattern	Size	Length	Power ³	CRI/ CCT ⁴	Driver ⁵	Lens	Finish	Options
WG-MEC	RPT	CC90	15 28 40	A	P0 P1 P2 P3 P4	927 930 935 940 TW1840 TW2765	E1 L1 D2DT6 D2DT8	SSD (std) SDC	W (std) F	AWNRF BT EM
		CR90	18 32 44							
		CC180	1528 2851 4072							
		CR180	1832 3256 4478							

Model
■ WG-MEC = Mini Edgeless Cove

Fixation
■ RPT = Recessed plaster trim

Pattern¹
■ CC90 = Corner Coffered 90° (Inside Corner)
■ CR90 = Corner Rafted 90° (Outside Corner)
■ CC180 = Corner Coffered 180° (Inside Corner)
■ CR180 = Corner Rafted 180° (Outside Corner)

Size¹
■ 15 = 15" x 15" (Inside Corner)
■ 28 = 28" x 28" (Inside Corner)
■ 40 = 40" x 39.8" (Inside Corner)
■ 18 = 18" x 18" (Outside Corner)
■ 32 = 32" x 32" (Outside Corner)
■ 44 = 44" x 44" (Outside Corner)
■ 1528 = 15" x 28" (Inside Corner)
■ 2851 = 28" x 51" (Inside Corner)
■ 4072 = 39.8" x 72" (Inside Corner)
■ 1832 = 18" x 32" (Outside Corner)
■ 3256 = 32" x 56" (Outside Corner)
■ 4478 = 44" x 78" (Outside Corner)

Length
■ A x B x A x B = specify inches to the nearest 0.25" (i.e. 72.25" x 48" x 72.25" x 48")

Power²
■ P0 = 1.5 W/ft
■ P1 = 3 W/ft
■ P2 = 6 W/ft
■ P3 = 10 W/ft
■ P4 = 15 W/ft



CRI / CCT (90+ CRI minimum)³
■ 927 = 2700K
■ 930 = 3000K
■ 935 = 3500K
■ 940 = 4000K
■ TW1840 = Tunable white 1800K - 4000K
■ TW2765 = Tunable white 2700K - 6500K

Driver (remote)⁴
■ E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
■ L1 = Lutron 1% dimming, EcoSystem (120-277V)
■ D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)
■ D2DT8 = DALI-2 (DT8), 0.1% dimming (120-277V) [TW only]

Lens
■ SSD = Snap On Satin Diffuser (standard)
■ SDC = Satin Clear Dust Cover

Finish
■ W = White, 15% gloss, RAL 9010 (standard)
■ F = Custom finish, specify RAL

Options
■ AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6 or D2DT8)
■ BT = Wireless CAS – Casambi (specify with E1, D2DT6 or D2DT8)
■ EM = Emergency LED driver (remote)

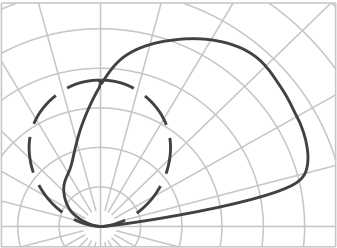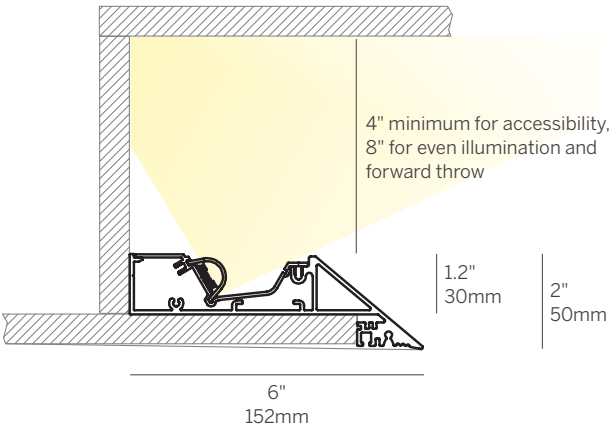


Polar Plot

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 See specsheet for details. Dimensions rounded to the nearest inch.
 - 2 Wattage shown does not include power supplies/drivers.
 - 3 Refer to specsheet for delivered lumen data for all product configurations.
 - 4 See power supply page for details.

Mini Edgeless Cove Soft Shapes

Mix Straight Runs with 90° and 180° Coffin and Raft Corners

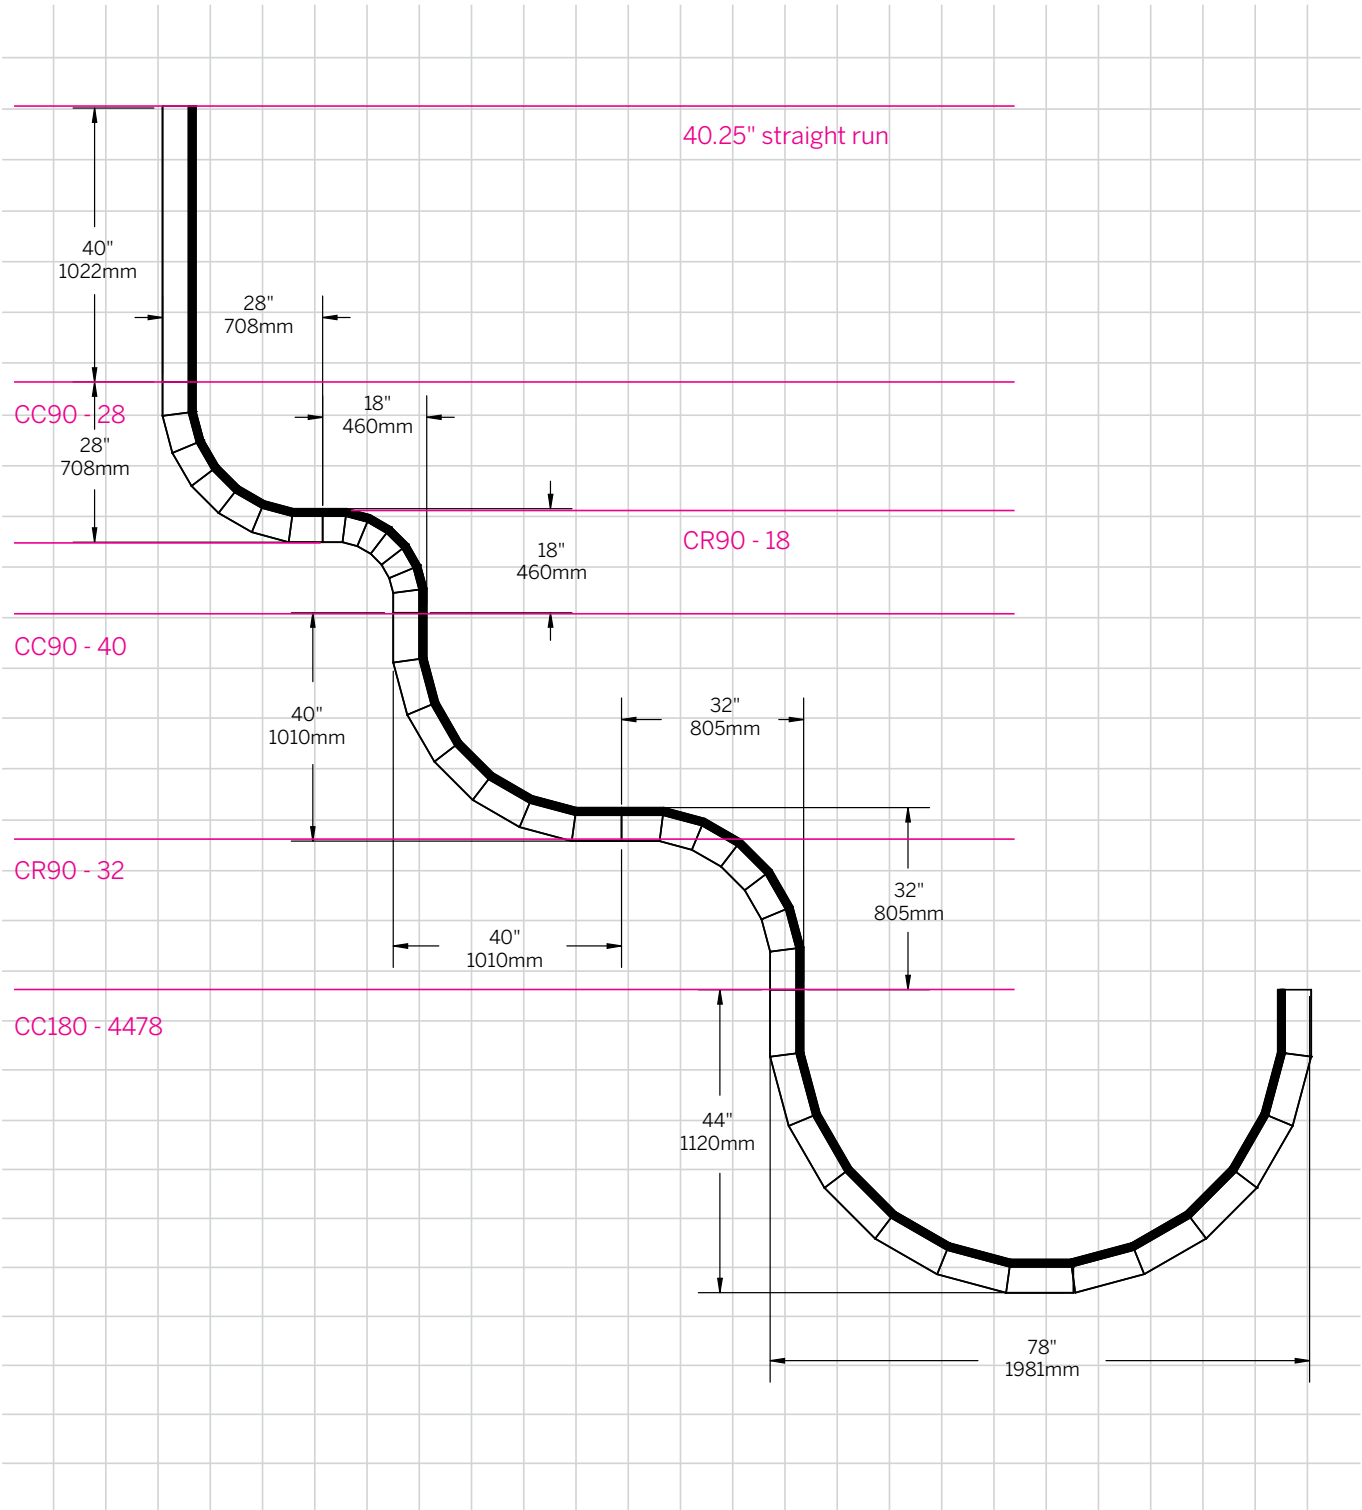

technical
information

