



Tools for educational lighting

inter•lux

# Language & Laughter Preschool

inter•lux





project: **Language & Laughter Preschool**  
location: **Brooklyn, NY**  
specifier: **O'Neill McVoy Architects**  
photography: **Nicholas Calcott**



## ProTools 60 Linear Perimeter

A continuous linear system that delivers even illumination to a wall from above the finished ceiling to illuminate a space and define vertical surfaces.

- 2.4" aperture, integrated solution that is compatible with all ceiling types.
- Standard and tailored run lengths, including corners. Soft Graze option to vary light center from the wall.
- Evenly illuminated perimeter lighting system with recessed optics minimizes brightness.
- Consistent LED technology throughout the Whitegoods product range.
- Easy to install housing allows the wall to continue above the finished ceiling.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (eldoLED).
- Efficacy up to 110 LPW (RML) | 152 LPW (RLW / RLB) | 140 LPW (REO) (delivered) @ 3000K, see photometry page for details.
- L70 (TM21 Projected 85C) Static White / Tunable White = 50,000 hours.
- ETL and ETL-C for dry and damp location.



## 1.5 In. ProTools Downlight Round Recessed

1.5" round aperture recessed downlight with 0.9" light aperture recessed 0.5" from ceiling plane.


- Part of a complete family of 1.5" aperture matching downlights.
- Very small aperture, low brightness downlight for general and accent illumination.
- High lumen output and excellent color rendition for all applications.
- Multiple housing styles for mounting into all ceiling types.
- Very shallow ceiling depth required for both integral and remote drivers.
- Extremely low brightness downlight with UGR < 16.

# Knox Road Mixed Use Development College Park


inter•lux



project: **Knox Road Mixed Use  
Development College Park**  
location: **College Park, MD**  
architect/specifier: **WDG Architecture**  
lighting designer: **CM Kling**  
photography: ©Anice Hoachlander

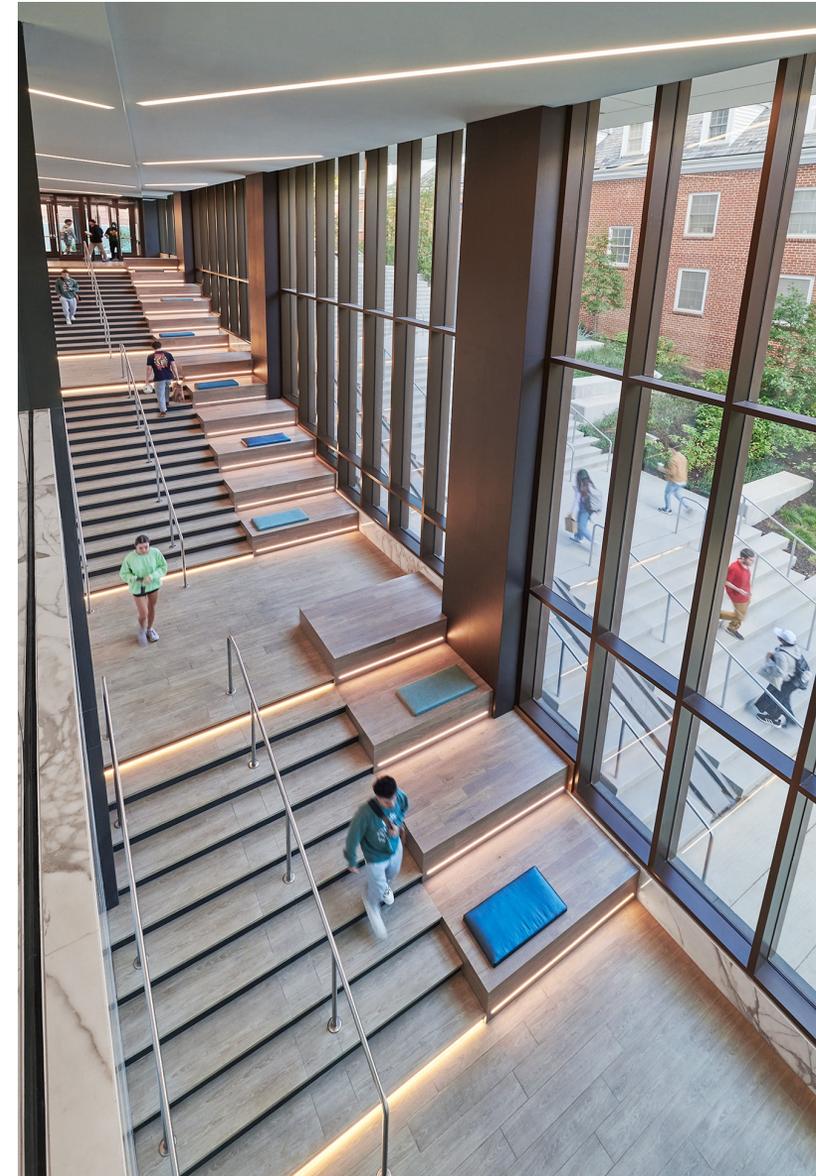


# Products Used

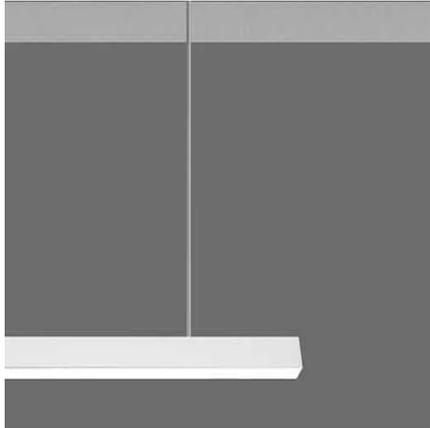

## 20 Linear Suspended

- Miniature suspended downlight for general, accent and decorative lighting.
- Power suspensions with small ceiling canopies.
- Multiple distribution options.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.

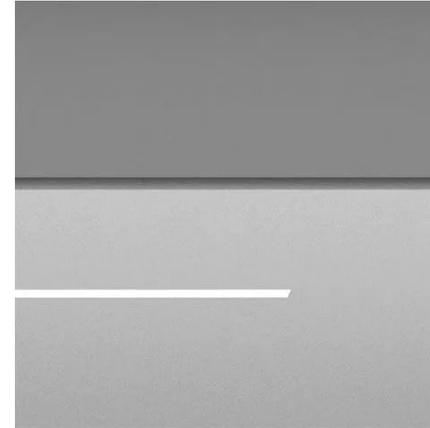

## 20 Linear Recessed

- Continuous line of light in a 0.7" wide recessed luminaire.
- Trimless and bezel trim for seamless integration into any drywall, wood and metal surfaces.
- Trimless installation into drywall without disturbing the wall structure.
- Straight runs and complex configurations with factory corners in exact lengths as specified.
- Multiple distribution options.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.

# Morgan State University Health and Human Services Center


inter•lux





project: **Morgan State University Health and Human Services Center**  
location: **Baltimore, MD**  
specifier: **MCLA**  
architect: **HOK Architects**  
photographer: © **Brad Feinknopf/OTTO**



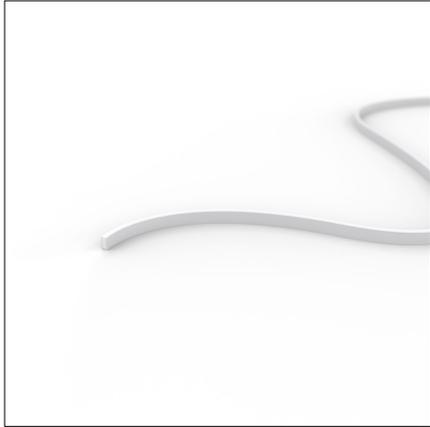

## Rubber 2D Mini

Rubber is a broad family of flexible lighting fixtures created to resolve even the most challenging architectural details and applications (columns, curved walls), both indoor and outdoor.

**Fixture Body:** Polyurethane resin blended into a PVC flexible channel. Rubber 2D Mini is Side Bend only (Min. Bending Radius 5.9”).

**Mounting/Casing:** Straight Aluminum channels and mounting clips.

**Drive-over:** Walk-Over only.

**Driver:** Remote, 24V DC Dimmable 0-10V or Non-Dim.

**Wattages/Sizes:** 1.8 W/ft. Individual fixture wattage: 6W (39.5”) – 30W (197”) – 60W (393.9”)


**IP rating:** IP67

**ETL Certification:** ETL, wet location

**Optics:** Fixed, diffused.

**Color temperatures:** 2200K – 2700K – 3000K – 3500K – 4000K.

**CRI:** 80+

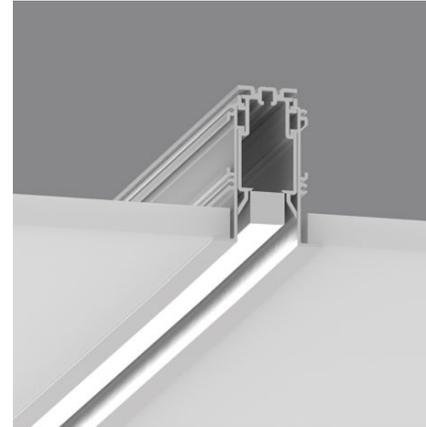

## 20 Linear Recessed – Flush

Compact and powerful continuous perimeter luminaire with plaster-in Plaster Trim knife-edge detail for a perfect finish. Delivers light smoothly down the wall from a concealed position.


- Miniature, fully recessed line of light.
- Trimless and bezel trim for all types of hard ceilings.
- Seamless integration into any drywall, wood and metal surfaces.
- Straight runs and configurations with factory corners in exact lengths as specified.
- Multiple distribution options.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.

# Georgetown Visitation Prep School

inter•lux



project: **Georgetown Visitation Prep School**  
location: **Washington, DC**  
specifier: **CGS Architects**  
photography: **photo by Chris Ambridge**

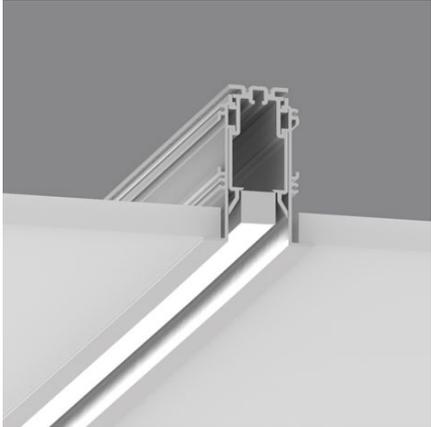

### 20 Linear Recessed – Flush

- Miniature, fully recessed line of light.
- Trimless and bezel trim for all types of hard ceilings.
- Seamless integration into any drywall, wood and metal surfaces.
- Straight runs and configurations with factory corners in exact lengths as specified.
- Multiple distribution options.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.

# Vanderbilt University Basketball Locker Rooms

inter•lux

A white Vanderbilt star logo, accented by a runway created with Linea Light's Archiline product, serves as a photo wall for social media posts in the women's locker room. Installed as a recessed in-grade line of light, Archiline provides wayfinding from the main entrance to the social media wall.

project: **Vanderbilt University**  
location: **Nashville, TN**  
architect: **Goodwyn Mills Cawood (GMC)**  
photography: **Aerial Innovations Southeast**

[Inter-lux.com](http://Inter-lux.com)



4-inch square downlights from the Whitegoods ProTools series were chosen to provide efficient and modern lighting for the kitchen, otherwise known as The Fuel Zone, and an adjacent lounge area. The ProTools series offers plaster trim and bezel trim fixed, wall wash and adjustable downlights with various cover options and accessories, creating a flexible and versatile range of luminaires with a single consistent minimal appearance throughout.



Whitegoods 20 Linear Surface lighting enhances the curvature of the wall in a meeting space created for the men's team. These thin lines of light easily integrate into the metal-paneled ceiling system with easily installed clips that are concealed within the fixture body. 20 Linear Surface is a versatile lighting tool designed to deliver general and accent illumination for any indoor application and in exact lengths. In addition to straight runs, complex configurations with factory corners can be factory built to exact lengths as specified.





### Archiline Frameless

**Fixture Body:** Corrosion resistant 6060 Aluminum, Anodized (15 µm), Black finish

**Trim:** Frameless, ideal for continuous runs. Extra clear glass – Tempered

**Mounting/Housing:** Anodized Black (15 µm) Aluminum 6060 housing (required for in ground installations).

**Drive-over:** Up to 11,023 lbs.

**Driver:** Integral, 120-277V Dimmable 0-10V or Non-Dim.

**Wattages/Sizes:** 14.5W (12.6") – 22W (20.1") – 44W (39.4")

**Safety features:** Built-in Aquastop® (Anti-wicking) and TCS® (Over tension and electrical discharge protection) systems.

**IP rating:** IP67

**ETL Certification:** ETL, wet location

**Optics:** Fixed or Adjustable. Available in Narrow Spot – Spot – Flood – Wide Flood – Elliptic, Asymmetric Wall Washer. Most Fixed variants are also available with Dark Light (Anti-glare) system.


**Color temperatures:** 2700K – 3000K – 3500K – 4000K.



### 4 In. ProTools Downlight Round Recessed (PTD4)

4" round aperture downlight for general illumination. Available with round recessed cone or regressed pinhole with 0.5" regressed 2" round light aperture.

- Part of a complete family of 4" aperture matching downlights.
- 4" (100mm) round aperture downlight for general illumination. Available with round regressed 2" round light aperture.
- Efficacy up to 67 lumens per watt (delivered).
- UGR < 19 for some configurations to comply with WELL requirements.
- CREE 2-step McAdam LEDs.
- CRI >92+ standard, 98+ optional.
- L70 (TM21 Projected 85C) Static White 55,400 hours, TW + WD 55,000 hours.
- ETL and ETL-C for dry and damp location standard, Wet location optional.
- Luminaire and driver installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available.
- Multiple luminaire configurations for plaster trim.

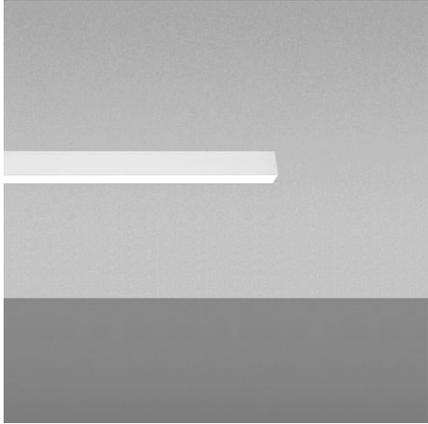

## 20 Linear Surface

- The most versatile lighting tool to deliver general and accent illumination for any indoor application from a 0.7" wide luminaire.
- Mounts via invisible clip to any surface, toolless mounting to grid ceilings, magnetic and adjustable bracket mounting.
- Straight runs and complex configurations with factory corners in exact lengths as specified.
- Multiple distribution options.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.

# Northern Virginia Community College

inter•lux






## 60 Linear Recessed Flush Lens

A continuous flush lens recessed linear luminaire with absolute minimal visual impact

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners, wall-to-wall and wall-to-ceiling configurations
- Flush lens for wide angle, even illumination
- Multiple control and connectivity options
- Consistent LED technology used throughout the Whitegoods product range
- Flexible design allows for installation from below with separate housing and gear tray for ease of installation and maintenance
- Flicker-free full range dimming with standard driver (Eldoled)

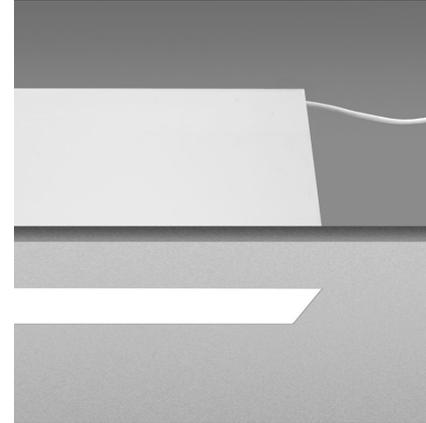

## 100 Linear Recessed Flush Lens

A continuous flush lens recessed linear luminaire with absolute minimal visual impact

- 4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners, wall-to-wall and wall-to-ceiling configurations
- Flush lens for wide angle, even illumination
- Multiple control and connectivity options
- Consistent LED technology used throughout the Whitegoods product range
- Flexible design allows for installation from below with separate housing and gear tray for ease of installation and maintenance
- Flicker-free full range dimming with standard driver (Eldoled)

# St. Johns College High School

inter•lux

The 15,000 square foot performing arts wing provides a modernized and expanded space for the music department with dedicated choir, orchestra and band rooms, practice rooms, and faculty offices. It also houses a new art studio with a patio for outdoor teaching and student projects. Additionally, the new wing includes three acoustically designed performance classrooms, three academic classrooms, and voluminous storage for multiple bands and hundreds of instruments.





project: **St. Johns College High School**  
location: **Chevy Chase, MD**  
architect: **Perkins Eastman**  
photography: **©Anice Hoachlander**





## 60 Linear Recessed Flush Lens

A continuous flush lens recessed linear luminaire with absolute minimal visual impact

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners, wall-to-wall and wall-to-ceiling configurations
- Flush lens for wide angle, even illumination
- Multiple control and connectivity options
- Consistent LED technology used throughout the Whitegoods product range
- Flexible design allows for installation from below with separate housing and gear tray for ease of installation and maintenance
- Flicker-free full range dimming with standard driver (Eldoled)



## 60 Linear Suspended Flush Lens

Suspended ceiling mount

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners, in suspended configurations
- Flush lens for wide angle, even illumination
- Multiple control and connectivity options
- Consistent LED technology used throughout the Whitegoods product range
- Flexible design allows for installation from below with separate housing and gear tray for ease of installation and maintenance
- Flicker-free full range dimming with standard driver (Eldoled)
- Lighting Made in the USA, Lighting Made in Maryland

### 4 in. ProTools Downlight (Shallow) Round Recessed (PTD4)

4" round aperture downlight for wide distribution general illumination. Available with round recessed cone or regressed pinhole with 0.5" regressed 2" round light aperture or high transmission, evenly illuminated flush full aperture diffuser.

- Part of a complete family of 4" aperture matching downlights.
- 4" (100mm) round aperture downlight for wide distribution general illumination. Available with round recessed cone or regressed pinhole with 0.5" regressed 2" round light aperture or high transmission, evenly illuminated flush full aperture diffuser.
- Efficacy up to 77 lumens per watt (delivered).
- CREE 3-step McAdam LEDs.
- CRI >92+ standard.
- L70 (TM21 Projected 85° C) Static White = 102,000 hours.
- ETL and ETL-C for dry and damp location standard, Wet location optional.
- Luminaire and driver installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available.
- Multiple luminaire configurations for plaster trim.

### 100 Linear Recessed Flush Lens

A continuous flush lens recessed linear luminaire with absolute minimal visual impact

- 4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners, wall-to-wall and wall-to-ceiling configurations
- Flush lens for wide angle, even illumination
- Multiple control and connectivity options
- Consistent LED technology used throughout the Whitegoods product range
- Flexible design allows for installation from below with separate housing and gear tray for ease of installation and maintenance
- Flicker-free full range dimming with standard driver (Eldoled)



Tools for educational lighting

inter•lux