


ProTools 60 Linear Wall Wash Recessed

inter•lux

WG-60PTLWW-...-LML-WW-...-W-W
Delivered Lumens Per Foot

		Power			
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
CCT	927	268	504	774	1141
	930	279	524	806	1188
	935	289	543	836	1244
	940	297	558	858	1278
		Power Multiplier			
		P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
		0.24	0.44	0.68	1.00
		CCT Multiplier			
		927	930	935	940
		0.96	1.00	1.04	1.06



BEAM ANGLE (0-180) = 57.8
BEAM ANGLE (90-270) = 102


WG-60PTLWW-...-TW-LML-WW-...
Delivered Lumens Per Foot

		Power	
		P2 [6 W/ft]	P3 [10 W/ft]
CCT	2200	254	375
	4000	261	395

UGR + FIXTURE EFFICIENCY

		UGR ¹			
		P1 [3W/ft]	P2 [6W/ft]	P3 [10W/ft]	P4 [15W/ft]
OPTIC/ BEAM	LML-WW	31.1	33.3	34.8	36.1

WG-60PTLWW-...-S-930-LML-WW-P2
10'-0" ceiling height

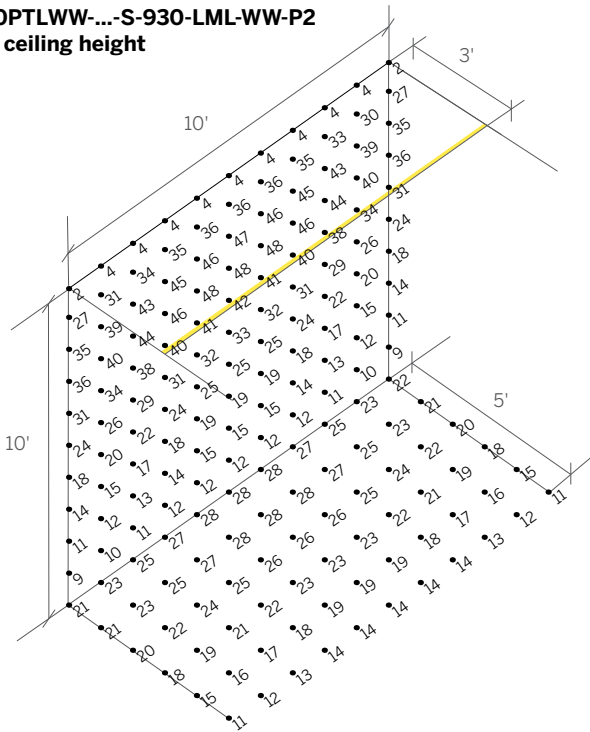

Surface reflectances:

80% Ceiling
50% Wall
20% Floor

Illuminance points are spaced 1'-0" on center.
Illuminance values are shown in units of foot-candles.

1 UGR value noted is the maximum UGR (crosswise) with
930 LEDs at noted Power level.

WG-60PTLWW-...-S-930-LML-WW-P4
20'-0" ceiling height

