


ProTools 60 Linear Wall Wash Recessed




inter•lux

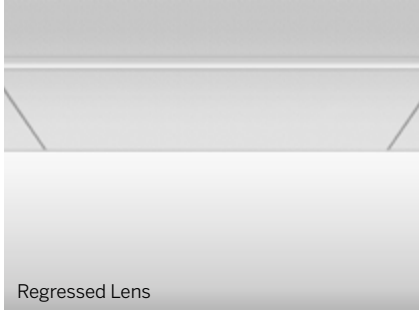

Regressed Lens



Recessed Lens



Recessed Lens
+ Wall Wash
(LML + WW)

Plaster Trim Cutout
Width: 3" / Length: fixture length + 1/2"
Ex: 96" fixture = 96 1/2" cutout length

Bezel Trim Cutout
Width: 2 7/8" / Length: fixture length + 1/8"
Ex: 96" fixture = 96 1/8" cutout length

Ordering Information											
WG-60PTLWW					LML	WW					
Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ⁵	Driver ⁶	Housing Finish ⁷	Reflector Finish ⁷	Options
WG-60PTLWW	RPT RBT RGT9 RGT15 RGTS	S PI ¹ PO ¹ PZ ¹	24 48 96 XX ³	927 930 935 940 TW ⁴	LML	WW	P1 P2 P3 P4	E1 L1 POE BT DALI	W (std) S F	W (std) S F	CP EM NYC TF WC

Luminaire

- 2.4" aperture, integrated solution that is compatible with all ceiling types.
- Standard and tailored run lengths, including corners
- Wash to 30' wall height.
- Extreme brightness control and the elimination of disturbing glare.
- Modularity of insert modules for ultimate design flexibility.
- Consistent LED technology throughout the Whitegoods product range.
- Evenly illuminate the wall from top to the bottom with smooth gradation.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (Eldoled).
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid
- RGTS = Recessed trim for slot grid

Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K⁴

Optic

- LML = Linear micro-prismatic lens

Beam

- WW = Wall Wash

Power⁵

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver⁶

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)

Housing / Trim Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Reflector Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed
- WC = Wood Ceiling (trimless - accessible ceilings only)

1 See pattern spec sheet.

2 Individual fixture lengths less than 2' may require remote driver.

3 For Lensed products, specify to nearest 0.25".

4 TW only available for P2 and P3.

5 See photometric data sheet for delivered lumens.

6 See power supply page for details.

7 See Tiger Drylac color chart: inter-lux.com/tiger